Product installation and specification guide

2015

BOSCH
Invented for life

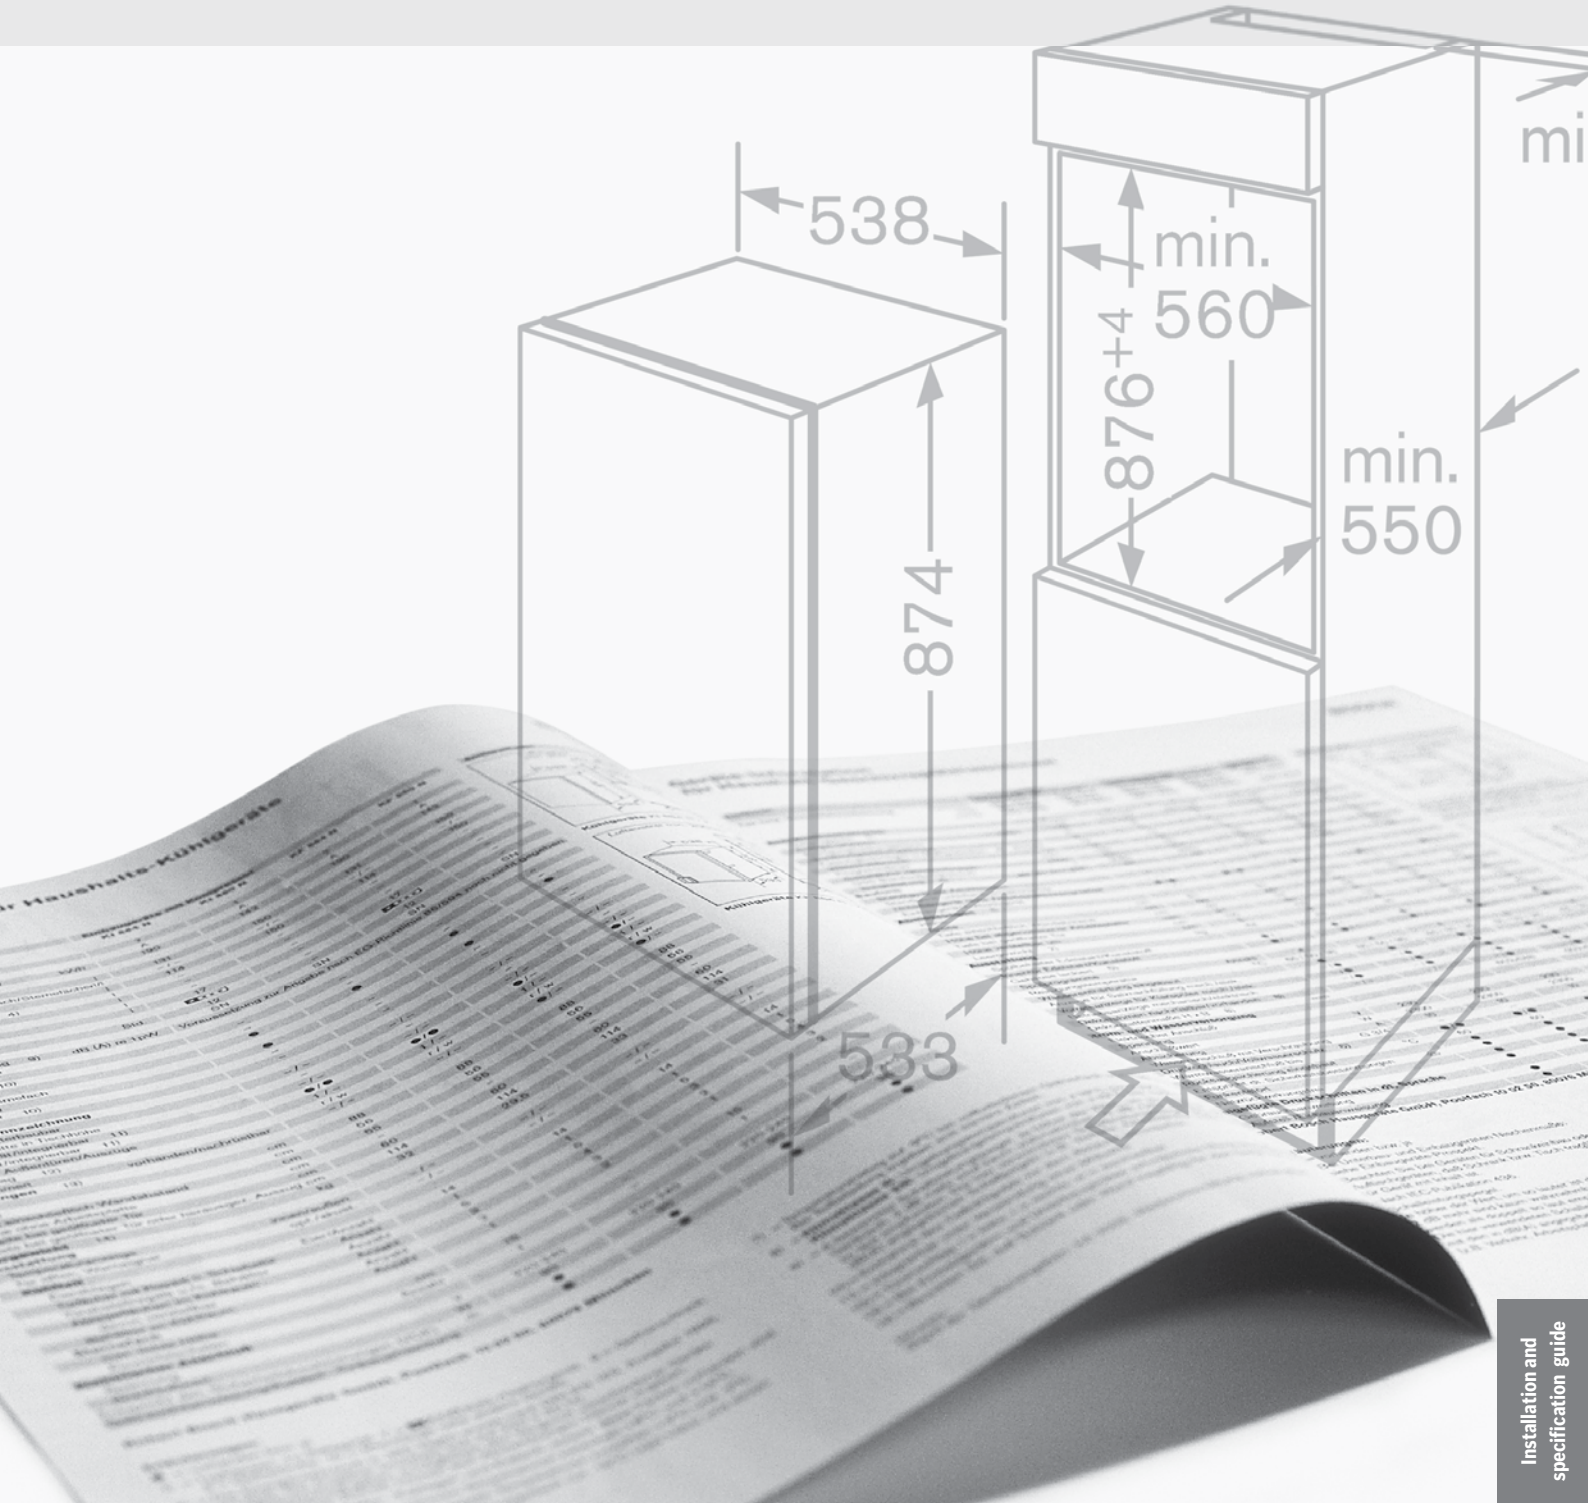

Installation tips

Ovens, microwaves and hobs

Flexibility to choose the way you want to cook
Whether you're creating a feast for fifteen, steaming a healthy meal, cooking for one or popping on a frozen meal, Bosch appliances have the flexibility to do the job.

Built-in single and double ovens
The beauty of built-in ovens is that they can be housed in a variety of positions. For optimum convenience, install in standard tall cabinets at a level to suit the main users. Install single ovens alone, or together with a combination oven/microwave, built-in microwave, steam or combination steam oven. Hobs need to be bought separately.



Built-under single and double ovens
Single ovens can also be installed under the work surface, directly below the hob, or apart from it. Bosch also offers double ovens that are specifically designed for installation under the work surface. Hobs need to be bought separately.



Compact steam, combination ovens and combination microwave ovens
Compact appliances offer a range of combination or specialist functions – for example steam cooking is one of the healthiest methods of cooking available – and are ideal if space is at a premium. If you have more room, they're perfect for providing extra capacity and flexibility above or alongside a suitable built-in single oven. Build in to a standard tall or base cabinet with or without a warming drawer.



Standard built-in microwaves
Depending on the model, you can install into a tall housing, or in a wall cupboard. Wall cupboard models are available in 50cm or 60cm widths, and all come with installation/trim kit.



Hobs
Choose from gas, induction, ceramic or sealed plate. Available in 5 widths: 30, 60, 70, 80 or 90cm.



Quick checklist

Ovens
- Standard single oven
- Double oven
- Built-under
- Built-in at eye level

Self-cleaning function
- Pyrolytic self-cleaning function
- EcoClean® self-cleaning programme

Steam oven/combination oven/ combination microwave
- Steam combination oven
- Steamer
- Combination oven
- Combination microwave

Built-in
- Built-under
- Built-in wall cupboard installation

- 50cm wide
- 60cm wide

Hobs
- Gas
- Induction
- Ceramic
- Sealed plate

- 30cm wide
- 60cm wide
- 70cm wide
- 80cm wide
- 90cm wide

Installation tips

Hoods

Keep air fresh and free of cooking smells
Extractor hoods are an integral part of a clean and fresh working kitchen environment. Not only do Bosch extractor hoods look good and add a professional touch to your kitchen, they also deal quietly and efficiently with the key tasks of eliminating unwanted odours and removing grease and moisture from the kitchen.

Chimney extractor hoods
Choose between wall-mounted models or an island version to create a striking focal point in the kitchen. Some models are further enhanced by glass canopies. Available 60, 70 and 90cm wide.



Chimney extractor easy mounting system
Installing your new cooker hood in the kitchen is quick and straightforward with the patented easy mounting system. The self-levelling fixing rings allow you to precision adjust the horizontal position of the hood by up to a 6mm radius.

Slimline extractor
Ideal where an unobtrusive extractor is required. Built into a wall cabinet above the hob, it can be extended when in use, and retracted when not. Use the special handle profile accessory, or if you prefer, a matching pelmet from your kitchen supplier. 60 or 90cm wide.



Conventional extractor hoods
Ideal where space is at a premium, these 14cm tall extractors can be mounted directly to the wall or suspended beneath a reduced height wall cupboard. 60cm wide.



Integrated extractor hoods
Integrated extractor hoods are designed to be mounted between two cabinets with a matching furniture door affixed to the front.



Canopy extractor hoods
Designed to fit discreetly into the base of a wall cupboard, or specially designed furniture canopy with operation from below. 60cm wide.



Choosing the correct extractor
As a guideline, the air in the room should be changed 6-12 times per hour. Calculate the floor area in square metres and multiply by the height of the room in metres. Then divide the maximum extraction rate (not freeblowing) of the hood selected by the figure calculated above. The resulting figure should be at least 7, but preferably as close to 12 as possible.

Example
Kitchen (H x W x D) metres 2.1 x 4.5 x 4.2 = 39.7m³.
Assume 10 air changes per hour – multiply 39.7m³/h by 10 = 397m³/h.
Choose a hood capable of extracting at least this amount of air per hour – e.g. DWB097A50B (max ducted extraction rate 460m³ per hour).

To avoid excessive noise, try to select a model which meets the above requirements on an intermediate speed, rather than at the highest speed.



10 x 39.7m³ = 397m³

Quick checklist

Type of hood

- ☐ Chimney
- ☐ Slimline
- ☐ Conventional
- ☐ Integrated
- ☐ Canopy
- ☐ Ducted
- ☐ Re-circulated
- ☐ Size
- ☐ Size of kitchen

Ducted or recirculation mode?

Ducted extraction

Ducting out is the most effective method of extraction if the hood can be sited on an outside wall, or an outside wall can be reached via ducting. The main difference between ducted and recirculation cooker hoods is that ducted systems can extract steam and odours, as well as grease. All our extractors are now standardized to a 150mm diameter outlet for easier installation. Use of 120/125mm diameter ducting is also possible, but will result in reduced air flow and increased noise. Use of 100mm diameter ducting is not recommended.

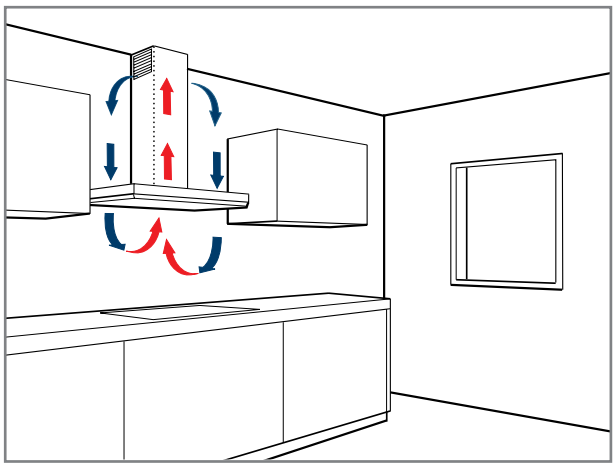

The following points should be observed for optimum ducted extraction results:

1. Ensure any pipe elbow bends are at least 30cm from the hood ducting opening.
2. Avoid reducing the diameter or area of the ducting.
3. Use wide-angled pipe elbows, but keep the number used to a minimum.
4. Only install pipes with smooth, even inner surfaces. If a flexible hose has to be used, ensure it is pulled tight to smooth out the ridges before fixing.
5. Avoid reducing the diameter or area of the ducting.
6. Use ducting pipes with a diameter of at least 120mm, but ideally 150mm.
7. Keep piping to a minimum – use the most direct route to external outlet.
8. Make sure that there is an adequate supply of fresh air to replace the air ducted out of the kitchen i.e. windows that can be opened, doors to adjacent rooms, air bricks.

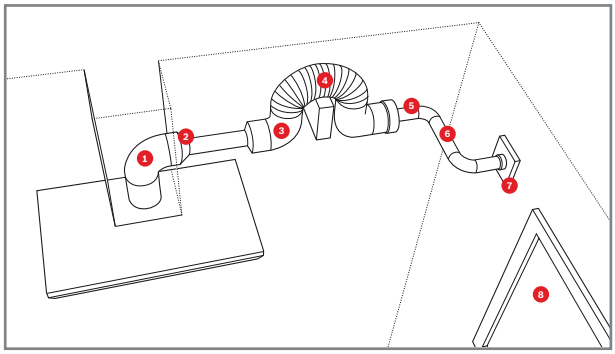

Problems with installation may occur if points 1 to 8 are not observed.

Recirculation kit

Cooker hoods with recirculation are energy-efficient and much easier to install. Air is passed through the metal filter to extract the grease and then through a special charcoal filter, which removes odours. The purified air is then returned to the room. As no ducting openings are necessary, this is an energy efficient method of extraction as no energy can escape (ie. cool air in the summer or warm air in the winter), making it a good choice for low energy houses. The kit contains all you need to set the hood up for recirculation and installation is relatively easy. Check each model for details on the appropriate recirculation kit accessory.

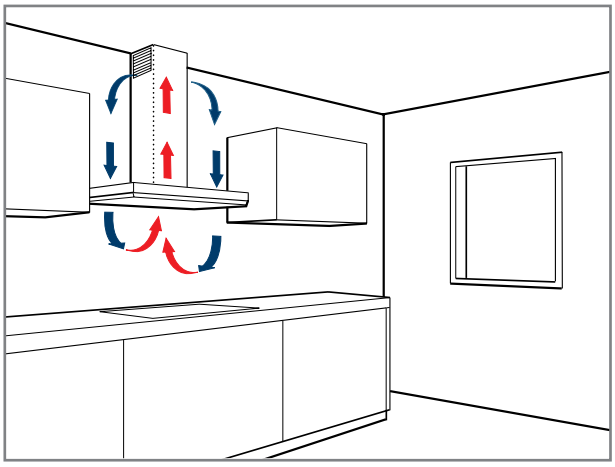

Tips and hints

1. Calculate the extraction capacity needed.
2. Choose a hood with at least the same width of your hob.
3. Ensure efficient pipe ducting installation.
4. The hood should be installed at a minimum of 65cm above a gas hob or 55cm above an electric hob.
5. To effectively remove cooking odours from your kitchen, switch the hood on 5-10 minutes prior to cooking.
6. Leave the hood to run at a low setting after cooking has finished for 5-10 minutes to remove any lingering odours. Or simply select the Automatic After Running function, which enables the hood to continue running at a low speed for 10 minutes before automatically turning itself off (available on selected models).
7. Regularly clean metal grease filters to ensure optimum extraction performance. All of our metal grease filters, brushed steel filters and rim ventilation filters are dishwasher-proof.

Installation tips

Integrated cooling

Individual, versatile and low on energy consumption
Bosch's range of fridges and freezers is as varied as today's lifestyle. With an impressive range of features and models on offer, there is something to suit everyone's shopping and cooking habits.

Built-in fridges and freezers, integrated
These models are designed to be built into standard cabinets. Door panels matching your kitchen cabinets are bolted to the appliance doors so that they blend in perfectly. Please ensure that recess height is correct. Door panels and cabinets should be obtained from your kitchen cabinet supplier.



Built-under fridges and freezers, integrated
These models can be built under a continuous worktop between two cabinets, or at the end of a row of cabinets. A furniture door blends your appliance with the rest of your kitchen.



Recess dimensions
Built-under models permit variable plinth heights and are therefore suitable for different worktop heights. Dimensions (H x W): 100 x 600mm, 820 x 600mm, 870 x 600mm. Ventilation is through the plinth, no worktop cutting required.



Hinge systems
Flat hinges
This innovative easy-to-fit hinge system requires no extra drilling and permanently secures the appliance door to the furniture door. Offers a generous opening angle of 115° and features automatic door closing at an angle of less than 20°. Some models feature SoftClose doors, a damping system that means you can push your door to and it will close silently without a 'clunk', and it will never swing back open.

Flat-type hinge system



Sliding hinges
A sliding hinge, attached to a slide connector is pre-fitted in the factory, this allows the appliance door to be coupled with the furniture door. It offers adjustment in depth and height for precise fitting.

Sliding hinge system



Quick checklist

Type
- ☐ Built-in fridge, integrated
- ☐ Built-in freezer, integrated
- ☐ Built-in fridge freezer, integrated
- ☐ Bulit-under fridge, integrated
- ☐ Built-under freezer, integrated

- ☐ Height:
- ☐ Width:

Hinge system
- ☐ Flat hinge system
- ☐ Sliding hinge system

Installation tips

Dishwashers

Integrated and semi-integrated dishwashers
Energy and water-efficient with outstanding performance, Bosch integrated dishwashers quietly do all the hard work for you behind closed doors.

Fully integrated dishwashers
These models can be built under a worktop or sink drainer, between two units or at the end of a run of units. A furniture door is mounted on the appliance door so that the dishwasher is indistinguishable from other kitchen cabinets. Choose from full size 60cm wide, or slimline 45cm wide.

60cm wide



45cm wide



Semi-integrated dishwashers
A furniture door is mounted on the appliance door, so all that is seen of the dishwasher itself is the stylish control panel. Can be built under a worktop or sink drainer, between two units or at the end of a run of units. Available full size 60cm wide.

60cm wide



45cm wide



Built-in dimensions (60m wide)
If you have a recess height of 81.5 – 87.5cm, plan for an 81cm dishwasher. The appliance feet may be screwed out to a total height of 87.5cm. Or, if you have a recess height of 86.5 – 92.5cm plan for an 86cm dishwasher. The appliance feet screw out to a total height of 92.5cm.



Quick checklist

Type
Fully integrated dishwasher
- 60cm wide
- 45cm wide

Semi-integrated dishwasher (60cm wide)
- 81cm high
- 86cm high

Ovens technical diagrams

Single and double ovens

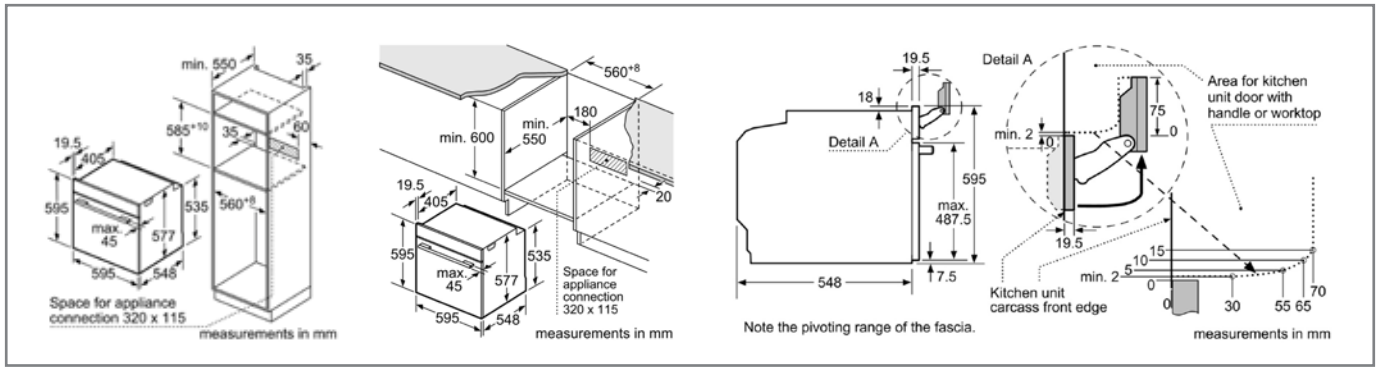

Single ovens built in and built under (except HBA23B150B, HBA13R150B and HBM13B1.0B)

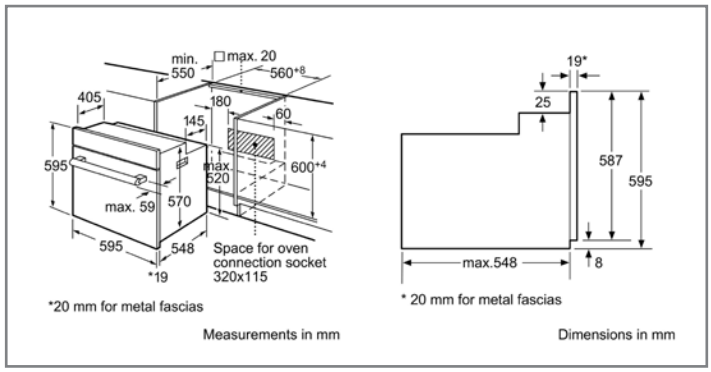

HBA23B150B, HBA13R150B and HBM13B1.0B



Built-in double ovens
HBM13B550B | HBM56B551B | HBM53R550B | HBM43B2.0B | 13B2.1B



Built-under double ovens
HBN53R550B | 43B2.0B | 13B2.1B

We try to keep up to date with constant technological improvements, so from time to time we may update installation guidelines. Therefore we strongly recommend that you download the latest installation guidelines from www.bosch-home.co.uk. Line drawings are for guidance only, and we recommend that you refer to the latest installation guidelines. Though every care is taken to ensure instructions are correct at the time of printing, Bosch cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

Single ovens specifications

	Serie 8			Serie 6		Serie 8		Serie 6
Oven type	**Pyrolytic with Added Steam**	**Pyrolytic**	**Pyrolytic**	**Pyrolytic**	**Pyrolytic**	**Standard**	**Standard**	**Standard**
Brushed steel	**HRG6769S1B**	**HBG6764S1B**	**HBG674BS1B**	**HBA73R350B**	**HBA63B150B**	**HBG656RS1B**	**HBG634BS1B**	**HBA53R350B**
Black	**-**	**HBG6764B1B**	**HBG674BB1B**	**-**	**-**	**HBG656RB1B**	**HBG634BB1B**	**-**
White	-	-	-	-	-	-	-	-
KEY FEATURES								
3 TFT colour and graphics displays with direct text touch	●	●	-	-	-	●	-	-
1 TFT colour and text display with touch buttons	-	-	●	-	-	-	●	-
SoftClose/SoftOpen drop down door	●/●	●/●	●/●	-	-	●/●	●/●	-
Digital temperature display with proposal	●	●	●	-	-	●	●	-
Actual temperature display	●	●	●	-	-	●	●	-
Heating up / residual heat indicator	●/●	●/●	●/●	-/-	-/-	●/●	●/●	-/-
Sabbath setting	●	●	●	-	-	●	●	-
Pyrolytic self cleaning function	●	●	●	●	●	-	-	-
Pyrolytic proof tray/holder & baking tray	●	●	●	-	-	-	-	-
ecoClean® back/roof/side surfaces	-	-	-	-	-	●/●/●	●/-/-	●/●/●
EcoClean® cleaning programme	-	-	-	-	-	●	-	-
BoschAssist	●	●	-	-	-	●	-	-
Perfect Roast Multi-point temperature probe	●	●	-	-	-	●	-	-
PerfectBake Sensor	●	●	-	-	-	●	-	-
Automatic cooking programmes	-	-	-	-	-	-	-	-
DESIGN								
Control panel height mm	96	96	96	115	115	96	96	115
Control wheel	●	●	●	-	-	●	●	-
Push buttons or keys	-	-	-	●	●	-	-	●
Steel handle fixing blocks	●	●	●	-	-	●	●	-
Black handle fixing blocks	-	-	-	●	●	-	-	●
FEATURES								
Electronic clock timer with automatic on/off programmer	White	White	White	Red	Red	White	White	Red
Main on/off switch	●	●	●	-	-	●	●	-
Interior lights	3 x LED	1 x Halogen	1 x Halogen	1 x 40W	1 x 40W	1 x Halogen	1 x Halogen	1 x 40W
Light on/off when oven door opened/closed	●	●	●	-	-	●	●	-
Automatic safety switch off	●	●	●	●	●	●	●	-
Control panel lock	●	●	●	●	●	●	●	●
Start button	●	●	●	-	-	●	●	-
Water tank empty indicator	●	-	-	-	-	-	-	-
Enamelled oven interior	●	●	●	●	●	●	●	●
Number of shelf positions	5	5	5	5	5	5	5	5
Retractable control dial(s)	-	-	-	●	●	-	-	●
Fixed Controls	-	-	-	-	-	-	-	-
Full glass inner door	●	●	●	●	●	●	●	●
PROGRAMMES / FUNCTIONS								
4D Hot Air	●	●	●	-	-	●	●	-
3D Hot Air	-	-	-	●	●	-	-	●
HotairEco	●	●	●	●	●	●	●	●
Conventional top & bottom heat	●	●	●	●	●	●	●	●
Conventional heat eco	●	●	●	-	-	●	●	-
Hot air grilling	●	●	●	●	●	●	●	●
Full width variable grill	●	●	●	●	●	●	●	●
Half width variable grill	●	●	●	●	-	●	●	●
Pizza Setting	●	●	●	●	-	●	●	●
Bottom heat	●	●	●	●	●	●	●	●
Intensive heating	●	-	-	-	-	-	-	-
Low temperature cooking	●	●	●	-	-	●	●	-
Defrost	●	●	●	●	-	●	●	●
Preheating	●	●	●	-	-	●	●	-
Plate warming	●	●	●	-	-	●	●	-
Dehydrate	●	-	-	-	-	-	-	-
Added steam function	●	-	-	-	-	-	-	-
Steam descaling & cleaning	●	-	-	-	-	-	-	-
Cavity drying function	●	-	-	-	-	-	-	-
Steam reheating and dough proving functions	●	-	-	-	-	-	-	-
Fast heat	●	●	●	●	●	●	●	●
PERFORMANCE / TECHNICAL SPECIFICATIONS								
Cavity dimensions (HxWxD in mm)	357x480x415	357x480x415	357x480x415	329x479x400	329x479x400	357x480x415	357x480x415	329x479x420
Oven capacity (L)[1]	71	71	71	63	63	71	71	66
Water tank capacity (L)	1	-	-	-	-	-	-	-
Energy efficiency rating 1	A	A+	A+	A	A	A+	A+	A
Efficiency declared on	Hot Air	Hot Air	Hot Air	Hot Air	Hot Air	Hot Air	Hot Air	Hot Air
Energy consumption hot air (kWh)	0.74	0.69	0.69	0.70	0.70	0.69	0.69	0.82
Energy consumption conventional (kWh)	0.90	0.87	0.87	0.93	0.93	0.87	0.87	0.95
Time to cook standard load (mins.)	44	42	42	48	48	42	42	47
Largest baking sheet area (in cm1)	1290	1290	1290	1350	1350	1290	1290	1350
Cable length (in cm)	120	120	120	150	150	120	120	150
Total connected loading (W)	3450	3450	3450	3650	3650	3450	3450	3500
STANDARD ACCESSORIES								
Full width enamelled pan	1	1	1	1	1	1	1	1
Wire pan insert	-	-	-	1	1	-	-	1
Wire shelves	2	2	2	2	2	2	2	2
Extendible telescopic shelves	3 levels	1 level	-	1	-	1 level	-	1
OPTIONAL ACCESSORIES								
Baking sheet	HEZ631070	HEZ631070	HEZ631070	-	-	HEZ631070	HEZ631070	-
Wire shelf	HEZ634000	HEZ634000	HEZ634000	-	-	HEZ634000	HEZ634000	-
Fully extendible telescopic shelf rail (1 level)	-	-	HEZ638170	-	-	-	HEZ638100	-
Fully extendible telescopic shelf rails (3 levels)	-	-	-	HEZ338357	HEZ338357	-	-	HEZ338357
Extra deep enamelled roasting pan	-	-	-	HEZ333000	HEZ333000	-	-	HEZ333000

● = Yes
- = No

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

[1] According to norm EU 65/2014

Energy rating: According to Norm EN50304; 2014 update 65/2014

A+++ = more efficient, D = less efficient

Standard	Standard	Standard
HBA23B150B	**HBA13R150B**	**HBA13B150B**
-	**-**	**HBA13B160B**
-	**-**	**HBA13B120B**
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
●/-/-	-/-/-	-/-/-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
115	115	115
-	-	-
●	●	●
-	-	-
●	●	●
Red	Red	Red
-	-	-
1 x 40W	1 x 40W	1 x 40W
-	-	-
-	-	-
●	●	●
-	-	-
-	-	-
●	●	●
5	5	5
-	-	-
●	●	●
●	-	-
-	-	-
●	●	●
-	-	-
●	-	-
-	-	-
●	●	●
●	●	●
-	-	-
-	-	-
●	-	-
-	-	-
-	-	-
-	●	●
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
●	-	-
329x479x420	329x479x420	329x479x420
66	66	66
-	-	-
A	A	A
Hot Air	Hot Air	Hot Air
0.84	0.82	0.82
0.93	-	-
45	45	45
1350	1350	1350
120	120	120
3500	2900	2900
1	1	1
1	1	1
2	2	2
-	1	-
-	-	-
-	-	-
-	-	-
HEZ338357	HEZ338357	HEZ338357
HEZ333000	HEZ333000	HEZ333000

Double ovens specifications

	Serie 6									
Oven type	**Built-In Double**		**Built-In Double**		**Built-In Double**		**Built-In Double**		**Built-In Double**	
Brushed steel	**HBM56B551B**		**HBM53R550B**		**HBM13B550B**		**HBM43B250B**		**HBM13B251B**	
Black	**-**		**-**		**-**		**HBM43B260B**		**HBM13B261B**	
White	**-**		**-**		**-**		**-**		**HBM13B221B**	
KEY FEATURES	**Main**	**2nd**	**Main**	**2nd**	**Main**	**2nd**	**Main**	**2nd**	**Main**	**2nd**
Electronic control	●	-	-	-	-	-	-	-	-	-
Digital temperature display with proposal	●	-	-	-	-	-	-	-	-	-
Digital symbol & function display	●	-	-	-	-	-	-	-	-	-
Heating up / residual heat indicator	●/●	-	-	-	-	-	-	-	-	-
Actual temperature display	●	-	-	-	-	-	-	-	-	-
Automatic safety switch off	●	-	-	-	-	-	-	-	-	-
EcoClean® back/roof/side liners	●/●/●	●/●/●	●/●/●	●/●/●	●/-/-	●/●/-	●/●/●	●/●/●	●/ - / -	●/●/-
EcoClean® cleaning programme	●	●	●	●	-	-	-	-	-	-
DESIGN										
Control panel height mm	115		115		115		115		115	
Display window	Twin	-	Single	-	Single	-	Single	-	Single	-
Central illuminated control dial	●	-	-	-	-	-	-	-	-	-
Metal touch controls	●	-	-	-	-	-	-	-	-	-
Push buttons	-	-	-	-	-	-	-	-	-	-
Steel handle fixing blocks	●	●	●	●	●	●	-	-	-	-
Black handle fixing blocks	-	-	-	-	-	-	●	●	●	●
Drop down door	●	●	●	●	●	●	●	●	●	●
FEATURES	**Main**	**2nd**	**Main**	**2nd**	**Main**	**2nd**	**Main**	**2nd**	**Main**	**2nd**
Electronic clock timer with automatic on/off programmer	●	-	●	-	●	-	●	-	●	-
Retractable control dial(s)	●	●	●	●	●	●	●	●	●	●
Fixed Controls	-	-	-	-	-	-	-	-	-	-
Interior lights	1	1	1	1	1	1	1	1	1	1
Control panel lock	●/-	-	●/-	-	●/-	-	●/-	-	●/-	-
Smooth enamelled oven interior	●	●	●	●	●	●	●	●	●	●
Number of shelf positions	5	2	5	2	5	2	5	2	5	2
Full glass inner door	●	●	●	●	●	●	●	●	●	●
Heat reflective glass	●	●	●	●	●	●	●	●	●	●
PROGRAMMES / FUNCTIONS	**Main**	**2nd**	**Main**	**2nd**	**Main**	**2nd**	**Main**	**2nd**	**Main**	**2nd**
HotairEco	●	-	-	-	-	-	-	-	-	-
3D Hot Air	●	-	●	-	●	-	●	-	●	-
Defrost	●	-	●	-	●	-	-	-	●	-
Pizza Setting	●	-	●	-	-	-	-	-	-	-
Conventional top & bottom heat	●	●	●	●	-	●	●	●	-	●
Bottom heat	●	●	●	-	-	-	●	-	-	-
Full width variable grill	●	●	●	●	-	●	●	●	-	●
Half width variable grill	●	●	●	●	-	-	-	●	-	-
Hot air grilling	●	-	●	-	-	-	●	-	-	-
Keep warm	●	-	-	-	-	-	-	-	-	-
Sabbath setting	●	-	-	-	-	-	-	-	-	-
AutoCook programmes	40	-	-	-	-	-	-	-	-	-
Fast heat	●	-	●	-	-	-	●	-	-	-
PERFORMANCE / TECHNICAL SPECIFICATIONS	**Main**	**2nd**	**Main**	**2nd**	**Main**	**2nd**	**Main**	**2nd**	**Main**	**2nd**
Cavity dimensions (HxWxD in mm)	329x482x418	172x468x433	329x482x418	172x468x433	351x482x418	172x468x433	329x482x418	172x468x433	351x482x418	172x468x433
Oven capacity (L)[1]	66	35	66	35	71	35	66	35	71	35
Energy efficiency rating 1	A	B	A	B	A	B	A	B	A	B
Efficiency declared on	Hotair	Conv.	Hotair	Conv.	Hotair	Conv.	Hotair	Conv.	Hotair	Conv.
Energy consumption hot air (kWh)	0.70	-	0.84	-	0.80	-	0.84	-	0.80	-
Energy consumption conventional (kWh)	0.96	0.79	0.96	0.79	-	0.79	0.96	0.79	-	0.79
Time to cook standard load (mins.)	44	46	44	46	44	46	44	46	44	46
Largest baking sheet area (in cm1)	1350		1350		1350		1350		1350	
Cable length (in cm)	-		-		-		-		-	
Total connected loading (W)	5500		5500		4400		5500		4400	
STANDARD ACCESSORIES										
Full width enamelled pan	1		1		1		1		1	
Wire pan insert	1		1		1		1		1	
Wire shelves	3		3		3		3		3	
OPTIONAL ACCESSORIES										
Fully extendible telescopic shelf rails (3 levels)	HEZ338357	-	HEZ338307	-	HEZ338357	-	HEZ338357	-	HEZ338357	-
Extra deep enamelled roasting pan	HEZ333000		HEZ333000		HEZ333000		HEZ333000		HEZ333000	

● = Yes
- = No

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.
[1] According to norm EU 65/2014
Energy rating: According to Norm EN50304; 2014 update 65/2014
A+++ = more efficient, D = less efficient

Built-Under Double		Built-Under Double		Built-Under Double	
HBN53R550B		HBN43B250B		HBN13B251B	
-		HBN43B260B		HBN13B261B	
-		-		HBN13B221B	
Main	**2nd**	**Main**	**2nd**	**Main**	**2nd**
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
●/●/●	●/●/●	●/●/●	●/●/●	●/ - / -	●/●/-
●	●	-	-	-	-
96		96		96	
Single	-	Single	-	Single	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
●	●	-	-	-	-
-	-	●	●	●	●
●	●	●	●	●	●
Main	**2nd**	**Main**	**2nd**	**Main**	**2nd**
●	-	●	-	●	-
●	●	●	●	●	●
-	-	-	-	-	-
1	1	1	1	1	1
●/-	-	●/-	-	●/-	-
●	●	●	●	●	●
3	2	3	2	3	2
●	●	●	●	●	●
●	●	●	●	●	●
Main	**2nd**	**Main**	**2nd**	**Main**	**2nd**
-	-	-	-	-	-
●	-	●	-	●	-
●	-	-	-	●	-
●	-	-	-	-	-
●	●	●	●	-	●
●	-	●	-	-	-
●	●	●	●	-	●
●	●	-	●	-	-
●	-	●	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
●	-	●	-	-	-
Main	**2nd**	**Main**	**2nd**	**Main**	**2nd**
255x468x418	172x468x433	255x468x418	172x468x433	285x468x418	162x46.4x430
50	35	50	35	56	35
A	B	A	B	A	A
Hotair	Conv.	Hotair	Conv.	Hot Air	Conv.
0.80	-	0.80	-	0.70	-
0.89	0.79	0.89	0.79	-	0.79
44	46	44	46	46	46
1350		1350		1350	
-		-		-	
4900		4900		4400	
1		1		1	
1		1		1	
2		3		3	
-	-	-	-	-	-
HEZ333000		HEZ333000		HEZ333000	

Compact appliances technical diagrams

Steam ovens, compact ovens with integrated microwave, microwave combination ovens

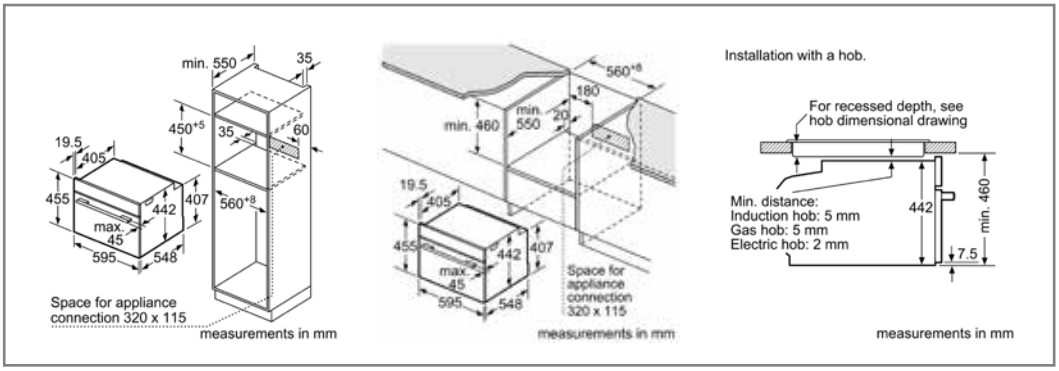

Steam ovens CBG675BS1B | CSG656BS1B | CDG634BS1 | CNG6764S1B | CMG656B.1B | CMG633BS1B

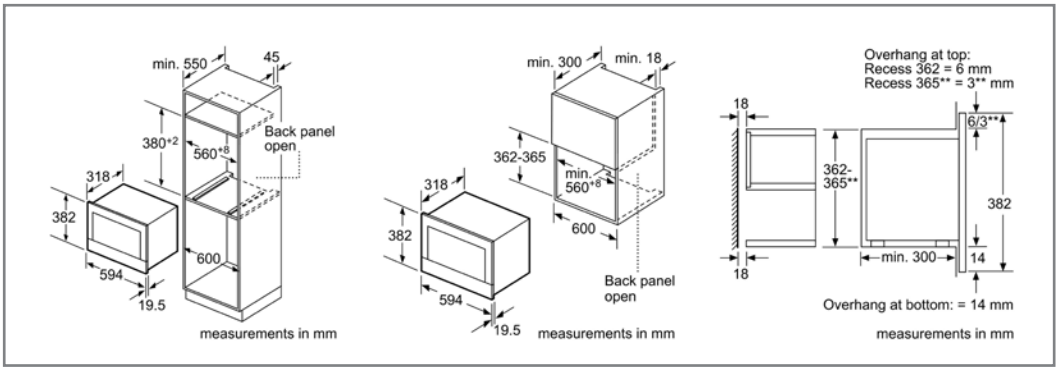

Microwaves BEL634GS1B | BFL634G.1B

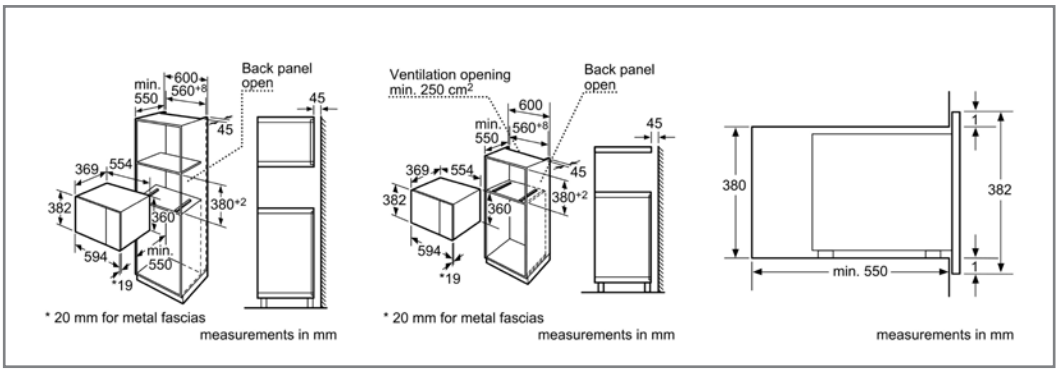

Microwaves HMT84M6.4B

We try to keep up to date with constant technological improvements, so from time to time we may update installation guidelines. Therefore we strongly recommend that you download the latest installation guidelines from www.bosch-home.co.uk. Line drawings are for guidance only, and we recommend that you refer to the latest installation guidelines. Though every care is taken to ensure instructions are correct at the time of printing, Bosch cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

Compact appliances technical diagrams

Steam ovens, compact ovens with integrated microwave, microwave combination ovens

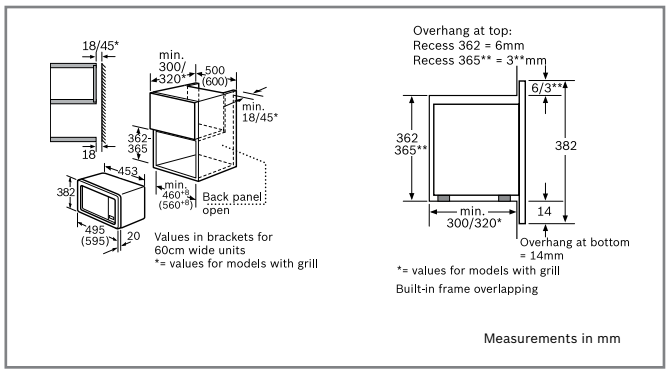

HMT75M551B

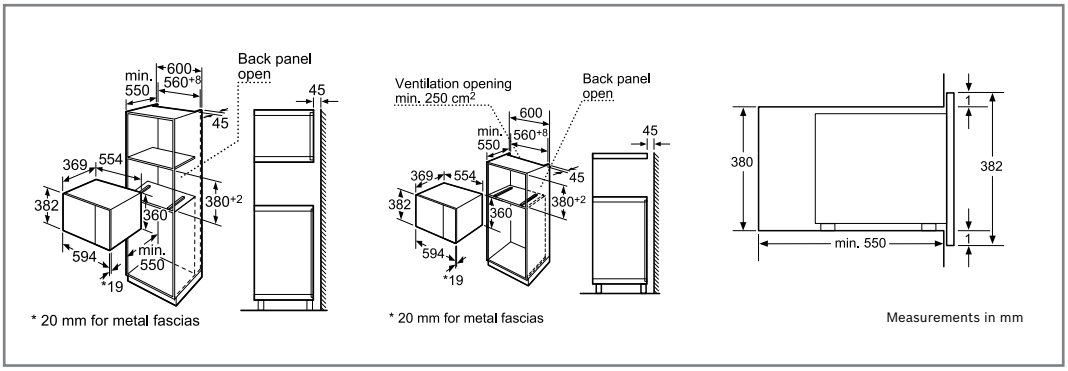

HMT84G654

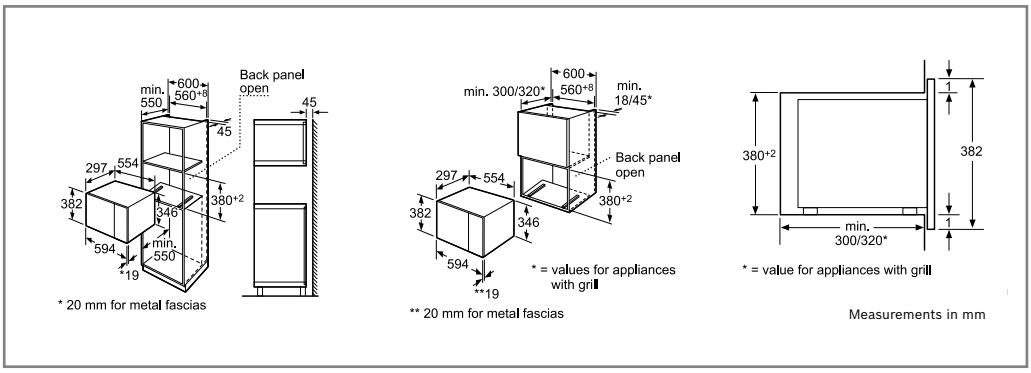

HMT75M6.4B

We try to keep up to date with constant technological improvements, so from time to time we may update installation guidelines. Therefore we strongly recommend that you download the latest installation guidelines from www.bosch-home.co.uk. Line drawings are for guidance only, and we recommend that you refer to the latest installation guidelines. Though every care is taken to ensure instructions are correct at the time of printing, Bosch cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

Compact appliances technical diagrams

Steam ovens, compact ovens with integrated microwave, microwave combination ovens

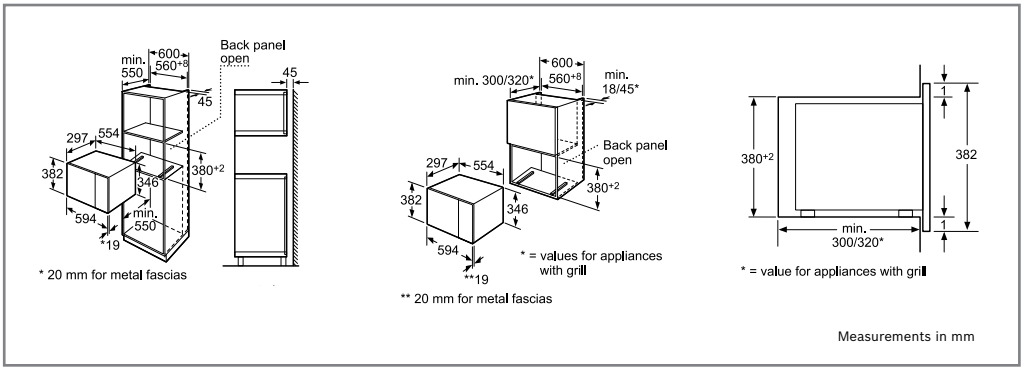

HMT75G654B

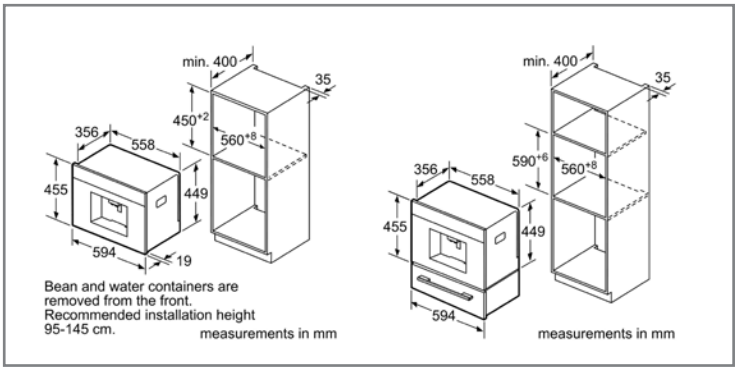

Coffee maker CTL636ES1

We try to keep up to date with constant technological improvements, so from time to time we may update installation guidelines. Therefore we strongly recommend that you download the latest installation guidelines from www.bosch-home.co.uk. Line drawings are for guidance only, and we recommend that you refer to the latest installation guidelines. Though every care is taken to ensure instructions are correct at the time of printing, Bosch cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

Compact appliances technical diagrams

Steam ovens, compact ovens with integrated microwave, microwave combination ovens

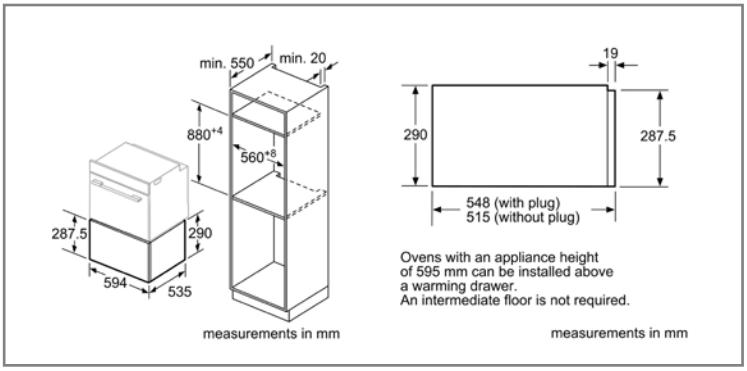

Warming drawers BID630NS1 installed with 60cm high single oven.

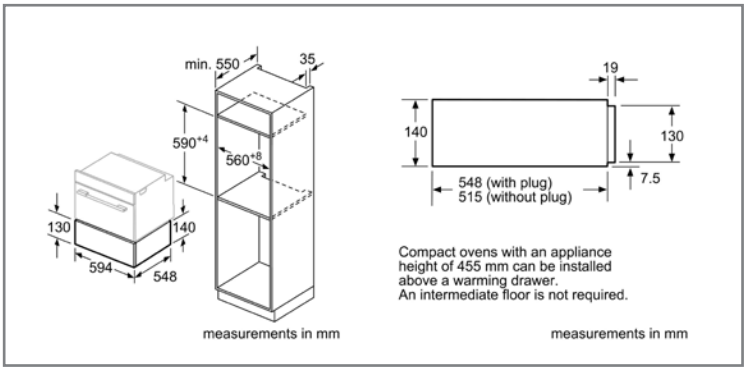

Warming drawers BIC630NS1B installed with 45cm high compact oven.

We try to keep up to date with constant technological improvements, so from time to time we may update installation guidelines. Therefore we strongly recommend that you download the latest installation guidelines from www.bosch-home.co.uk. Line drawings are for guidance only, and we recommend that you refer to the latest installation guidelines. Though every care is taken to ensure instructions are correct at the time of printing, Bosch cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

Compact ovens

	Serie 8		
Oven type	**Pyrolytic**	**Pyrolytic with Microwave**	**With Microwave**
Brushed steel	**CBG675BS1B**	**CMG656BS1B**	**CMG633BS1B**
Black	**-**	**CMG656BB1B**	**-**
KEY FEATURES			
3 TFT colour and graphics displays with direct text touch	-	●	-
1 TFT colour and text display with touch buttons	●	-	●
SoftClose/SoftOpen drop down door	●/●	●/●	●/●
Digital temperature display with proposal	●	●	●
Actual temperature display	●	●	●
Heating up / residual heat indicator	●/●	●/●	●/●
Sabbath setting	●	●	●
Pyrolytic self cleaning function	●	-	-
Pyrolytic proof tray/holder & baking tray	●	-	-
ecoClean® back/roof/side surfaces	-/-/-	●/●/●	-/-/-
EcoClean® cleaning programme	-	●	-
BoschAssist	-	●	-
Perfect Roast Multi-point temperature probe	-	-	-
PerfectBake Sensor	-	-	-
Automatic cooking programmes	10	-	14
DESIGN			
Control panel height mm	96	96	96
Control wheel	●	●	●
Push buttons or keys	-	-	-
Steel handle fixing blocks	●	●	●
Black handle fixing blocks	-	-	-
FEATURES			
Electronic clock timer with automatic on/off programmer	White	White	White
Main on/off switch	●	●	●
Interior lights	1 x Halogen	1 x LED	1 x LED
Light on/off when oven door opened/closed	●	●	●
Automatic safety switch off	●	●	●
Control panel lock	●	●	●
Start button	●	●	●
Water tank empty indicator	-	-	-
Enamelled oven interior	●	●	●
Number of shelf positions	3	3	3
Retractable control dial(s)	-	-	-
Fixed Controls	-	-	-
Full glass inner door	●	●	●
PROGRAMMES / FUNCTIONS			
4D Hot Air	●	●	●
HotairEco	●	●	●
Conventional top & bottom heat	●	●	-
Conventional heat eco	●	●	-
Hot air grilling	●	●	●
Full width variable grill	●	●	●
Half width variable grill	●	●	●
Pizza Setting	●	●	-
Bottom heat	●	●	-
Intensive heating	-	-	-
Low temperature cooking	●	●	-
Defrost	●	-	-
Preheating	●	●	●
Plate warming	●	●	-
Dehydrate	-	-	-
Microwave	-	●	●
Microwave Combined with HotAir, Top&Bottom Heat, HotAIr Grilling, Grill	-	90/180/360W	-
Microwave Combined with HotAir	-	-	90W
Microwave Combined with HotAir Grilling	-	-	90/180/360W
Added steam function	-	-	-
Steam descaling & cleaning	-	-	-
fhdhCavity drying function	-	-	-
Steam reheating and dough proving functions	-	-	-
Fast heat	●	●	●
PERFORMANCE / TECHNICAL SPECIFICATIONS			
Cavity dimensions (HxWxD in mm)	237x480x415	237x480x392	237x480x392
Oven capacity (L)[1]	47	45	45
Installation in tall housing / under work surface	●	●	●
Maximum Microwave Power in W	-	1000	1000
Number of Microwave Power levels	-	5	5
Water tank capacity (L)	-	1	1
Energy efficiency rating 1	A+	-	-
Efficiency declared on	HotAir	-	-
Energy consumption hot air (kWh)	0.61	-	-
Energy consumption conventional (kWh)	0.73	-	-
Time to cook standard load (mins.)	46	-	-
Largest baking sheet area (in cm1)	1290	1290	1290
Cable length (in cm)	120	120	120
Total connected loading (W)	3000	3650	3650
STANDARD ACCESSORIES			
Full width enamelled pan	1	1	1
Wire pan insert	-	-	-
Wire shelves	1	2	1
Extendible telescopic shelves	-	-	-
OPTIONAL ACCESSORIES			
Baking sheet	HEZ631070	HEZ631070	HEZ631070
Fully extendible telescopic shelf rail (1 level)	HEZ638178	-	-
Wire shelf	HEZ634000	-	-

● = Yes
- = No

Compact steam ovens

	Serie 8	
Oven type	**Steam Combination Oven**	**Steam Combination Oven**
Brushed steel	**CSG656BS1B**	**CDG634BS1**
KEY FEATURES		
3 TFT colour and graphics displays with direct text touch	●	-
1 TFT colour and text display with touch buttons	-	●
SoftClose/SoftOpen drop down door	●/●	●/●
Digital temperature display with proposal	●	●
Actual temperature display	●	●
Heating up / residual heat indicator	●/●	●/●
Sabbath setting	●	-
ecoClean® back/roof/side surfaces	●/●/●	-/-/-
EcoClean® cleaning programme	●	-
BoschAssist	●	-
Automatic cooking programmes	-	20
DESIGN		
Control panel height mm	96	96
Control wheel	●	●
Steel handle fixing blocks	●	●
FEATURES		
Electronic clock timer with automatic on/off programmer	White	White
Main on/off switch	●	●
Interior lights	1 x LED	1 x standard
Light on/off when oven door opened/closed	●	●
Automatic safety switch off	●	●
Control panel lock	●	●
Start button	●	●
Water tank empty indicator	●	●
Enamelled oven interior / Stainless steel oven interior	●/-	-/●
Number of shelf positions	3	4
Full glass inner door	●	●
PROGRAMMES / FUNCTIONS		
4D Hot Air	●	-
HotairEco	●	-
Conventional top & bottom heat	●	-
Conventional heat eco	●	-
Hot air grilling	●	-
Full width variable grill	●	-
Half width variable grill	●	-
Pizza Setting	●	-
Bottom heat	●	-
Low temperature cooking	●	-
100% steam	●	●
Added Steam option for HotAir, Top&Bottom Heat, HotAIr Grilling	●	-
Steam reheating	●	●
Steam dough proving	●	●
Defrost	●	●
Preheating	●	-
Warming	●	-
Steam descaling & cleaning	●	●
Cavity drying function	●	●
Fast heat	●	●
PERFORMANCE / TECHNICAL SPECIFICATIONS		
Cavity dimensions (HxWxD in mm)	237x480x415	265x325x439
Oven capacity (L)[1]	47	38
Installation in tall housing / under work surface	●	●
Water tank capacity (L)	1.0	1.3
Energy efficiency rating 1	A+	-
Efficiency declared on	HotAir	-
Energy consumption hot air (kWh)	0.61	-
Energy consumption conventional (kWh)	0.79	-
Time to cook standard load (mins.)	42	-
Largest baking sheet area (in cm1)	1290	1290
Cable length (in cm)	120	120
Total connected loading (W)	3300	1900
STANDARD ACCESSORIES		
Full width enamelled pan	1	-
Wire shelves	1	-
Small perforated steam tray	1	-
Small solid steam tray	1	-
Large perforated steam tray	1	1
Large solid steam tray	-	1
OPTIONAL ACCESSORIES		
Baking sheet	HEZ631070	-

● = Yes
- = No

Microwave ovens

	Serie 8		Serie 6				
Oven type	**Microwave with grill**	**Microwave**	**Microwave with grill**	**Microwave**	**Microwave with grill**	**Microwave**	**Microwave**
Stainless steel	**BEL634GS1B**	**BFL634GS1B**	**HMT84G654B**	**HMT84M654B**	**HMT75G654B**	**HMT75M654B**	**HMT75M551B**
Black	**-**	**BFL634GB1B**	**-**	**HMT84M664B**	**-**	**HMT75M664B**	**-**
White	**-**	**-**	**-**	**HMT84M624B**	**-**	**HMT75M624B**	**-**
KEY FEATURES							
1 TFT colour and text display with touch buttons	●	●	-	-	-	-	-
DESIGN							
Control wheel	●	●	-	-	-	-	-
Control dials with with metal cap	-	-	-	-	-	-	-
Control Dials standard	-	-	●	●	●	●	●
Touch control	●	●	-	-	-	-	-
Push buttons	-	-	●	●	●	●	●
Left hinged door	●	●	●	●	●	●	●
FEATURES							
Electronic clock timer	●	●	●	●	●	●	●
Retractable control dial(s)	-	-	1	1	1	1	1
Interior lights	1 x LED	1 x LED	1 standard	1 standard	1 standard	1 standard	1 x standard
Stainless steel interior	●	●	●	●	●	●	●
Quartz grill	●	-	●	-	●	-	-
PROGRAMMES / FUNCTIONS							
Microwave	●	●	●	●	●	●	●
Microwave and Grill Combination operation	●	-	●	-	-	-	-
Automatic programmes	10	7	8	7	8	7	7
Programmable steps	-	-	-	-	-	-	-
Memory function	-	-	1	1	1	1	1
PERFORMANCE / TECHNICAL SPECIFICATIONS							
Useable oven capacity (L)	21	21	25	25	20	20	17
Cavity dimensions (HxWxD in mm)	220x350x270	220x350x270	208x328x369	208x328x369	221x308x298	221x308x298	194x290x285
Installation in tall housing	●	●	●	●	●	●	-
Installation 60cm wide wall unit	●	●	-	-	●	●	-
Installation 50cm wide wall unit	-	-	-	-	-	-	●
Microwave distribution	Stirrer	Stirrer	Turntable	Turntable	Turntable	Turntable	Turntable
Turntable diameter (mm)	-	-	315	315	245	245	245
Maximum microwave power (W)	900	900	900	900	800	800	800
Number of microwave power levels	5	5	5	5	5	5	5
Total connected laoding (W)	1990	1220	1450	1450	1270	1270	1270
Cable length (in cm)	150	150	130	130	130	130	130
GB plug	●	●	●	●	●	●	●
STANDARD ACCESSORIES							
Glass pan	1	1	-	-	-	-	-
Enamelled pan	-	-	-	-	-	-	-
Wire rack	1	1	-	-	-	-	-
Turntable	-	-	1	1	1	1	1

● = Yes
- = No

Compact coffee maker

	Serie 8
Stainless steel	**CTL636ES1**
KEY FEATURES	
3 TFT colour and graphics displays with direct text touch	●
Left hinged door to access interior	●
Electronic control	●
SensoFlow System	●
Aroma pressure system	●
Auto Valve System	●
DESIGN	
Control panel height mm	96
Control wheel	●
FEATURES	
Main on/off switch	●
Bean container / Ground coffee container	●/●
Container empty warning indicators for water / beans	●/●
Cleaning / descaling / filter warning indicators	●/●/●
Ceramic coffee grinders	●
Multilevel grinding setting	●
Cup illumination	●
Height adjustable coffee outlet (mm)	7-15
Height adjustable milk nozzle (mm)	7-15
Removable, insulated milk container	●
Removable water tank	●
Adjustable automatic switch off setting	●
Integrated water filter	●
Removable spillage collection tray	●
Removable used coffee grounds collection container	●
PROGRAMMES / FUNCTIONS	
Personalised milk beverage	1 or 2 cup
Milk foam	1 or 2 cup
Hot water	1 or 2 cup
Warm milk	1 or 2 cup
Ristretto	1 or 2 cup
Coffee	1 or 2 cup
Espresso	1 or 2 cup
Cappuccino	1 or 2 cup
Latte Macchiato	1 or 2 cup
Caffe latte	1 or 2 cup
Espresso Macchiato	1 or 2 cup
One touch function for milk drinks	●
Coffee temperature options	3
Hot water temperature options	4
Milk foam/frothing function	●/●
Hot Milk function	●
Cleaning / descaling / combined programmes	●/●/●
Automatic rinse when switched on/off	●/●
PERFORMANCE / TECHNICAL SPECIFICATIONS	
Recommended installation height (mm)	950-1450
Installation in a tall housing	●
Insulated Milk container capacity (L)	0.5
Brewing chamber volume (g)	8-12
Bean container	500
Ground coffee container	●
Water tank capacity (L)	2.4
Total connected laoding (W)	1600
Cable length (in cm)	170
GB plug	●

● = Yes
- = No

Warming and storage drawers

		Serie 8	
Stainless steel		**BID630NS1B**	**BIC630NS1B**
KEY FEATURES			
Electronic control		●	●
Soft close mechanism		●	●
DESIGN			
Install independently		●	●
Install with compact appliance		-	●
Install with a single oven		●	●
Push-Pull opening mechanism		●	●
FEATURES			
Operating indicator light		●	●
Rotary temperature control dial		●	●
Number of settings		4	4
Maximum temperature	℃	80	80
Minimum temperature	℃	40	40
Toughened glass drawer base		●	●
Maximum loading	plates	40	12
Maximum loading	espresso cups	192	64
Maximum weight capacity	kg	25	25
PERFORMANCE / TECHNICAL INFORMATION			
Drawer interior volume	L	52	20
Interior drawer dimensions	mm	468x242x458	468x92x458
Installation in a tall housing		●	●
Installation under work surface		●	●
Nominal voltage	V	220-240	220-240
Total connected loading	W	810	810
Cable length	cm	150	150
GB plug		●	●
Appliance weight	kg	21	16
Safety Approved		●	●

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

Freestanding microwave specifications

Brushed steel		**HMT75M451B**	**HMT75G451B**	**HMT72M450B**	**HMT72G450B**	**HMT84M451B**
Black		**HMT75M461B**	-	-	-	**HMT84M461B**
White		**HMT75M421B**	-	-	-	**HMT84M421B**
KEY FEATURES						
Electronic controls		●	●	-	-	●
DESIGN						
Colour co-ordinated controls		●	●	●	●	●
Left hinged door		●	●	●	●	●
Door open button		●	●	●	●	●
FEATURES						
Electronic clock		●	●	-	-	●
Push button controls		●	●	-	-	●
Retractable controls		●	●	-	-	●
Rotary controls		-	-	●	●	-
99 minute timer		●	●	-	-	●
60 minute timer		-	-	●	●	-
Interior light		●	●	●	●	●
Glass turntable		●	●	●	●	●
Stainless steel interior		-	●	-	-	-
Lacquered interior		●	-	●	●	●
PROGRAMMES/FUNCTIONS						
Microwave		●	●	●	●	●
Quartz grill		-	●	-	●	-
Microwave combination cooking		-	●	-	●	-
Weight automatic programmes		7	8	-	-	7
Microwave/grill combination programmes		-	3	-	2	-
Memory function		●	●	-	-	●
PERFORMANCE/TECHNICAL						
Oven capacity	L	17	17	17	17	25
Oven interior dimensions (HxWxD)	mm	194x290x274	194x290x274	194x290x274	194x290x274	215x337x354
Can be installed under a wall unit		●	-	●	-	-
Microwave distribution		Turntable	Turntable	Turntable	Turntable	Turntable
Turntable diameter	mm	245	245	245	245	315
Microwave power levels		5	5	5	5	5
Maximum microwave power level	watts	800	800	800	800	900
Grill power	watts	-	1000	-	1000	-
Cable length	cm	130	130	130	130	130
GB plug		●	●	●	●	●
Total connected load	watts	1270	1270	1270	1270	1450
Voltage	volts	230	230	230	230	230
CE/VDE approved		●	●	●	●	●
Appliance weight	kg	13.6	13.6	13.6	13.6	17.0
Weight including packaging		15.0	15.0	15.0	15.0	19.0
STANDARD ACCESSORIES						
Wire grid		-	1	-	1	-

● = Yes
- = No

Electric hobs technical diagrams

Induction, Quick Therm and domino hobs



Induction all models



Induction all models



PIZ975N17E



PIP875N17E



PIV675N17E



PIN675N17E



PIE975N14E



PIM875N14E



PIM851F17E



PIL811F17E



PIE675N14E



PIN651F17E | PIE651F17E



PIE611B17E



PIA611F18E



PIA611B68B



PKN811D17E

We try to keep up to date with constant technological improvements, so from time to time we may update installation guidelines. Therefore we strongly recommend that you download the latest installation guidelines from www.bosch-home.co.uk. Line drawings are for guidance only, and we recommend that you refer to the latest installation guidelines. Though every care is taken to ensure instructions are correct at the time of printing, Bosch cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

Electric hobs technical diagrams

Induction, Quick Therm and domino hobs



PKE611D17E



PKF659C17E



PKE611C17E



NCT61.C01







We try to keep up to date with constant technological improvements, so from time to time we may update installation guidelines. Therefore we strongly recommend that you download the latest installation guidelines from www.bosch-home.co.uk. Line drawings are for guidance only, and we recommend that you refer to the latest installation guidelines. Though every care is taken to ensure instructions are correct at the time of printing, Bosch cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

Domino combination possibilities with corresponding device and cutout dimensions

Width type:	30	40	60	70	80	90
Device width:	306	396	606	710	816	916

			A	B	C	D	L	X
2x30,			306	306	–	–	612	**576**
1x30,	1x40		306	396	–	–	702	**666**
1x30,	1x60		306	606	–	–	912	**876**
1x30,	1x70		306	710	–	–	1016	**980**
1x30,	1x80		306	816	–	–	1122	**1086**
1x30,	1x90		306	916	–	–	1222	**1186**
2x40			396	396	–	–	792	**756**
1x40,	1x60		396	606	–	–	1002	**966**
1x40,	1x70		396	710	–	–	1106	**1070**
1x40,	1x80		396	816	–	–	1212	**1176**
1x40,	1x90		396	916	–	–	1312	**1276**
3x30			306	306	306	–	918	**882**
2x30,	1x40		306	306	396	–	1008	**972**
2x30,	1x60		306	306	606	–	1218	**1182**
2x30,	1x70		306	306	710	–	1322	**1286**
2x30,	1x80		306	306	816	–	1428	**1392**
2x30,	1x90		306	306	916	–	1528	**1492**
1x30,	2x40		306	396	396	–	1098	**1062**
1x30,	1x40,	1x60	306	396	606	–	1308	**1272**
1x30,	1x40,	1x70	306	396	710	–	1412	**1376**
1x30,	1x40,	1x80	306	396	816	–	1518	**1482**
1x30,	1x40,	1x90	306	396	916	–	1618	**1582**
2x40,	1x60		396	396	606	–	1398	**1362**
4x30			306	306	306	306	1224	**1188**
3x30,	1x40		306	306	306	396	1314	**1278**

Electric hobs specifications

	FLEXINDUCTION								INDUCTION					
	Serie 8								Serie 6		Serie 8			
Black glass, brushed steel trim	**PIZ975N17E**		**PIP875N17E**		**PIV675N17E**		**PIN675N17E**		**PIN651F17E**		**PIE975N14E**		**PIM875N14E**	
Black glass														
KEY FEATURES														
Electronic control	●		●		●		●		●		●		●	
DirectSelect operation	DirectSelect Plus		DirectSelect Plus		DirectSelect Plus		DirectSelect Plus		DirectSelect Plus		DirectSelect Plus		DirectSelect Plus	
Electronic power level display	●		●		●		●		●		●		●	
Safety cut-out switch off	●		●		●		●		●		●		●	
Control panel lock	●		●		●		●		●		●		●	
Boost setting	●		●		●		●		●		●		●	
QuickStart function	-		-		-		-		●		-		-	
ReStart function	-		-		-		-		●		-		-	
Energy Consumption Display	-		-		-		-		●		-		-	
Automatic pan recognition	●		●		●		●		●		●		●	
Connection Current Management	-		-		-		-		-		-		-	
DESIGN														
Hob width (mm)	916		816		606		606		592		916		816	
Front controls	●		●		●		●		●		●		●	
Touch control	●		●		●		●		●		●		●	
Metal control dials	-		-		-		-		-		-		-	
Can be installed with a Bosch domino hob	●		●		●		●		-		●		●	
All around trim	●		●		●		●		-		●		●	
Three sided bevelled frameless finish	-		-		-		-		●		-		-	
Frameless	-		-		-		-		-		-		-	
FEATURES														
Number of power levels	17		17		17		17		17		17		17	
Main on/off switch	●		●		●		●		●		●		●	
Timer for all zones	●		●		●		●		●		●		●	
Residual heat indicators	Hh		Hh		Hh		Hh		Hh		Hh		Hh	
Freeze function	●		●		●		●		●		●		-	
Small utensil detection	●		●		●		●		-		●		●	
PERFORMANCE / TECHNICAL INFORMATION														
Number of cooking zones	5		5		4		4		4		4		5	
Number of FlexInduction cooking zones	4		1		2		1		1		-		-	
Triple ring induction zone	●		-		-		-		-		-		-	
Number of dual / extendible zones	-		-		-		-		-		-		-	
Left zone FlexInduction connected (max. kW/Area mm)	3.3	380x200	-	-	3.3	400x240	3.3	400x240	3.7	240x400	-	-	-	-
Left front zone max. power & diameter (kW & mm)	-	-	2.2	180	-	-	-	-	-	-	1.8	180	1.8	180
Left back zone max. power & diameter (kW & mm)	-	-	1.4	145	-	-	-	-	3.8	200x240	1.8	180	1.4	145
Centre zones FlexInduction connected (max. kW/Area mm)	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Centre zone max. power & diameter (kW & mm)	3.3, 2.2, 2.6	320, 260, 210	2.2	240	-	-	-	-	-	-	-	-	2.2	240
Centre front zone max. power & diameter (kW & mm)	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Centre back zone max. power & diameter (kW & mm)	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Right zone FlexInduction connected (max.kW/Area mm)	3.3	380x200	3.6	380x200	3.3	400x240	-	-	-	-	-	-	-	-
Right front zone max. power & diameter (kW & mm)	-	-	-	-	-	-	2.2	210	-	-	2.2	210	2.2	210
Right back zone max. power & diameter (kW & mm)	-	-	-	-	-	-	1.4	145	1.8	145	1.4	145	1.4	145
Nominal voltage (V)	220-240		220-240		220-240		220-240		220-240		220-240		220-240	
Maxiumum power output (W)	10800		7200		7200		7200		7200		7200		7200	
Cable length (in cm)	110		110		110		110		110		110		110	
13A UK plug	-		-		-		-		-		-		-	
Appliance weight (kg)	20.0		16.0		14.0		12.0		11.9		12.0		14.0	
Safety Approved	●		●		●		●		●		●		●	
OPTIONAL ACCESSORIES														
Connecting strip	HEZ394301		HEZ394301		HEZ394301		HEZ394301		-		HEZ394301		HEZ394301	
Set of four pans	HEZ390042		HEZ390042		HEZ390042		HEZ390042		HEZ390042		HEZ390042		HEZ390042	

● = Yes

- = No

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

															DOMINO
Serie 6				Serie 8		Serie 6		Serie 4		Serie 6		Serie 4		Serie 2	
				PIE675N14E										PIE375C14E	
PIM851F17E		PIL811F17E				PIE651F17E		PIE611B17E		PIA611F18E		PIA611B68B			
●		●		●		●		●		●		●		●	
DirectSelect		DirectSelect		DirectSelect Plus		DirectSelect		-		DirectSelect		-		-	
●		●		●		●		●		●		●		●	
●		●		●		●		●		●		●		●	
●		●		●		●		-		●		-		-	
●		●		●		●		●		●		●		●	
●		●		-		●		●		●		●		-	
●		●		-		●		●		●		●		-	
●		●		-		●		-		●		-		-	
●		●		●		●		●		●		●		●	
-		-		-		-		-		●		●		-	
802		802		606		592		592		592		592		306	
●		●		●		●		●		●		●		●	
●		●		●		●		●		●		●		-	
-		-		-		-		-		-		-		●	
●		●		●		●		●		●		●		●	
-		-		●		-		-		-		-		●	
●		-		-		●		-		-		-		-	
-		●		-		-		●		●		●		-	
17		17		17		17		17		17		17		9	
●		●		●		●		●		●		●		●	
●		●		●		●		●		●		●		-	
Hh		Hh		Hh		Hh		Hh		Hh		Hh		Hh	
-		-		●		-		-						-	
●		●		●		●		●		●		●		●	
5		4		4		4		4		4		4		2	
-		-		-		-		-		-		-		-	
-		-		-		-		-		-		-		-	
-		-		-		-		-		-		-		-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.8	180	2.2	210	1.8	180	1.8	180	1.8	180	1.4	145	1.4	145	-	-
1.4	145	1.4	145	1.8	180	1.8	180	1.8	180	1.8	180	1.8	180	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2.2	240	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.3	210
-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.8	145
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2.2	210	1.4	145	2.2	210	2.2	210	2.2	210	1.8	180	1.8	180	-	-
1.4	145	2.4	280	1.4	145	1.4	145	1.4	145	1.4	145	1.4	145	-	-
220-240		220-240		220-240		220-240		220-240		220-240		220-240		220-240	
7200		7200		7200		7200		7200		4600		2990		3600	
110		110		110		110		110		110		110		110	
-		-		-		-		-		-		●		-	
14.0		14.0		12.0		11.0		11.0		11.0		10.0		10.0	
●		●		●		●		●		●		●		●	
-		-		HEZ394301		-		-		-		-		HEZ394301	
HEZ390042		HEZ390042		HEZ390042		HEZ390042		HEZ390042		HEZ390042		HEZ390042		-	

Electric hobs specifications

		QUICK-THERM										SEALED PLATE		DOMINO	
		Serie 4				Serie 2									
Black Glass, Brushed steel trim		-		-		-		-		-		-		**PKF375V14E**	
White Glass		-		-		**PKF659C17E**		-		-		-		-	
Black Glass		**PKN811D17E**		**PKE611D17E**		-		**PKE611C17E**		-		-		-	
Brushed steel		-		-		-		-		-		**NCT615C01**		-	
White		-		-		-		-		-		**NCT612C01**		-	
Black		-		-		-		-		-		**NCT616C01**		-	
KEY FEATURES															
Electronic control		●		●		-		-		-		-		-	
Electronic power level display		●		●		-		-		-		-		-	
Safety cut-out switch off		●		●		-		-		-		-		-	
DESIGN															
Hob width (mm)		802		592		592		592		580				306	
Side controls		-		-		●		●		●				-	
Front controls		●		●		-		-		-				●	
Touch control		●		●		-		-		-				-	
Metal control dials		-		-		-		-		-				●	
Standard controls - steel coloured		-		-		●		-		-				-	
Standard controls - colour coordinated		-		-		-		●		●				-	
Profile trim (Front Facette with side trim)		-		-		●		-		-				●	
Can be installed with a Bosch domino hob		●		●		●		●		-				●	
Frameless		●		●		-		●		-				-	
FEATURES															
Number of power levels		17		17		9		9		9				9	
Main on/off switch		●		●		-		-		-				●	
Power on indicator		●		●		-		-		-				-	
Residual heat indicators		Hh		Hh		Hh		Hh		-				Hh	
PERFORMANCE / TECHNICAL INFORMATION															
Number of cooking zones		4		4		4		4		4				2	
Number of dual / extendible zones		2		-		1		-		-				1	
Left front zone power & diameter	kW & mm	2	180	1.2	145	1.2	145	1.2	145	2.0	180			-	-
Left back zone power & diameter	kW & mm	1.8, 2.6	170, 265	2	180	0.75, 2.2	120, 210	2.2	210	1.5	145			-	-
Centre front zone power & diameter	kW & mm	-	-	-	-	-	-	-	-	-	-			0.8-2.0	120-180
Centre back zone power & diameter	kW & mm	-	-	-	-	-	-	-	-	-	-			1.2	145
Right front zone power & diameter	kW & mm	0.75, 2.2	120, 210	2.2	210	2	180	2	180	1.5	145			-	-
Right back zone power & diameter	kW & mm	1.2	145	1.2	145	1.2	145	1.2	145	2.0	180			-	-
Nominal voltage	V	220-240		220-240		220-240		220-240		220-240				220-240	
Total connected electrical load	W	7500		6600		6600		6600		7000				3200	
Cable length	cm	-		-		-		-		100				100	
Appliance weight	kg	11.0		7.0		8.0		8.0		11.0				4.7	
Safety Approved		●		●		●		●		●				●	
OPTIONAL ACCESSORIES															
Connecting strip		-		-		-		-		-				HEZ394301	

● = Yes

- = No

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

Gas hobs technical diagrams

Standard and domino gas hobs



PPS816M91E



PPS916B91E



PPP616M91E



PCR715M90E | PCQ715B90E



PCH615M90E | PCP61.B90E



PCR915B91E



PCS815B90E



PPQ716B91E



PPP616B91E



PCP615B90E | PCP61.B90E



POP6B6B80



PBH6B5B60



PBP6B.B60

We try to keep up to date with constant technological improvements, so from time to time we may update installation guidelines. Therefore we strongly recommend that you download the latest installation guidelines from www.bosch-home.co.uk. Line drawings are for guidance only, and we recommend that you refer to the latest installation guidelines. Though every care is taken to ensure instructions are correct at the time of printing, Bosch cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

Gas hobs technical diagrams

Standard and domino gas hobs



PRA326B70E



PRB326B70E



PIE375C14E



PKF375V14E



We try to keep up to date with constant technological improvements, so from time to time we may update installation guidelines. Therefore we strongly recommend that you download the latest installation guidelines from www.bosch-home.co.uk. Line drawings are for guidance only, and we recommend that you refer to the latest installation guidelines. Though every care is taken to ensure instructions are correct at the time of printing, Bosch cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

Gas hobs technical diagrams

Standard and domino gas hobs

Domino combination possibilities with corresponding device and cutout dimensions

Width type:	30	40	60	70	80	90
Device width:	306	396	606	710	816	916

			A	B	C	D	L	X
2x30,			306	306	–	–	612	**576**
1x30,	1x40		306	396	–	–	702	**666**
1x30,	1x60		306	606	–	–	912	**876**
1x30,	1x70		306	710	–	–	1016	**980**
1x30,	1x80		306	816	–	–	1122	**1086**
1x30,	1x90		306	916	–	–	1222	**1186**
2x40			396	396	–	–	792	**756**
1x40,	1x60		396	606	–	–	1002	**966**
1x40,	1x70		396	710	–	–	1106	**1070**
1x40,	1x80		396	816	–	–	1212	**1176**
1x40,	1x90		396	916	–	–	1312	**1276**
3x30			306	306	306	–	918	**882**
2x30,	1x40		306	306	396	–	1008	**972**
2x30,	1x60		306	306	606	–	1218	**1182**
2x30,	1x70		306	306	710	–	1322	**1286**
2x30,	1x80		306	306	816	–	1428	**1392**
2x30,	1x90		306	306	916	–	1528	**1492**
1x30,	2x40		306	396	396	–	1098	**1062**
1x30,	1x40,	1x60	306	396	606	–	1308	**1272**
1x30,	1x40,	1x70	306	396	710	–	1412	**1376**
1x30,	1x40,	1x80	306	396	816	–	1518	**1482**
1x30,	1x40,	1x90	306	396	916	–	1618	**1582**
2x40,	1x60		396	396	606	–	1398	**1362**
4x30			306	306	306	306	1224	**1188**
3x30,	1x40		306	306	306	396	1314	**1278**

Gas hobs specifications

		Serie 6										
Stainless steel / Stainless steel trim		-	-	-	**PCR715M90E**	**PCH615M90E**	-	-	**PCR915B91E**	**PCS815B90E**	**PCQ715B90E**	**PCP615B90B**
Black/Premium black		**PPS816M91E**	**PPS916B91E**	**PPP616M91E**	-	-	**PPQ716B91E**	**PPP616B91E**	-	-	-	**PCP616B90E**
White/Premium white		-	-		-	-	-	-	-	-	-	**PCP612B90E**
KEY FEATURES												
Number of wok style burners		1	1	-	1	1	1	-	1	1	1	-
Dual control wok burner		-	-	-	●	-	-	-	-	●	-	-
Quick-Stop Main Switch		●	●	●	●	●	-	-	-	-	-	-
DESIGN												
Hob width (mm)		752	915	590	702	582	710	590	915	762	702	582
Side controls		-	-	-	-	-	-	-	-	-	-	-
Front controls		●	●	●	●	●	●	●	●	●	●	●
Ceramic glass base		●	●	-	-	-	-	-	-	-	-	-
Design trim (Front Facette with steel finish side trim)		-	-	-	-	-	-	-	-	-	-	-
Tempered glass base		●	●	●	-	-	●	●	-	-	-	-
Metal/Steel base		-	-	-	●	●	-	-	●	●	●	●
Surface / Flush Fitting Installation		●/●	●/●	●/●	●/-	●/-	●/●	●/●	●/-	●/-	●/-	●/-
FEATURES												
Variable power levels		●	●	●	●	●	●	●	●	●	●	●
Ignition via control dials		●	●	●	●	●	●	●	●	●	●	●
Flame failure safety device		●	●	●	●	●	●	●	●	●	●	●
Cast iron pan supports	number	5	5	4	2	2	5	4	3	3	2	2
Enamelled pan supports	number	-	-	-	-	-	-	-	-	-	-	-
Low profile single piece burners		-	-	-	-	-	-	-	-	-	-	-
Two piece burners		●	●	●	●	●	●	●	●	●	●	●
PERFORMANCE / TECHNICAL INFORMATION												
Number of cooking zones		5	5	4	5	4	5	4	5	5	5	4
Left burner power	kW	4.0	4.0	-	-	-	-	-	-	5.0	-	-
Front left zone power	kW	-	-	1.7	1.0	3.3	1.0	1.7	3.0	-	1.0	1.7
Back zone left power	kW	-	-	1.7	1.7	1.7	1.7	1.7	1.0	-	1.7	1.7
Centre/Centre front zone power	kW	1.0	1.0	-	5.0	-	4.0	-	4.5	1.0	4.0	-
Centre back zone power	kW	1.7	1.7	-	-	-	-	-	-	1.7	-	-
Front right zone power	kW	1.7	1.7	1.0	1.7	1.0	1.7	1.0	1.7	1.7	1.7	1.0
Back right zone power	kW	3.0	3.0	3.0	3.0	3.0	3.0	3.0	1.7	3.0	3.0	3.0
Pre-set for natural gas		●	●	●	●	●	●	●	●	●	●	●
Nominal voltage	V	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Maximum gas power output load	W	11400	11400	7400	12400	9000	11400	7400	11900	12400	12400	7400
Total connected electrical load	W	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Cable length	cm	100	100	100	100	100	100	100	150	100	100	100
GB plug		-	-	-	-	-	-	-	-	-	-	-
Appliance weight	kg	18.1	18.1	13.1	14.0	10.8	18.1	13.1	16.3	13.8	14.0	9.7
Safety Approved		●	●	●	●	●	●	●	●	●	●	●
STANDARD ACCESSORY												
LPG jets		28-30/37mbar	28-30/37mbar	28-30/37mbar	28-30/37mbar	28-30/37mbar	28-30/37mbar	28-30/37mbar	28-30/37mbar	28-30/37mbar	28-30/37mbar	28-30/37mbar
OPTIONAL ACCESSORIES												
Connecting Strip		-	-	-	-	-	-	-	-	-	-	-

● = Yes
- = No

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

DOMINO GAS HOBS

Serie 2			Serie 8	
-	PBH6B5B60	PBP6B5B60	PRB326B70E	PRA326B70E
POP6B6B80	-	PBP6B6B60	-	-
-	-	PBP6B2B60	-	-
-	1	-	-	1
-	-	-	-	●
-	-	-	-	-
590	580	580	306	306
●	●	●	-	-
-	-	-	●	●
-	-	-	●	●
-	-	-	●	●
●	-	-	-	-
-	●	●	-	-
●/-	●/-	●/-	●/-	●/-
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
-	2	2	1	1
2	-	-	-	-
-	-	-	●	-
●	●	●	-	-
4	4	4	2	1
-	-	-	-	-
3.0	3.3	3.0	-	-
1.7	1.7	1.7	-	-
-	-	-	1.9	6.0
-	-	-	2.8	-
1.0	1.0	1.0	-	-
1.7	1.7	1.7	-	-
●	●	●	●	●
220-240	220-240	220-240	220-240	220-240
7400	7700	7400	4700	6000
0.6	0.6	0.6	0.6	0.6
100	100	100	100	100
-	-	-	-	-
11.3	10.0	9.5	7.0	8.6
●	●	●	●	●
28-30/37mbar	28-30/37mbar	28-30/37mbar	28-30/37mbar	28-30/37mbar
-	-	-	HEZ394301	HEZ394301

Hoods technical diagrams

Chimney hoods

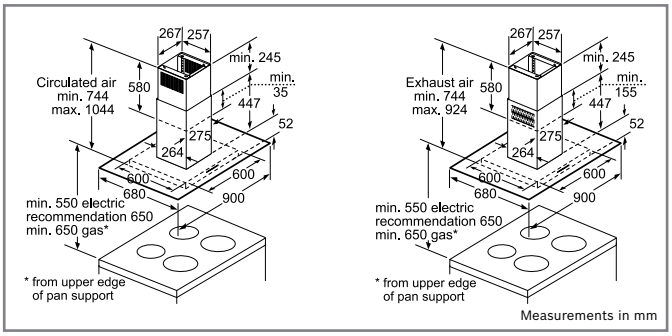

DIA098E50B

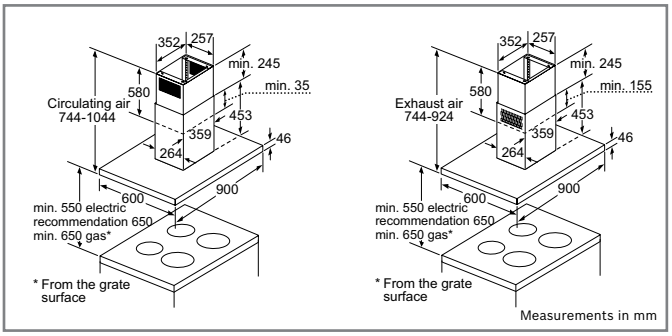

DIB091K50B



DIB091U51B



DWK068G61B



DWK098G61B



DWK098E51B



DWA097E51B



DWA067E51B



DWA078E50B



DWA094W51B



DWA064W51B



DWA094W50B



DWA074W50B



DWA064W50B

We try to keep up to date with constant technological improvements, so from time to time we may update installation guidelines. Therefore we strongly recommend that you download the latest installation guidelines from www.bosch-home.co.uk. Line drawings are for guidance only, and we recommend that you refer to the latest installation guidelines. Though every care is taken to ensure instructions are correct at the time of printing, Bosch cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

Hoods technical diagrams

Chimney hoods



DWB098E51B



DWB098J50B



DWB097A50B



DWB067A50B



DWB068J50B



DWB09W452B



DWB06W452B



DWB094W50B



DWB074W50B



DWB064W50B



DWW097A50B



DWW077A50B



DWW067A50B



DWW09W460B



DWW09W450B



DWW07W450B

We try to keep up to date with constant technological improvements, so from time to time we may update installation guidelines. Therefore we strongly recommend that you download the latest installation guidelines from www.bosch-home.co.uk. Line drawings are for guidance only, and we recommend that you refer to the latest installation guidelines. Though every care is taken to ensure instructions are correct at the time of printing, Bosch cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

Hoods technical diagrams

Chimney hoods



DWW06W460B



DWW06W450B

Telescopic, canopy, integrated and conventional hoods



DHI635HGB



DHE635BGB | DHE645MGB



DHU632PGB



DHL535BGB



DHL555BGB



DHL575CGB



DHL785CGB

We try to keep up to date with constant technological improvements, so from time to time we may update installation guidelines. Therefore we strongly recommend that you download the latest installation guidelines from www.bosch-home.co.uk. Line drawings are for guidance only, and we recommend that you refer to the latest installation guidelines. Though every care is taken to ensure instructions are correct at the time of printing, Bosch cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

Hoods specifications

	ISLAND			ANGLED				BOX CHIMNEY		CHIMNEY	
	Serie 8		Serie 6	Serie 8		Serie 6		Serie 8		Serie 6	
Brushed steel or grey glass	-	DIB091U51B	DIA098E50B	-	-	DWK098E51B	DWA097E51B	-	-	DWA067E51B	DWA078E50B
Stainless steel	DIB091K50B	-	-	-	-	-	-	DWB098J50B	DWB068J50B	-	-
Black or black glass	-	-	-	DWK098G61B	DWK068G61B	-	-	-	-	-	-
White or white glass	-	-	-	-	-	-	-	-		-	-
Black lacquered	-	-	-	-	-	-	-	-	-	-	-
Silver metallic lacquered	-	-	-	-	-	-	-	-	-	-	-
KEY FEATURES	-			-	-			-	-		
Electronic control	●	●	●	●	●	●	●	●	●	●	●
Electronic power level display	-	●	●	●	●	●	●	-	-	●	●
Rim ventilation	●	-	-	●	●	-	-	-	-	-	-
Grease filter saturation indicator	●	-	-	●	●	-	-	-	-	-	-
Charcoal filter saturation indicator	●	-	-	●	●	-	-	-	-	-	-
DESIGN	-			-	-			-	-		
Appliance width (mm)	900	900	900	900	600	900	900	900	600	600	600
Wall mounted installation	-	-	-	●	●	●	●	●	●	●	●
Ceiling mounted installation	●	●	●	-	-	-	-	-	-	-	-
Install in, between or under furniture carcase	-	-	-	-	-	-	-	-	-	-	-
Height adjustable chimney sections	●	●	●	●	●	●	●	●	●	●	●
Canopy/Box height (mm)	-	46	52	-	-	387	57	-	-	57	52
Adjustable vapour screen	-	-	-	-	-	-	-	-	-	-	-
Variable control position	-	-	-	-	-	-	-	-	-	-	-
Steel finish profile/handle	-	-	-	-	-	-	-	-	-	-	-
Glass canopy	-	-	●	●	●	●	●	-	-	●	●
FEATURES	-			-	-			-	-		
Metal touch control	-	-	-	-	-	-	-	-	-		
Soft touch metal button control	-	●	●	-	-	●	●	-	-	●	●
Push button control	-	-	-	-	-	-	-	-	-	-	-
Rocker switch control	-	-	-	-	-	-	-	-	-	-	-
Slider switch control	-	-	-	-	-	-	-	-	-	-	-
Touch Control	●	-	-	●	●	-	-	●	●	-	-
LED, Low-lift pushbuttons	-	-	-	-	-	-	-	-	-	-	-
Power levels	3	3	3	4	4	3	3	3	3	3	3
Intensive setting	2	●	●	1	1	●	●	2	2	●	●
Automatic intensive revert	●	●	●	●	●	●	●	●	●	●	●
1W LED	-	-	-	2		-	-	2	2	-	-
15W LED light strips	-	-	-	-	-	-	-	-	-	-	-
3W low energy LED light	4	4	4	-	2	2	2	-	-	2	2
20W low energy halogen lights	-	-	-	-	-	-	-	-	-	-	-
25W halogen spotlights	-	-	-	-	-	-	-	-	-	-	-
28W halogen bulbs	-	-	-	-	-	-	-	-	-	-	-
40W bulbs	-	-	-	-	-	-	-	-	-	-	-
Softlight with dimmer function	●	-	-	-	-	-	-	●	●	-	-
Fluorescent mood lighting	●	-	-	●	●	-	-	●	●	-	-
Automatic after running (mins.)	10	1-9	-	15	15	10	10	10	10	10	10
Additional noise reduction insulation	●	●	-	-	-	-	-	●	-	-	-
Double filter system	-	-	-	-	-	-	-	-	-	-	-
Steel filter cover	●	-	-	-		-	-			-	-
Steel filter cover solid (rim ventilation)	-	-	-	-	-	-	-	-	-	-	-
Cosmetic steel filter cover	-	-	-	-	-	-	-	-	-	-	-
Number of metal grease filter cassettes	3	3	2	3	3	2	1	3	2	1	1
Paper grease filter	-	-	-	-	-	-	-	-	-	-	-
PERFORMANCE / TECHNICAL INFORMATION	-			-	-			-	-		
Easy installation system	-	-	-	-	-	●	●	-	-	●	●
Suitable for ducted operation	●	●	●	●	●	●	●	●	●	●	●
Suitable for recirculating operation	●	●	●	●	●	●	●	●	●	●	●
Extraction rate in m^3/h [1,2]	-			-	-			-	-		
- ducted / recirculating at power level 1	250 / 190	290 / 190	260 / 170	190 / 210	190 / 210	220 / 170	230 / 150	300 / 170	250 / 170	230 / 150	230 / 150
- ducted / recirculating at power level 2	430 / 340	460 / 350	370 / 250	390 / 290	390 / 290	340 / 260	340 / 240	380 / 290	360 / 260	340 / 240	340 / 240
- ducted / recirculating at power level 3	620 / 390	640 / 400	450 / 290	480 / 350	480 / 350	420 / 310	440 / 300	460 / 350	430 / 300	440 / 300	440 / 300
- ducted / recirculating, intensive setting	850	1010 / 480	800 / 360	850	850	740 / 380	680 / 360	860	760	680 / 360	680 / 360
Max noise level (sound pressure) based on dBA re 20 µPa [1,3]	-			-	-			-	-		
- ducted / recirculating at power level 1	26/43	28 / 43	29 / 45	27/44	27/44	31 / 45	31 / 42	32/43	31/46	31 / 42	31 / 42
- ducted / recirculating at power level 2	40/54	39 / 53	40 / 53	43/52	43/52	39 / 54	39 / 51	36/51	41/54	40 / 51	40 / 51
- ducted / recirculating at power level 3	48/57	47 / 57	45 / 56	48/56	48/56	44 / 56	45 / 55	41/54	46/57	45 / 56	45 / 56
- ducted / recirculating, intensive setting	55/61	54 / 60	55 / 61	59/63	59/63	54 / 61	51 / 57	54/59	58/61	50 / 58	50 / 58
Noise level (sound power) based on dB(A) re 1 pW [1,4]	-			-	-			-	-		
- ducted / recirculating at power level 1	40/57	42 / 57	43 / 59	41/58	41/58	45 / 59	45 / 56	46/57	45/60	45 / 56	45 / 56
- ducted / recirculating at power level 2	54/68	53 / 67	54 / 67	57/66	57/66	53 / 68	53 / 65	50/65	55/68	54 / 65	54 / 65
- ducted / recirculating at power level 3	62/71	61 / 71	59 / 67	62/70	62/70	58 / 70	59 / 69	55/68	60/71	59 / 70	59 / 70
- ducted / recirculating, intensive setting	69/75	70 / 75	71 / 74	73/77	73/77	70 / 75	68 / 73	68/73	72/75	69 / 73	69 / 73
Pipe outlet diameter (mm)	120 / 150	120 / 150	120 / 150	150 / 120	120 / 150	120 / 150	120 / 150	120 / 150	150 / 120	150 / 120	150 / 120
Min. distance above an electric hob (mm)	-	550	550	-	-	400	550	-	-	550	550
Min. distance above a gas hob pan support (mm)	-	650	650	-	-	500	650	-	-	650	650
Motor power (W)	260	260	160	270	270	160	130	160	160	130	130
Total electrical loading (W)	272	272	172	272	272	166	136	169	166	136	136
Nominal Voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Power cable length (cm)	130	130	130	130	130	130	130	130	130	130	130
GB plug	●	●	●	●	●	●	●	●	●	●	●
Appliance weight (kg)	40.0	30	35	31.0	31.0	27	19	26.0	21.0	17	18
Safety approved	●	●	●	●	●	●	●	●	●	●	●
OPTIONAL ACCESSORIES	-			-	-			-	-		
900x720mm stainless steel back panel	-	-	-	-	-	-	-	-	-	-	-
700x720mm stainless steel back panel	-	-	-	-	-	-	-	-	-	-	-
600x720mm stainless steel back panel	-	-	-	-	-	-	-	-	-	-	-
Steel finish profile/handle - solid	-	-	-	-	-	-	-	-	-	-	-
Steel finish profile/handle with control opening	-	-	-	-	-	-	-	-	-	-	-
Paper grease filters	-	-	-	-	-	-	-	-	-	-	-
Recirculating kit (needed if recirculating)	DHZ5385	DHZ5385	DHZ5365	DHZ5335	DHZ5335	DHZ5325	DHZ5325	DHZ5345	DHZ5325	DHZ5325	DHZ5325
Charcoal odour filter (needed if recirculating)	-	-	-	-	-	-	-	-	-	-	-
Décor panel white	-	-	-	-	-	-	-	-	-	-	-
Décor panel black	-	-	-	-	-	-	-	-	-	-	-

● = Yes

- = No

[1] Air flow and noise declarations made in line with CECED Code Of Conduct

[2] Measured according to EN61591 on largest pipe diameter

[3] Sound pressure measured according to EN60704-2-13 on largest pipe diameter

[4] Sound power measured according to EN60704-3 on largest pipe diameter

[5]Recirculating kit for Black glass model only

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

Hoods specifications

	CHIMNEY									BOX	
	Serie 4		Serie 2							Serie 6	Serie 4
Brushed steel or grey glass	**DWW077A50B**	**DWW067A50B**	**DWB09W452B**	**DWB06W452B**	**DWA094W51B**	**DWA064W51B**	**DWA094W50B**	**DWA074W50B**	**DWA064W50B**	**DWB098E51B**	**DWW097A50B**
Stainless steel	-	-	-	-	-	-	-	-	-	-	-
Black or black glass	-	-	-	-	-	-	-	-	-	-	-
White or white glass	-	-	-	-	-	-	-	-	-	-	-
Black lacquered	-	-	-	-	-	-	-	-	-	-	-
Silver metallic lacquered	-	-	-	-	-	-	-	-	-	-	-
KEY FEATURES											
Electronic control	●	●	-	-	-	-	-	-	-	●	●
Electronic power level display	●	●	-	-	-	-	-	-	-	●	●
Rim ventilation	-	-	-	-	-	-	-	-	-	-	-
Grease filter saturation indicator	-	-	-	-	-	-	-	-	-	-	-
Charcoal filter saturation indicator	-	-	-	-	-	-	-	-	-	-	-
DESIGN											
Appliance width (mm)	700	600	900	600	900	600	900	700	600	900	900
Wall mounted installation	●	●	●	●	●	●	●	●	●	●	●
Ceiling mounted installation	-	-	-	-	-	-	-	-	-	-	-
Install in, between or under furniture carcase	-	-	-	-	-	-	-	-	-	-	-
Height adjustable chimney sections	●	●	●	●	●	●	●	●	●	●	●
Canopy/Box height (mm)	90	90	60	60	57	57	52	52	52	46	90
Adjustable vapour screen	-	-	-	-	-	-	-	-	-	-	-
Variable control position	-	-	-	-	-	-	-	-	-	-	-
Steel finish profile/handle	-	-	-	-	-	-	-	-	-	-	-
Glass canopy	-	-	-	-	●	●	●	●	●	-	-
FEATURES											
Metal touch control	-	-	-	-						-	-
Soft touch metal button control	●	●	-	-	-	-	-	-	-	●	●
Push button control	-	-	-	-	-	-	-	-	-	-	-
Rocker switch control	-	-	●	●	●	●	●	●	●	-	-
Slider switch control	-	-	-	-	-	-	-	-	-	-	-
Touch Control	-	-	-	-	-	-	-	-	-	-	-
LED, Low-lift pushbuttons	-	-	-	-	-	-	-	-	-	-	-
Power levels	3	3	3	3	3	3	3	3	3	3	3
Intensive setting	●	●	-	-	-	-	-	-	-	●	●
Automatic intensive revert	●	●	-	-	-	-	-	-	-	●	●
1W LED	-	-	-	-	-	-	-	-	-	-	-
15W LED light strips	-	-	-	-	-	-	-	-	-	-	-
3W low energy LED light	2	2	-	-	-	-	-	-	-	3	3
20W low energy halogen lights	-	-	-	-	2	2	2	2	2	-	-
25W halogen spotlights	-	-	-	-	-	-	-	-	-	-	-
28W halogen bulbs	-	-	2	2	-	-	-	-	-	-	-
40W bulbs	-	-	-	-	-	-	-	-	-	-	-
Softlight with dimmer function	-	-	-	-	-	-	-	-	-	-	-
Fluorescent mood lighting	-	-	-	-	-	-	-	-	-	-	-
Automatic after running (mins.)		-	-	-	-	-	-	-	-	10	-
Additional noise reduction insulation	-	-	-	-	-	-	-	-	-	●	●
Double filter system	-	-	-	-	-	-	-	-	-	-	-
Steel filter cover	-	-	-	-	-	-	-	-	-	-	-
Steel filter cover solid (rim ventilation)	-	-	-	-	-	-	-	-	-	-	-
Cosmetic steel filter cover	-	-	-	-	-	-	-	-	-	-	-
Number of metal grease filter cassettes	2	2	3	2	1	1	1	1	1	3	3
Paper grease filter	-	-	-	-	-	-	-	-	-	-	-
PERFORMANCE / TECHNICAL INFORMATION											
Easy installation system	●	●	-	-	●	●	●	●	●	●	●
Suitable for ducted operation	●	●	●	●	●	●	●	●	●	●	●
Suitable for recirculating operation	●	●	●	●	●	●	●	●	●	●	●
Extraction rate in m^3/h [1,2]											
- ducted / recirculating at power level 1	240 / 150	240 / 150	260 / 170	260 / 170	200 / 130	200 / 130	200 / 130	200 / 130	200 / 130	260 / 180	250 / 160
- ducted / recirculating at power level 2	350 / 240	350 / 240	360 / 240	360 / 240	300 / 200	300 / 200	300 / 200	300 / 200	300 / 200	380 / 300	360 / 280
- ducted / recirculating at power level 3	440 / 300	440 / 300	450 / 300	450 / 300	450 / 290	450 / 290	450 / 290	450 / 290	450 / 290	460 / 360	460 / 350
- ducted / recirculating, intensive setting	690 / 360	690 / 360	- / -	- / -	- / -	- / -	- / -	- / -	- / -	860 / 460	730 / 430
Max noise level (sound pressure) based on dBA re 20 µPa [1,3]											
- ducted / recirculating at power level 1	31 / 42	31 / 42	38 / 45	38 / 45	33 / 39	33 / 40	33 / 39	33 / 40	33 / 40	29 / 43	29 / 40
- ducted / recirculating at power level 2	39 / 51	39 / 51	44 / 51	44 / 51	39 / 49	39 / 50	39 / 49	39 / 50	39 / 50	36 / 51	34 / 49
- ducted / recirculating at power level 3	44 / 55	44 / 55	48 / 55	48 / 55	48 / -	48 / 57	48 / 56	48 / 57	48 / 57	41 / 54	40 / 54
- ducted / recirculating, intensive setting	54 / 59	54 / 59	- / -	- / -	- / -	- / -	- / -	- / -	- / -	49 / 59	50 / 58
Noise level (sound power) based on dB(A) re 1 pW [1,4]											
- ducted / recirculating at power level 1	45 / 56	45 / 56	52 / 59	52 / 59	47 / 53	47 / 54	47 / 53	47 / 54	47 / 54	43 / 57	43 / 54
- ducted / recirculating at power level 2	53 / 65	53 / 65	58 / 65	58 / 65	53 / 63	53 / 64	53 / 63	53 / 64	53 / 64	50 / 65	48 / 63
- ducted / recirculating at power level 3	58 / 69	58 / 69	63 / 69	63 / 69	62 / 70	62 / 71	62 / 70	62 / 71	62 / 71	55 / 68	54 / 68
- ducted / recirculating, intensive setting	68 / 73	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	68 / 73	64 / 72
Pipe outlet diameter (mm)	120 / 150	120 / 150	150 / 120	150 / 120	120 / 150	120 / 150	150 / 120	150 / 120	150 / 120	120 / 150	150 / 120
Min. distance above an electric hob (mm)	550	550	550	550	550	550	550	550	550	550	550
Min. distance above a gas hob pan support (mm)	650	650	650	650	650	650	650	650	650	650	650
Motor power (W)	130	130	100	100	130	130	130	130	130	160	130
Total electrical loading (W)	136	136	160	160	170	170	170	170	170	169	139
Nominal Voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Power cable length (cm)	130	130	130	130	130	130	130	130	130	130	130
GB plug	●	●	●	●	●	●	●	●	●	●	●
Appliance weight (kg)	14	15	13	12	19	17	19	16	17	22	20
Safety approved	●	●	●	●	●	●	●	●	●	●	●
OPTIONAL ACCESSORIES											
900x720mm stainless steel back panel	-	-	DHZ9551	-	-	-	-	-	-	-	-
700x720mm stainless steel back panel	-	-	-	-	-	-	-	-	-	-	-
600x720mm stainless steel back panel	-	-	-	DHZ6551	-	-	-	-	-	-	-
Steel finish profile/handle - solid	-	-	-	-	-	-	-	-	-	-	-
Steel finish profile/handle with control opening	-	-	-	-	-	-	-	-	-	-	-
Paper grease filters	-	-	-	-	-	-	-	-	-	-	-
Recirculating kit (needed if recirculating)	DHZ5325	DHZ5325	DHZ5325	DHZ5325	DHZ5325	DHZ5325	DHZ5325	DHZ5325	DHZ5325	DHZ5345	DHZ5345
Charcoal odour filter (needed if recirculating)	-	-	-	-	-	-	-	-	-	-	-
Décor panel white	-	-	-	-	-	-	-	-	-	-	-
Décor panel black	-	-	-	-	-	-	-	-	-	-	-

● = Yes

- = No

[1] Air flow and noise declarations made in line with CECED Code Of Conduct

[2] Measured according to EN61591 on largest pipe diameter

[3] Sound pressure measured according to EN60704-2-13 on largest pipe diameter

[4] Sound power measured according to EN60704-3 on largest pipe diameter

[5]Recirculating kit for Black glass model only

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

		PYRAMID			PYRAMID					TELESCOPIC	INTEGRATED			
		Serie 2			Serie 2					Serie 4	Serie 2			
DWB097A50B	**DWB067A50B**	**DWB094W50B**	**DWB074W50B**	**DWB064W50B**	-	**DWW09W450B**	**DWW07W450B**	-	**DWW06W450B**				-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	**DHU626MGB**	**DHU645PGB**
-	-	-	-	-	**DWW09W460B**	-	-	**DWW06W460B**	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	**DHI635HGB**	**DHE645MGB**	**DHE635BGB**	-	-
													-	-
●	●	-	-	-	-	-	-	-	-	-	-	-	-	-
●	●	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
													-	-
900	600	900	700	600	900	900	700	600	600	598	598	599	598	600
●	●	●	●	●	●	●	●	●	●	-	●	●	●	●
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	●	-	-	-	●
●	●	●	●	●									-	-
46	46	60	60	60	246	246	246	246	246				-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	●	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
													-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
●	●	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	●	-
-	-	●	●	●	●	●	●	●	●	●	●	●	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	●
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
-	●	-	-	-	-	-	-	-	-	-	-	-	-	-
●	●	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3	2	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	2	2	2	-	-	-	-	-	-	-	-	2	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	2	2	2	2	2	2	2	1	-	1
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	●	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	●	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	●	●		
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3	2	3	2	2	3	3	2	2	2	2	2	1	2	1
-	-	-	-	-	-	-	-	-	-	-	-	●	●	●
													-	-
●	●	●	●	●	-	-	-	-	-	-	-	-	-	-
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
													-	-
250 / 160	240 / 150	210 / 130	210 / 120	210 / 120	230 / 150	230 / 150	230 / 150	230 / 150	230 / 150	250 / 200	170 / 140	140 / 120	110 / 50	160 / 60
360 / 280	350 / 240	320 / 210	310 / 200	310 / 200	290 / 190	290 / 190	290 / 190	290 / 190	290 / 190	310 / 250	250 / 230	190 / 170	140 / 50	210 / 70
460 / 350	440 / 300	470 / 330	460 / 290	460 / 290	400 / 230	400 / 230	400 / 230	400 / 230	400 / 230	400 / 300	360 / 300	280 / 230	270 / 60	240 / 80
730 / 430	690 / 360	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-	-
													-	-
29 / 40	31 / 42	29 / 36	32 / 39	32 / 39	41 / 42	41 / 42	41 / 42	43 / 42	42 / 42	45 / 48	37 / 38	40 / 44	33/47	49/55
34 / 49	39 / 51	35 / 46	39 / 48	39 / 48	46 / 49	46 / 49	46 / 49	48 / 49	47 / 49	49 / 52	45 / 49	46 / 51	38/50	54/58
40 / 54	44 / 55	44 / 55	48 / 56	48 / 56	51 / 53	51 / 53	51 / 53	53 / 53	52 / 53	52 / 66	52 / 54	54 / 56	54/53	57/59
50 / 58	54 / 59	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-	-
													-	-
43 / 54	45 / 56	43 / 50	46 / 53	46 / 53	55 / 56	55 / 56	55 / 56	57 / 56	56 / 56	57 / 60	49 / 50	52 / 56	47/61	63/69
48 / 63	53 / 65	49 / 60	53 / 62	53 / 62	60 / 63	60 / 63	60 / 63	62 / 63	61 / 63	61 / 64	57 / 61	58 / 63	52/64	68/72
54 / 68	58 / 69	58 / 69	62 / 70	62 / 70	65 / 67	65 / 67	65 / 67	67 / 67	66 / 67	64 / 68	64 / 66	66 / 68	68/67	71/73
64 / 72	68 / 73	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-	-
120 / 150	120 / 150	150 / 120	150 / 120	120 / 150	150 / 120	150 / 120	150 / 120	150 / 120	150 / 120	120	120	120	120	100 / 120
550	550	550	550	550	550	550	550	550	550	430	650	650	-	-
650	650	650	650	650	650	650	650	650	650	650	650	650	-	-
130	130	130	130	130	95	95	95	95	95	100	210	130	140	125
139	136	170	170	170	155	155	155	155	155	160	270	160	160	153
220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-230	220-230	220 - 240	220-240
130	130	130	130	130	130	130	130	130	130	130	130	130	130	150
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
20	15	19	14	15	15	10	11	9	8	9	9	7	11.0	10.0
●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
													-	-
-	-	-	-	-	-	DHZ9551	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	DHZ7551	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	DHZ6551	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	DHZ2100	-	-
DHZ5345	DHZ5325	DHZ5345	DHZ5325	DHZ5325	DHZ5275	DHZ5275	DHZ5275	DHZ5275	DHZ5275	-	-	-	DHZ2400	DHZ2701
-	-	-	-	-	-	-	-	-	-	-	DSZ11AF	DSZ11AF	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Hoods specifications

	INTEGRATED		CANOPY			
	Serie 2		Serie 6		Serie 4	Serie 2
Brushed steel or grey glass	-	-	-	-	-	
Stainless steel	-	**DHU642PGB**	**DHL785CGB**	**DHL575CGB**	-	-
Black or black glass	-	-	-	-	-	-
White or white glass	-	-	-	-	-	-
Black lacquered	**DHU646PGB**	-	-	-	-	-
Silver metallic lacquered	-	-	-	-	**DHL555BGB**	**DHL535BGB**
KEY FEATURES	-	-	-	-	-	
Electronic control	-	-	●	●	-	-
Electronic power level display	-	-	●	●	-	-
Rim ventilation	-	-	●	●	-	-
Grease filter saturation indicator	-	-	-	-	-	●
Charcoal filter saturation indicator	-	-	-	-	-	-
DESIGN	-	-	-	-	-	
Appliance width (mm)	600	600	700	520	530	530
Wall mounted installation	●	●	-	-	-	-
Ceiling mounted installation	-	-	-	-	-	-
Install in, between or under furniture carcase	-	-	●	●	●	●
Height adjustable chimney sections	-	-	-	-	-	
Canopy/Box height (mm)	-	-	-	-	-	
Adjustable vapour screen	-	-	-	-	-	-
Variable control position	-	-	-	-	-	-
Steel finish profile/handle	-	-	-	-	-	-
Glass canopy	-	-	-	-	-	-
FEATURES	-	-	-	-	-	
Metal touch control	-	-	-	-	-	-
Soft touch metal button control	-	-	●	-	-	-
Push button control	-	-	-	-	-	-
Rocker switch control	-	-	-	-	-	●
Slider switch control	●	●	-	-	●	-
Touch Control	-	-	-	-	-	-
LED, Low-lift pushbuttons	-	-	●	●	-	-
Power levels	3	3	3	3	3	2
Intensive setting	-	-	1	1	1	-
Automatic intensive revert	-	-	●	●	-	-
1W LED	-	-	2	2	-	-
15W LED light strips	-	-	-	-	-	-
3W low energy LED light	-		-	-	-	-
20W low energy halogen lights	-	-	-	-	2	-
25W halogen spotlights	-	-	-	-	-	-
28W halogen bulbs	1	1	-	-	-	2
40W bulbs	-	-	-	-	-	-
Softlight with dimmer function	-	-	-	-	-	-
Fluorescent mood lighting	-	-	-	-	-	-
Automatic after running (mins.)	-	-	-	-	-	-
Additional noise reduction insulation	-	-	-	-	-	-
Double filter system	-	-	-	-	-	-
Steel filter cover			●	●		-
Steel filter cover solid (rim ventilation)	-	-	-	-	-	-
Cosmetic steel filter cover	-	-	-	-	-	-
Number of metal grease filter cassettes	1	1	2	1	2	1
Paper grease filter	-	-	-	-	-	●
PERFORMANCE / TECHNICAL INFORMATION	-	-	-	-	-	
Easy installation system	-	-	-	-	-	-
Suitable for ducted operation	●	●	●	●	●	●
Suitable for recirculating operation	●	●	●	●	●	●
Extraction rate in m^3/h [1,2]	-	-	-	-	-	
- ducted / recirculating at power level 1	160 / 60	160 / 60	340 / 210	290 / 210	210 / 180	150 / 130
- ducted / recirculating at power level 2	210 / 70	210 / 70	540 / 270	450 / 260	320 / 250	210 / 180
- ducted / recirculating at power level 3	240 / 80	240 / 80	630 / 300	560 / 290	420 / 320	- / -
- ducted / recirculating, intensive setting	-	-	730	610	650	280 / 240
Max noise level (sound pressure) based on dBA re 20 µPa [1,3]	-	-	-	-	-	
- ducted / recirculating at power level 1	49/55	49/55	39/53	36/52	27/38	41 / 41
- ducted / recirculating at power level 2	54/58	54/58	49/57	49/57	38/46	48 / 48
- ducted / recirculating at power level 3	57/59	57/59	52/59	53/60	45/50	- / -
- ducted / recirculating, intensive setting	-	-	55/60	56/61	55/58	54 / 55
Noise level (sound power) based on dB(A) re 1 pW [1,4]	-	-	-	-	-	
- ducted / recirculating at power level 1	63/69	63/69	53/67	50/66	41/52	53 / 53
- ducted / recirculating at power level 2	68/72	68/72	63/71	63/71	52/60	60 / 60
- ducted / recirculating at power level 3	71/73	71/73	66/73	67/74	59/64	-
- ducted / recirculating, intensive setting	-	-	69/74	70/75	69/72	66 / 67
Pipe outlet diameter (mm)	100 / 120	100 / 120	120 / 150	150 / 120	150 / 120	120
Min. distance above an electric hob (mm)	-	-	-	-	-	650
Min. distance above a gas hob pan support (mm)	-	-	-	-	-	650
Motor power (W)	125	125	275	250	200	170
Total electrical loading (W)	153	153	277	252	240	230
Nominal Voltage (V)	220-240	220-240	220 - 240	220 - 240	220 - 240	220-240
Power cable length (cm)	150	150	150	150	130	130
GB plug	●	●	●	●	●	●
Appliance weight (kg)	10.0	10.0	13.0	10.0	9.0	5
Safety approved	●	●	●	●	●	●
OPTIONAL ACCESSORIES	-	-	-	-	-	
900x720mm stainless steel back panel	-	-	-	-	-	-
700x720mm stainless steel back panel	-	-	-	-	-	-
600x720mm stainless steel back panel	-	-	-	-	-	-
Steel finish profile/handle - solid	-	-	-	-	-	-
Steel finish profile/handle with control opening	-	-	-	-	-	-
Paper grease filters	-	-	-	-	-	DHZ2100
Recirculating kit (needed if recirculating)	DHZ2701	DHZ2701	DHZ5605	DHZ5605	DHZ7305	-
Charcoal odour filter (needed if recirculating)	-	-	-	-	-	DHZ7304
Décor panel white	-	-	-	-	-	-
Décor panel black	-	-	-	-	-	-

● = Yes

- = No

[1] Air flow and noise declarations made in line with CECED Code Of Conduct

[2] Measured according to EN61591 on largest pipe diameter

[3] Sound pressure measured according to EN60704-2-13 on largest pipe diameter

[4] Sound power measured according to EN60704-3 on largest pipe diameter

[5]Recirculating kit for Black glass model only

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

Notes

Integrated cooling technical diagrams

Fridge freezers, fridges and freezers

Please refer to the Freestanding Appliances brochure for American-style fridge freezers.

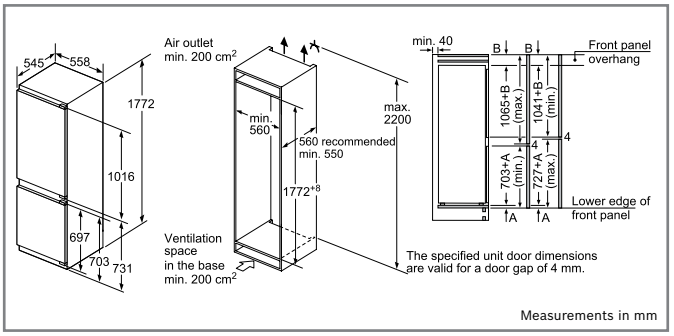

KIN86AD30G

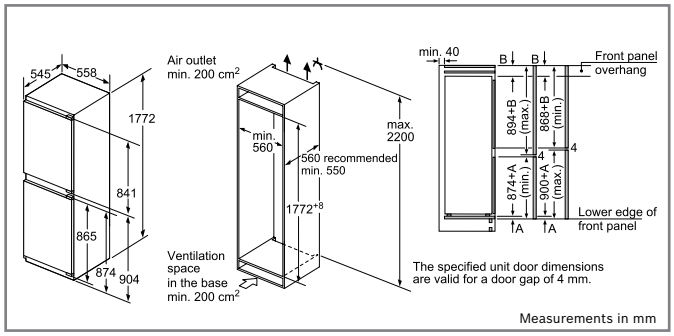

KIN85AF30G

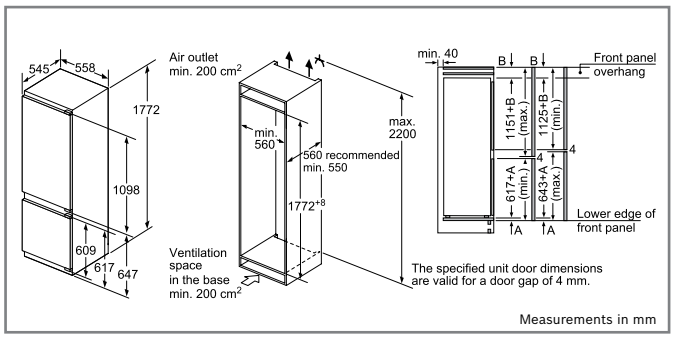

KIS87AF30G

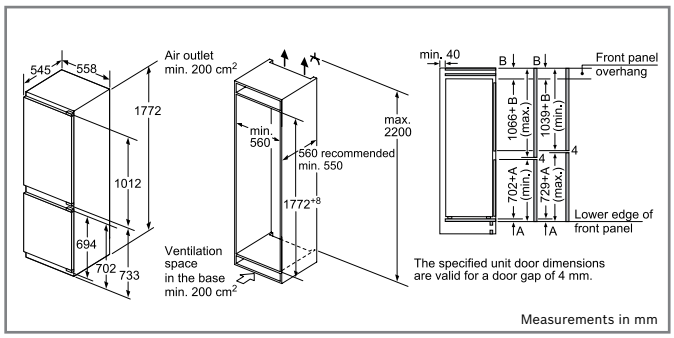

KIS86AF30G / KIN86VF30G

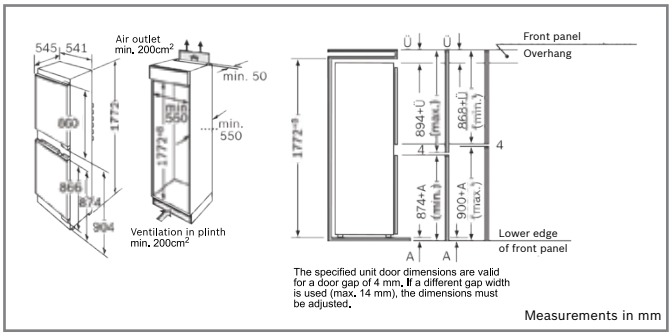

KIV32A50GB

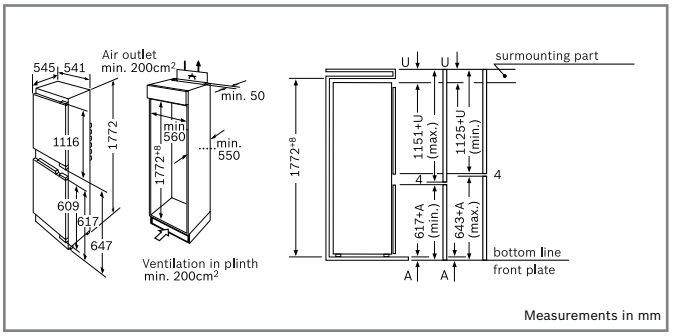

KIV38A51GB

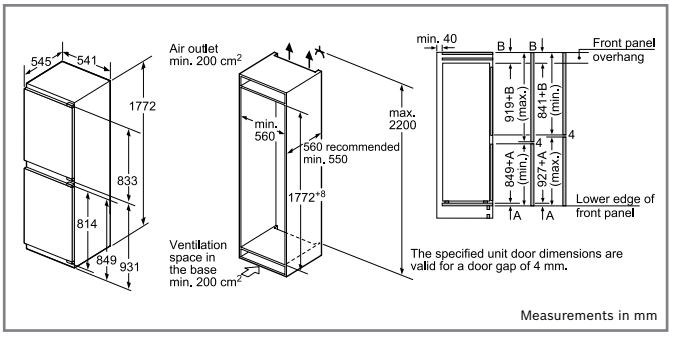

KIV32X22GB

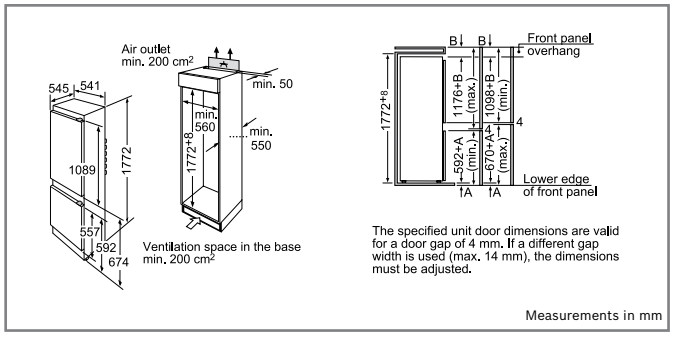

KIV38X22GB

We try to keep up to date with constant technological improvements, so from time to time we may update installation guidelines. Therefore we strongly recommend that you download the latest installation guidelines from www.bosch-home.co.uk. Line drawings are for guidance only, and we recommend that you refer to the latest installation guidelines. Though every care is taken to ensure instructions are correct at the time of printing, Bosch cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

Integrated cooling technical diagrams

Fridge freezers, fridges and freezers

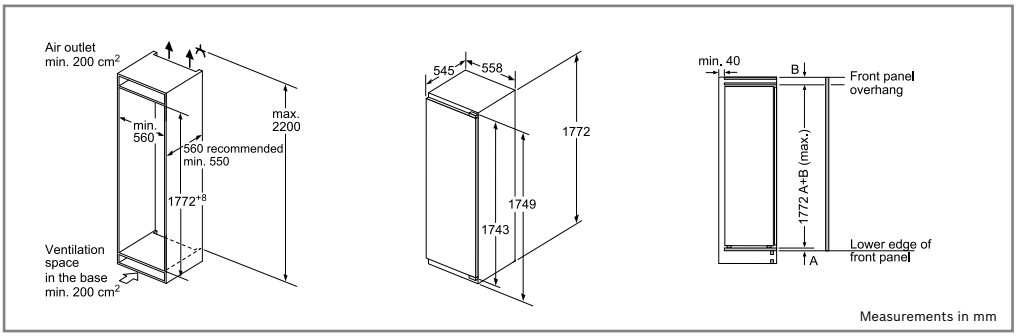

KIR81AF30G

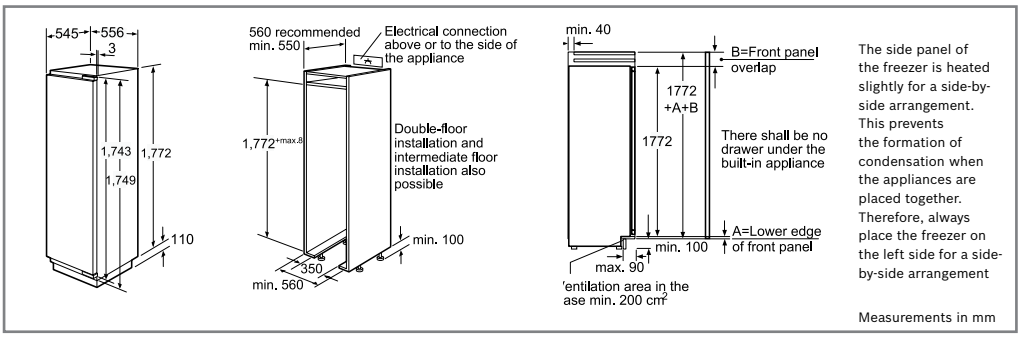

GIN38A55GB

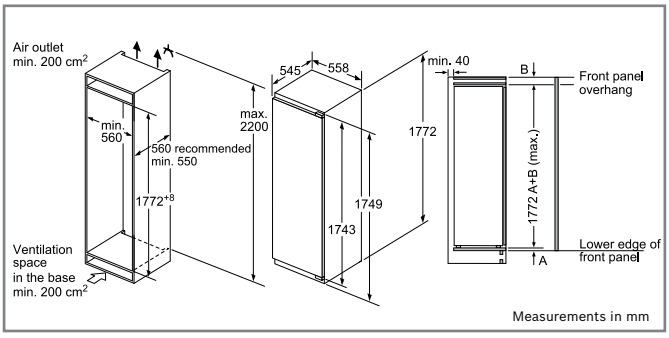

KIL82AF30G



KIR31VS30G



KIR41AF30G | KIR24V20G | KIR41AD30G | KIL42VS30G | KIR41VS30G



KIR21VS30G | KIR21VF30G | KIR21AF30G | GID18A50GB | GID18A20GB | KIR18V20GB



KUR15A50GB | KUL15A60GB | GUD15A50GB

We try to keep up to date with constant technological improvements, so from time to time we may update installation guidelines. Therefore we strongly recommend that you download the latest installation guidelines from www.bosch-home.co.uk. Line drawings are for guidance only, and we recommend that you refer to the latest installation guidelines. Though every care is taken to ensure instructions are correct at the time of printing, Bosch cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

Integrated fridges & freezers specifications

		AMERICAN STYLE			BUILT-IN FRIDGE FREEZERS							
		Exxcel		*Classixx*	**Serie 6**				**Serie 4**			**Serie 2**
Stainless steel look			**KAD62V40GB**	**KAN62V41GB**								
Black		**KAN58A55GB**										
White					**KIN86AD30G**	**KIN85AF30G**	**KIS87AF30G**	**KIS86AF30G**	**KIN86VF30G**	**KIV32A50GB**	**KIV38A51GB**	**KIV32X22GB**
PERFORMANCE AND CONSUMPTION												
Energy efficiency class		A+	A+	A+	A++	A+	A++	A++	A++	A+	A+	A+
Annual energy consumption	kWh	460	455	497	221	232	225	218	222	283	275	283
Total unit net capacity	litres	510	562	604	255	246	270	265	255	257	277	255
Refrigerator net capacity	litres	346	385	385	188	154	209	195	188	165	218	162
Freezer net capacity	litres	164	177	219	67	92	61	74	67	92	58	93
Noise level dB (re 1pW)		45	44	44	39	39	35	35	39	40	40	40
DESIGN FEATURES												
Colour of sides		Black	Chrome inox-metallic	Chrome Inox-metallic	-	-	-	-		-	-	-
Type of handle		Vertical bar handle	Vertical bar handle	Vertical bar handle	-	-	-	-		-	-	-
Door hinge		Left and right	Left and right	Left and right	-	-	-	-		-	-	-
Type of hinge		-	-	-	SoftClose	Flat hinge	Flat hinge	Flat hinge	Flat hinge	Flat hinge	Flat hinge	Sliding hinge
Reversible Door, Hinged on right		-	-	-	●	●	●	●	●	●	●	●
Light Wattage - Refrigerator		-	-	-	-	-		-	-	1x25 Watt	1x25 Watt	1x15 Watt
Light		-	-	-	-	-	-	-	-	-	-	-
LED light		-	-	-	●	●	●	●	-	-	-	-
Number of compressors		1	1	1	1	1	1	1	1	1	1	1
Number of cooling circuits		1	2	2	2	2	2	2	1	1	1	1
Number of evaporators		-	2	2	1	1	1	1	1	1	-	-
Number of temperature zones fridge		-	-	-	-	1	-	1	1	1	1	1
FOOD FRESHNESS SYSTEMS												
Range of temperatures	°C	4-8	4-8	4-8	4-8	4-8	4-8	4-8	4-8	4-8	4-8	4-8
Interior ventilation through plinth		-	-	-	-	●	-	-	-	-	-	-
Humidity control drawer		-	●	-	●	●	●	●	●	●	●	●
Anti Bacterial		-	●	●	-	-	-	-	-	-	-	-
Food preservation containers		CoolBox	CoolBox	CoolBox	HydroFresh	HydroFresh	Crisper Box	Crisper Box	Crisper Box	Crisper Box	Crisper Box	Crisper Box
MultiAirflow system		●	●	●	-	-	-	-	-	-	-	-
KEY FEATURES - FRIDGE SECTION												
No. of temperature zones fridge		1	1	1	1	1	1	1	1	1	1	1
Number of vegetable containers with ribbed bottom and humidity control		-	-	-	-	2	1	1	1	1	1	1
Number of shelves in fridge compartment		-	-	-	5	4	5	5	4	4	5	3
Number of glass safety shelves in fridge compartment		3	4	4	-	-	-	-	-	-	-	-
Number of adjustable shelves in fridge compartment		2	3	3	4	3	4	4	3	3	4	2
Type of shelves		Stationary	Full Extension	Full Extension	-	-	-	-	-	-	-	-
Drawers with telscopic rails		-	Partial Extension	Partial Extension	-	-	-	-	-	-	-	-
Number of door bins in fridge		2	2	2	-	-	-	-	-	-	-	-
Tilt-out door bins in fridge		-	-	-	-	●	-	●	●	●	●	●
Number of door shelves		-	-	-	5	4	5	4	4	4	-	-
Number of containers in fridge compartment		-	-	-	3	2	3	4	-	-	-	-
EasyLift flexible shelf in door		-	●	●	-	-	-	-	-	-	-	-
Fast cooling switch		●	●	●	●	●	●	●	-	-	-	-
Included accessories		-	-	-	-	-	-	-	-	-	-	-
KEY FEATURES - FREEZER SECTION												
Star rating		-	-	-	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★
Number of freezer draws		-	-	-	3	4	2	4	3	4	3	4
NoFrost system		Full	Full	Full	Full	Full	No	No	No	No	No	No
Fast freezing switch		●	●	●	●	●	●	●	●	●	●	-
Shelf adjustability		-	●		-	-	-	-	-	-	-	-
Automatic motor-driven ice-maker		●	●	●	-	-	-	-	-	-	-	-
Water filter replacement indicator		●	-	-	-	-	-	-	-	-	-	-
Water tank		●	●	-	-	-	-	-	-	-	-	-
Dispenser - crushed ice, ice cubes, quick ice, water, water filter		●	●	-	-	-	-	-	-	-	-	-
Included accessories		-	1 x connection hose, 1 egg tray	-	-	2 x ice packs, 1 x butter dish, 2 x egg tray, 1 x ice cube tray	2 x ice packs, 2 x egg gray, 1 x ice cube tray	2 x ice packs, 1 x butter dish, 2 x egg tray, 1 x ice cube tray	2 x ice packs, 2 x egg tray, 1 x ice cube tray	2 x ice packs, 1 x butter dish, 2 x egg tray, 1 x ice cube tray	2 x ice packs, 1 x butter dish, 2 x egg tray, 1 x ice cube tray	1 x butter dish
FUNCTIONS												
Electronic display		2 x LED display	2 x LED display	2 x LED display	-	-	-	-	-	-	-	-
Temperature display fridge		-	-	-	-	LED display	LED display	LED display	LED display	LED display	LED display	-
Warning / malfunction signal		Visual and audible	Visual and audible	Visual and audible	Warning signal door open	Visual	-	-	-	-	-	-
Door opened indicator		-	-	-	●	●	●	●	●	-	-	-
DIMENSION AND INSTALLATION												
Climate class		SN-T	SN-T	SN-T	SN-ST	SN-ST	SN-T	SN-ST	SN-ST	SN-ST	SN-ST	ST
Height of the product	mm	1800	1756	1756	1772	1772	1772	1772	1772	1772	1772	1772
Width of the product	mm	900	910	910	556	538	556	541	538	541	541	541
Depth of the product		674	725	725	545	533	545	545	542	545	545	545
Width with opened door 90°	mm	-	-	-	600	600	600	600	600	600	600	600
Depth with open door 90°	mm	1144	1158	1158	1140	1140	1140	1140	1140	1140	1140	1140
Maximum height for installation	mm	-	-	-	-	-	-	-	-	-	-	-
Maximum width for installation	mm	-	-	-	-	-	-	-	-	-	-	-
Depth for installation	mm	-	-	-	-	-	-	-	-	-	-	-
Maximum adjustability feet	mm	-	-	-	-	-	-	-	-	-	-	-

● = Yes
- = No

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

	BUILT-IN FRIDGES AND FREEZERS						BUILT-UNDER FRIDGES/FREEZERS					
	Serie 8	Serie 6				Serie 4	Serie 2	Serie 6		Serie 4		Serie 2
KIV38X22GB	GIN38A55GB	KIR81AF30G	KIL82AF30G	KIR41AF30G	KIR21AF30G	GID18A50GB	KIR24V20GB	KUL15A60GB	KUR15A50GB	GID18A20GB	GUD15A50GB	KIR18V20GB
A+	A+	A++	A++	A++	A++	A+	A+	A++	A+	A+	A+	A+
275	310	116	209	105	97	192	131	140	118	192	184	122
277	212	319	286	211	144	94	221	123	137	94	98	150
217	-	319	252	211	144	-	221	108	131	-	-	150
59	212	-	34	-	-	94	0	15	0	94	98	0
40	40	37	36	33	33	36	34	38	38	36	38	34
-	-		-	-	-	-	-	-	-	-	-	-
-	-		-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
Sliding hinge	Soft close hinge	Flush-folding	Flush-folding	Flush-folding	Flat hinge	Flat hinge	Sliding hinge	Flat hinge	Flat hinge	Sliding hinge	Flat hinge	Sliding hinge
●	●	●	●	●	●	●	●	●	●	●	●	●
1x15 Watt	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	●	●	●	-	-	●
-	●	●	●	●	●	-	-	-	-	-	-	-
1	1	1	1	1	1	1	1	1	1	1	1	1
1	1	1	1	1	1	1	1	1	1	1	1	1
-	-	-	-	-	-	-	-	-	-	-	-	-
1	-	-	-	-	-	-	-	-	-	-	-	-
4-8	-	4-8	4-8	4-8	-	-	-	-	-	-	-	-
-	-	-	-		-	-	-	-	-	-	-	-
●	-	●	●	●	●	-	-	●	●	-	-	●
-	-	-	-	-	-	-	●	-	-	-	-	-
Crisper Box	-	Hydrofresh	Hydrofresh	Hydrofresh	Hydrofresh	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
1	-	-	-	-	-	-	-	-	-	-	-	-
1	-	-	-	-	-	-	1	-	-	-	-	-
5	-	-	-	-	-	-	6	-	-	-	-	-
-	-	7	5	6	4	-	-	2	3	-	-	4
4	-	6	4	5	3	-	5	1	3	-	-	3
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	4	-	-	-	-	-	-	-
●	-	-	-	-	-	-	●	-	-	-	-	-
-	-	-	-	-	-	-	-	3	3	-	-	4
-	-	6	6	5	-	-	-	2	2	-	-	1
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	●	●	●	-	-	-	-	-	-	-	-
-	-	2 x egg tray	2 x egg tray, 1 x ice cube tray	2 x egg tray	2 x egg tray	-	-	1 x egg tray, 1 x ice cube tray	1 x egg tray	-	-	1 x butter dish
										-	-	
****	-	No	****	No	-	-	-	****	-	-	-	-
3	5	-	1	-	-	4	-	-	-	4	3	-
No	Full	No	No	No	-	-	-	-	-	-	-	-
-	●	-	-	-	-	●	-	-	-	●	●	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-		-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
1 x butter dish	-	-	-	-	-	2 x ice packs, 1 x berry tray, 1 x ice cube tray	1 x egg tray	-	-	2 x ice packs, 1 x berry tray, 1 x ice cube tray	2 x ice packs, 1 x ice cube tray	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	Warning function freezer, Warning signal door open	-	-	-	-	Audible, Visual	-	-	-	-	-	-
-	-	-	-	-		-	-	-	-	-	●	-
ST	SN-T	SN-T	SN-ST	SN-T	SN-ST	SN-ST	SN-ST	SN-ST	SN-ST	SN-ST	SN-ST	SN-ST
1772	1772	1772	1772	1221	874	874	1221	820	820	874	820	874
541	556	558	558	558	558	541	541	598	598	541	598	541
545	545	545	545	545	545	542	542	548	548	542	548	542
600	-	-	-	-	-	-	-	-	-	-	-	-
1140	1140	1140	1140	1140	1140	1140	1140	1150	1150	1140	1150	1140-
-	1775	1775	1775	1225	880	-	-	-	-	-	-	-
-	560	560	560	560	560	-	-	-	-	-	-	-
-	550	550	550	550	550	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	50	50	-	50	-

For full specification details, please log onto our website and download a full specification sheet.

Integrated fridges specifications

	Serie 6	Serie 4				
White	**KIR41AD30G**	**KIR21VS30G**	**KIR21VF30G**	**KIR31VS30G**	**KIR41VS30G**	**KIL42VS30G**
PERFORMANCE AND CONSUMPTION						
Energy efficiency class	A++	A++	A++	A++	A++	A++
Energy consumption annual (kWh/annum)	105	97	97	100	105	172
Total unit gross capacity (l)	215	147	147	176	215	196
Total unit net capacity (l)	211	144	144	172	211	195
Refrigerator Gross capacity (l)	215	147	147	176	215	181
Refrigerator Net capacity (l)	211	144	144	172	211	180
Freezer Net capacity (l)	-	-	-	-	-	15
Climate class	SN-T	SN-T	SN-T	SN-T	SN-T	SN-ST
Noise level (dB(A) re 1 pW)	33	36	36	36	37	38
FOOD FRESHNESS SYSTEM						
Number of containers in fridge section	1	1	1	1	1	1
Humidity Control Drawer	●					
Food freshness type	HydroFresh Humidity controlled container	Vegetable container	Vegetable container	Vegetable container	Vegetable container	Vegetable container
KEY FEATURES - FRIDGE						
Temperature display fridge	LED digital Numerical display	digital LED indicator	digital LED indicator	digital LED indicator	digital LED indicator	digital LED indicator
Number of egg racks	2	2	2	2	2	2
Number of door shelves	4	3	3	4	4	4
Number of shelves in fridge	6	4	4	4	6	5
Light	●	●	●	●	●	●
Number of Door Bins - Refrigerator	2	2	2	3	3	3
Tilt-out door bins in fridge	●	●	●	●	●	●
Fully extendable/ Easy Access shelves	●	-	-	-	-	-
Shelves for Bottles	-	-	-	-	-	-
Warning signal door open	acoustic	-	-	-	-	-
Fast cooling switch	●	●	●	●	●	●
KEY FEATURES - FREEZER						
Freezer Star Rating	-	-	-	-	-	4
Temperature adjustable freezer	-	-	-	-	-	●
Door opened indicator freezer	●	-	-	-	-	-
Defrost process freezer section	-	-	-	-	-	Manual
No. of ice cube trays	-	-	-	-	-	1
Number of shelves in fridge compartment	6	4	4	4	6	5
Number of Adjustable Shelves in fridge compartment (Stck)	5	3	3	3	5	4
Material of the shelves	Safety Glass	Safety Glass	Safety Glass	Safety Glass	Safety Glass	Safety Glass
Included accessories	2 x egg tray	2 x egg tray	2 x egg tray	2 x egg tray	2 x egg tray	2 x egg tray, 1 x ice cube tray
Storage period in power failure	-	-	-	-	-	13
FUNCTIONS						
Number of independent cooling systems	1	1	1	1	1	1
Type of control	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Minimum ambient temperature	10	10	10	10	10	10
Maximum ambient temperature	43	43	43	43	43	38
Cold technology	1 compressor/1 cold circuit	1 compressor/1 cold circuit	1 compressor/1 cold circuit	1 compressor/1 cold circuit	1 compressor/1 cold circuit	1 compressor/1 cold circuit
Anti Bacterial	-	-	-	-	-	-
Number of compressors	1	1	1	1	1	1
DIMENSION AND INSTALLATION						
Connection Rating (W)	90	90	90	90	90	90
Current (A)	10	13	10	10	13	13
Voltage (V)	220-240	220-240	220-240	220-240	220-240	220-240
Frequency (Hz)	50	50	50	50	50	50
Length electrical supply cord (cm)	230	230	230	230	230	230
Approval certificates	VDE	VDE	VDE	VDE	VDE	VDE
Type of hinge	Fixed / Flat hinge	Sliding hinge	Fixed / Flat hinge	Sliding hinge	Sliding hinge	Sliding hinge
Reversible Door Hinge	●	●	●	●	●	●
Height of the product (mm)	1221	874	874	1021	1221	1221
Width of the product (mm)	558	538	538	538	538	538
Depth of the product	545	542	542	542	545	545
Depth with open door 90 degree (mm)	1140	1140	1140	1140	1140	1140
Height of the packed product (mm)	1290	950	950	1100	1300	1290
Width of the packed product (mm)	620	610	620	620	620	620
Depth of the packed product (mm)	640	630	640	640	640	640
Width with opened door (90°)	60.00	60.00	60.00	60.00	60.00	60.00
Depth with door open (90°)	114.00	114.00	114.00	114.00	114.00	114.00
Required niche size for installation (HxWxD)	1225.0 x 560 x 550	880 x 560 x 550	880 x 560 x 550	1025.0 x 560 x 550	1225.0 x 560 x 550	1225.0 x 560 x 550
Minimum height for installation (mm)	1225	880	880	1025	1225	1225
Maximum height for installation (mm)	1225	880	880	1025	1225	1225
Minimum width for installation (mm)	560	560	560	560	560	560
Maximum width for installation (mm)	560	560	560	560	560	560
Depth for installation (mm)	550	550	550	550	550	550
Net weight (kg)	49.0	32.0	37.0	37.0	42.0	45.0
Gross weight (kg)	52.0	35.0	40.0	41.0	46.0	49.0
Dimensions of the packed product (cm)	129 x 62 x 64	95 x 61 x 63	95 x 62 x 64	110 x 62 x 64	130 x 62 x 64	129 x 62 x 64
Required cutout/niche size for installation (cm)	122.5 x 56 x 55	88 x 56 x 55	88 x 56 x 55	102.5 x 56 x 55	122.5 x 56 x 55	122.5 x 56 x 55
EAN code	4242002875149	4242002812823	4242002875156	4242002875132	4242002812816	4242002812830

● = Yes
- = No

Dishwasher technical diagrams

Semi integrated, fully integrated and slimline dishwashers



Semi integrated dishwashers



Fully integrated dishwashers



All 60cm dishwasher connection dimensions



45cm dishwashers

We try to keep up to date with constant technological improvements, so from time to time we may update installation guidelines. Therefore we strongly recommend that you download the latest installation guidelines from www.bosch-home.co.uk. Line drawings are for guidance only, and we recommend that you refer to the latest installation guidelines. Though every care is taken to ensure instructions are correct at the time of printing, Bosch cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

Dishwasher specifications

FULLY-INTEGRATED

	Serie 8			Serie 6				
MODEL	**SMV88TD00G**	**SMV87TD00G**	**SBE87TX00G**	**SMV69P15GB**	**SMV69M01GB**	**SBV69M00GB**	**SMV65M10GB**	**SMV53M10GB**
Main colour of product	-	-	-	Brushed steel	Brushed steel	Brushed steel	Brushed steel	Brushed steel
Taller height model	-	-	86.5cm	-	-	86.5cm	-	-
PERFORMANCE								
Reference programme	Eco	Eco	Eco	Eco	Eco	Eco	Eco	Eco
Reference programme temperature (°C)	50	50	50	50	50	50	50	50
Energy efficiency class	A+++	A++	A++	A+	A++	A++	A++	A++
Energy consumption annual (kWh/annum)[1]	237	266	266	299	262	262	262	262
Water consumption annual (l/annum)[1]	2660	2660	2660	2660	1820	1820	2660	2660
Energy consumption (kWh)[2]	0.83	0.93	0.93	1.05	0.92	0.92	0.92	0.92
Water consumption (l)[2]	9.50	9.50	9.50	9.50	6.50	6.50	9.50	9.50
Cleaning performance	A	A	A	A	A	A	A	A
Drying performance	A	A	A	A	A	A	A	A
Number of place settings	14	14	14	14	13	13	13	13
Noise level (dB(A) re 1 pW)	42	44	44	39	44	44	44	46
Total cycle time of reference programme (min)	195	210	210	195	195	195	210	210
PROGRAMMES/ FUNCTIONS								
Number of programmes	8	7	7	6	6	6	6	5
Number of different wash temperatures	6	6	6	5	5	5	5	4
Number of options	5	4	4	4	4	4	2	2
List of programmes	Auto35-45, Auto45-65, Auto65-75, Economy 50, Night Program 50, Super 60, Quick 45, Prerinse	Auto35-45, Auto45-65, Auto65-75, Economy 50, Quick Wash 45	Auto35-45, Auto45-65, Auto65-75, Economy 50, Quick Wash 45	Auto45-65, Delicate 40, Economy 50, Intensive 70, Pre Rinse, Quick Wash 45	Auto45-65, Delicate 40, Economy 50, Intensive 70, Pre Rinse, Quick Wash 45	Auto45-65, Delicate 40, Economy 50, Intensive 70, Pre Rinse, Quick Wash 45	Auto45-65, Delicate 40, Economy 50, Intensive 70, Pre Rinse, Quick Wash 45	Auto45-65, Economy 50, Intensive 70, Pre Rinse, Quick Wash 45
Additional special options	Shine and dry, Half Load, HygienePlus, Intensive Zone, VarioSpeedPlus	Half Load, HygienePlus, Intensive Zone, VarioSpeedPlus	Half Load, HygienePlus, Intensive Zone, VarioSpeedPlus	Half Load, HygienePlus, Intensive Zone, VarioSpeedPlus	Extra dry, Half Load, Intensive Zone, VarioSpeedPlus	Extra dry, Half Load, Intensive Zone, VarioSpeedPlus	Intensive Zone, VarioSpeedPlus	Intensive Zone, VarioSpeedPlus
FLEXIBLE DESIGN ELEMENTS								
VarioDrawer/VarioDrawer Plus/VarioDrawer Pro	VarioDrawer Pro	VarioDrawer Pro	VarioDrawer Pro	VarioDrawer	VarioDrawer Plus	VarioDrawer Plus	-	-
Basket type	VarioFlex Pro	VarioFlex Pro	VarioFlex Pro	VarioFlex Plus	VarioFlex Plus	VarioFlex Plus	VarioFlex Plus	VarioFlex
Adjustable upper basket	3-stage Rackmatic	3-stage Rackmatic	3-stage Rackmatic	3-stage Rackmatic	3-stage Rackmatic	3-stage Rackmatic	3-stage Rackmatic	3-stage Rackmatic
Upper rack cup shelf	-	-	-	2	2	2	2	2
Number of Flip Tines in Upper Rack	6	6	6	6	6	6	6	2
Cup Shelf	2	2	2	2	2	2	2	-
Number of Flip Tines in Lower Rack	8	8	8	4	6	6	6	4
Largest loadable dish upper basket (cm)	21	21	23	21	27	29	27	21
Largest loadable dish lower basket (cm)	31	31	34	30	30	33	30	30
Basket with handle	Bottom basket, Top basket	Bottom basket, Top basket	Bottom basket, Top basket	Bottom basket, Top basket	Bottom basket, Top basket	Bottom basket, Top basket	Bottom basket, Top basket	Bottom basket, Top basket
INNOVATIONS AND TECHNOLOGY								
Zeolith Energy recovery system	●							
Drying system	Heat Exchanger	Heat Exchanger	Heat Exchanger	Heat Exchanger	Heat Exchanger	Heat Exchanger	Heat Exchanger	Heat Exchanger
Load sensor	●	●	●	●	●	●	●	●
Detergent aware	●	●	●	●	●	●	●	●
DossageAssist	●	●	●	●	●	●	●	●
Glass protection system	●	●	●	●	●	●	●	●
Aquasensor	●	●	●	●	●	●	●	●
Self cleaning filter system	●	●	●	●	●	●	●	●
DESIGN FEATURES								
RealTime clock	●	●	●	-	-	-	-	-
TimeLight projection on floor	●	●	-	-	●	-	-	-
InfoLight (red)	-	-	●	●	-	●	●	●
DoorOpen Assist (with childlock function)	●	●	-	-	●	-	-	-
Full colour TFT control	●	●	●	-	-	-	-	-
Interior light	●	●	●	-	-	-	-	-
Start delay time max (hours)	24	24	24	24	24	24	24	24
Time remaining indicator	●	●	●	●	●	●	●	●
End of cycle indicator	Acoustic	Acoustic	Acoustic	Acoustic	Acoustic	Acoustic	Acoustic	Acoustic
Interior cavity material	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Salt light LED indicator	●	●	●	●	●	●	●	●
Rinse aid light LED indicator	●	●	●	●	●	●	●	●
Flood protection system	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr
TECHNICAL SPECIFICATIONS								
Required niche size for installation (HxWxD)	815-875 x 600 x 550	815-875 x 600 x 550	865-925 x 600 x 550	815-875 x 600 x 550	815-875 x 600 x 550	865-925 x 600 x 550	815-875 x 600 x 550	815-875 x 600 x 550
Net weight (kg)	48.0	40.0	41.0	43.0	40.0	41.0	38.0	36.0
Gross weight (kg)	51.0	43.0	44.0	45.0	42.0	44.0	41.0	39.0
Length electrical supply cord (cm)	175	175	175	175	175	175	175	175
Length inlet hose (cm)	165	165	165	165	165	165	165	165
Length outlet hose (cm)	190.0	190.0	190.0	190.0	190.0	190.0	190.0	190.0
Maximum adjustability feet (mm)	60	60	60	60	60	60	60	60
Surge-back protection installed	●	●	●	●	●	●	●	●
Water softener (kWh)[3]	●	●	●	●	●	●	●	●
Maximum accepted water hardness	50°DH	50°DH	50°DH	50°DH	50°DH	50°DH	50°DH	50°DH
Maximum temperature for water intake (°C)	60	60	60	60	60	60	60	60
Included accessories 2	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate
Optional accessories	SGZ1010, SMZ2014, SMZ2055, SMZ5001, SMZ5003, SMZ5005, SMZ5100, SMZ5300	SGZ1010, SMZ2014, SMZ2055, SMZ5001, SMZ5003, SMZ5005, SMZ5100, SMZ5300	SGZ1010, SMZ2014, SMZ2055, SMZ5001, SMZ5003, SMZ5005, SMZ5100, SMZ5300	SGZ1010, SMZ2014, SMZ2055, SMZ5001, SMZ5003, SMZ5005, SMZ5100, SMZ5300	SGZ1010, SMZ2014, SMZ2055, SMZ5001, SMZ5002, SMZ5003, SMZ5005, SMZ5300	SGZ1010, SMZ2014, SMZ5001, SMZ5002, SMZ5003, SMZ5015, SMZ5300	SGZ1010, SMZ2014, SMZ2055, SMZ5001, SMZ5003, SMZ5005, SMZ5100, SMZ5300	SGZ1010, SMZ2014, SMZ2055, SMZ5001, SMZ5002, SMZ5003, SMZ5005, SMZ5300
EAN code	4242002859156	4242002859170	4242002859163	4242002859149	4242002859132	4242002859125	4242002859101	4242002859118

● = Yes
- = No

Key to accessories

SGZ1010 AquaStop extension
SMZ5001 Baby care kit
SMZ5002 Silverware holder cassette
SMZ5100 Vario-cutlery basket (60cm)
SMZ5300 Glass holder accessory
SMZ5005 Front edging Strips (81.5cm)
SMZ5006 Front edging Strips (81.5cm)
SMZ5015 Front edging Strips (86.5cm)
SPZ5100 Vario-cutlery basket (45cm & compacts)

Notes

[1] Based on 280 standard cleaning cycles using cold water fill, including consumption of the standby mode.
[2] The consumption per cleaning cycle of the "Eco 50°" programme using cold water fill.
[3] We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmo/litre (7.0°e) and the water softener in the appliance is turned off. Please contact product advice for further information.
When using an external water softener unit, you will need to set the 'Refill Salt' indicator to zero otherwise over-softening of the water will take place which will result in corrosion of your glassware.
Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to 3/4" screwed joint.
All Bosch built-in dishwashers are suitable for use with doors from 3.5kg-8.5kg if the correct door springs are installed.

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption. Data valid in this table as of April 2015. Subject to modification without prior notice.

Dishwasher specifications

	FULLY-INTEGRATED					SEMI-INTEGRATED		
	Serie 6		Serie 4	Serie 2		Serie 8	Serie 6	Serie 4
MODEL	**SMV53L10GB**	**SMV53L00GB**	**SMV50C10GB**	**SMV40C30GB**	**SMV40C00GB**	**SMI88TS00G**	**SMI65P15GB**	**SMI50C12GB**
Main colour of product	Brushed steel	Silver	Black	Black	Black	Brushed steel	Stainless steel	White
Taller height model	-	-	-	-	-	-	-	-
PERFORMANCE								
Reference programme	Eco	Eco	Eco	Eco	Eco	Eco	Eco	Eco
Reference programme temperature (°C)	50	50	50	50	50	50	50	50
Energy efficiency class	A++	A+	A+	A+	A+	A++	A++	A+
Energy consumption annual (kWh/annum)[1]	258	290	290	290	290	266	262	290
Water consumption annual (l/annum)[1]	2660	3300	3300	3300	3920	2660	1820	2660
Energy consumption (kWh)[2]	0.90	1.02	1.02	1.02	1.02	0.93	0.92	1.02
Water consumption (l)[2]	9.50	11.70	11.70	11.70	14.00	9.50	6.50	9.50
Cleaning performance	A	A	A	A	A	A	A	A
Drying performance	A	A	A	A	A	A	A	A
Number of place settings	12	12	12	12	12	14	13	12
Noise level (dB(A) re 1 pW)	46	48	48	50	54	41	44	46
Total cycle time of reference programme (min)	210	210	210	210	210	195	195	210
PROGRAMMES/ FUNCTIONS								
Number of programmes	5	5	5	4	4	8	6	5
Number of different wash temperatures	4	4	4	3	3	6	5	4
Number of options	3	2	1	1	0	5	4	2
List of programmes	Auto45-65, Economy 50, Intensive 70, Pre Rinse, Quick Wash 45	Auto45-65, Economy 50, Intensive 70, Pre Rinse, Quick Wash 45	Economy 50, Intensive 70, Normal 65, Pre Rinse, Quick Wash 45	Economy 50, Normal 65, Pre Rinse, Quick Wash 45	Economy 50, Normal 65, Pre Rinse, Quick Wash 45	Auto, Economy 50, Night Program 50	Auto, Delicate 40, Economy 50, Intensive 70, Pre Rinse, Quick Wash 45	Auto, Economy 50, Intensive 70, Pre Rinse, Quick Wash 45
Additional special options	Extra dry, Half Load, VarioSpeedPlus	Half Load, VarioSpeed	VarioSpeed	VarioSpeed		Extra dry, Half Load, HygienePlus, Intensive Zone, VarioSpeedPlus	Extra dry, HygienePlus, Intensive Zone, VarioSpeedPlus	Half Load, VarioSpeed
FLEXIBLE DESIGN ELEMENTS								
VarioDrawer/VarioDrawer Plus/VarioDrawer Pro	-	-	-	-	-	-	-	-
Basket type	VarioFlex	VarioFlex	Vario	Vario	Normal	VarioFlex Pro	VarioFlex Plus	Vario
Adjustable upper basket	3-stage Rackmatic	3-stage Rackmatic	3-stage Rackmatic	3-stage Rackmatic	when empty	3-stage Rackmatic	3-stage Rackmatic	3-stage Rackmatic
Upper rack cup shelf	2	2	2	2	2	-	2	-
Number of Flip Tines in Upper Rack	2	2	-	-	-	6	6	-
Cup Shelf	-	-	-	-	-	2	2	-
Number of Flip Tines in Lower Rack	4	4	2	2	-	8	6	2
Largest loadable dish upper basket (cm)	27	27	27	27	22	21	21	27
Largest loadable dish lower basket (cm)	30	30	30	30	30	31	30	30
Basket with handle	Bottom basket, Top basket	Bottom basket, Top basket	Top basket	Top basket	Top basket	Bottom basket, Top basket	Bottom basket, Top basket	Top basket
INNOVATIONS AND TECHNOLOGY								
Zeolith Energy recovery system	-	-	-	-	-	-	-	-
Drying system	Heat Exchanger	Residual	Residual	Residual	Residual	Heat Exchanger	Heat Exchanger	Residual
Load sensor	●	●	●	●	●	●	●	●
Detergent aware	●	●	●	●	●	●	●	●
DossageAssist	●	●	●	●	●	●	●	●
Glass protection system	●	●	●	●	●	●	●	●
Aquasensor	●	●				●	●	●
Self cleaning filter system	●	●	●	●	●	●	●	●
DESIGN FEATURES								
RealTime clock	-	-	-	-	-	●	-	-
TimeLight projection on floor	-	-	-	-	-	●	-	-
InfoLight (red)	●	●	●	●	●	-	-	-
DoorOpen Assist (with childlock function)	-	-	-	-	-	-	-	-
Full colour TFT control	-	-	-	-	-	●	-	-
Interior light	-	-	-	-	-	-	-	-
Start delay time max (hours)	24	24	9	9	-	24	24	24
Time remaining indicator	●	●	-	-	-	●	●	●
End of cycle indicator	Acoustic	Acoustic	Acoustic	Acoustic	Acoustic	Acoustic	-	-
Interior cavity material	Stainless steel/Polinox	Stainless steel/Polinox	Stainless steel/Polinox	Stainless steel/Polinox	Stainless steel/Polinox	Stainless steel	Stainless steel	Stainless steel/Polinox
Salt light LED indicator	●	●	●	●	●	●	●	●
Rinse aid light LED indicator	●	●	●	●	●	●	●	●
Flood protection system	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr
TECHNICAL SPECIFICATIONS								
Required niche size for installation (HxWxD)	815-875 x 600 x 550	815-875 x 600 x 550	815-875 x 600 x 550	815-875 x 600 x 550	815-875 x 600 x 550	815-875 x 600 x 550	815-875 x 600 x 573	815-875 x 600 x 550
Net weight (kg)	35.0	33.0	33.0	30.0	34.0	44.0	42.0	33.0
Gross weight (kg)	38.0	35.0	35.0	33.0	36.0	47.0	44.0	35.0
Length electrical supply cord (cm)	175	175	175	175	175	175	170	175
Length inlet hose (cm)	165	165	165	165	165	165	140	165
Length outlet hose (cm)	190.0	190.0	190.0	190.0	190.0	190.0	170.0	190.0
Maximum adjustability feet (mm)	60	60	60	60	60	60	60	60
Surge-back protection installed	●	●	●	●	●	●	●	●
Water softener (kWh)[3]	●	●	●	●	●	●	●	●
Maximum accepted water hardness	50°DH	50°DH	35°DH	35°DH	35°DH	50°DH	50°DH	50°DH
Maximum temperature for water intake (°C)	60	60	60	60	60	60	60	60
Included accessories 2	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate
Optional accessories	SGZ1010, SMZ2014, SMZ2055, SMZ5000, SMZ5001, SMZ5002, SMZ5003, SMZ5006, SMZ5300	SGZ1010, SMZ2014, SMZ2055, SMZ5000, SMZ5001, SMZ5002, SMZ5003, SMZ5006, SMZ5300	SGZ1010, SMZ2014, SMZ2055, SMZ5000, SMZ5001, SMZ5002, SMZ5003, SMZ5006, SMZ5300	SGZ1010, SMZ2055, SMZ5000, SMZ5001, SMZ5002, SMZ5003, SMZ5006	SGZ1010, SMZ2044, SMZ2055, SMZ5000, SMZ5001, SMZ5002, SMZ5003, SMZ5006, SMZ5025	SGZ1010, SMZ2014, SMZ5001, SMZ5003, SMZ5005, SMZ5100, SMZ5300	SGZ1010, SMZ2014, SMZ5001, SMZ5002, SMZ5003, SMZ5005, SMZ5100	SGZ1010, SMZ2014, SMZ5000, SMZ5001, SMZ5002, SMZ5003, SMZ5006, SMZ5022
EAN code	4242002862026	4242002862019	4242002861906	4242002861890	4242002862071	4242002859194	4242002871677	4242002861838

● = Yes
- = No

Key to accessories

SGZ1010 AquaStop extension
SMZ5001 Baby care kit
SMZ5002 Silverware holder cassette
SMZ5100 Vario-cutlery basket (60cm)
SMZ5300 Glass holder accessory
SMZ5005 Front edging Strips (81.5cm)
SMZ5006 Front edging Strips (81.5cm)
SMZ5015 Front edging Strips (86.5cm)
SPZ5100 Vario-cutlery basket (45cm & compacts)

Notes

[1] Based on 280 standard cleaning cycles using cold water fill, including consumption of the standby mode.

[2] The consumption per cleaning cycle of the "Eco 50°" programme using cold water fill.

[3] We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmo/litre (7.0°e) and the water softener in the appliance is turned off. Please contact product advice for further information.
When using an external water softener unit, you will need to set the 'Refill Salt' indicator to zero otherwise over-softening of the water will take place which will result in corrosion of your glassware.
Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to 3/4" screwed joint.
All Bosch built-in dishwashers are suitable for use with doors from 3.5kg-8.5kg if the correct door springs are installed.

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption. Data valid in this table as of April 2015. Subject to modification without prior notice.

Dishwasher specifications

	SEMI-INTEGRATED		45CM FULLY-INTEGRATED		
	Serie 4		Serie 6	Serie 4	Serie 2
MODEL	**SMI50C15GB**	**SMI50C16GB**	**SPV69T00GB**	**SPV40C10GB**	**SPV40C20GB**
Main colour of product	Silver	Black	Silver	Black	Black
Taller height model	-	-	-	-	-
PERFORMANCE					
Reference programme	Eco	Eco	Eco	Eco	Eco
Reference programme temperature (°C)	50	50	50	50	50
Energy efficiency class	A+	A+	A++	A+	A
Energy consumption annual (kWh/annum)[1]	290	290	211	220	249
Water consumption annual (l/annum)[1]	2660	2660	2660	2660	3220
Energy consumption (kWh)[2]	1.02	1.02	0.75	0.78	0.88
Water consumption (l)[2]	9.50	9.50	9.50	9.50	11.50
Cleaning performance	A	A	A	A	A
Drying performance	A	A	A	A	A
Number of place settings	12	12	10	9	9
Noise level (dB(A) re 1 pW)	46	46	44	48	52
Total cycle time of reference programme (min)	210	210	195	195	180
PROGRAMMES/ FUNCTIONS					
Number of programmes	5	5	6	4	4
Number of different wash temperatures	4	4	5	3	4
Number of options	2	2	3	1	0
List of programmes	Auto, Economy 50, Intensive 70, Pre Rinse, Quick Wash 45	Auto, Economy 50, Intensive 70, Pre Rinse, Quick Wash 45	Auto, Economy 50, Pre Rinse, Quick Wash 45	Economy 50, Intensive 70, Pre Rinse, Quick Wash 45	Economy 50, Intensive 70, Normal, Quick Wash 45
Additional special options	Half Load, VarioSpeed	Half Load, VarioSpeed	HygienePlus, Intensive Zone, VarioSpeedPlus	VarioSpeed	-
FLEXIBLE DESIGN ELEMENTS					
VarioDrawer/VarioDrawer Plus/VarioDrawer Pro	-	-	VarioDrawer	-	-
Basket type	Vario	Vario	VarioFlex Plus	Vario	Vario
Adjustable upper basket	3-stage Rackmatic	3-stage Rackmatic	3-stage Rackmatic	3-stage Rackmatic	3-stage Rackmatic
Upper rack cup shelf	-	-	1	2	1
Number of Flip Tines in Upper Rack	-	-	3	-	-
Cup Shelf	-	-	1	-	-
Number of Flip Tines in Lower Rack	2	2	4	2	-
Largest loadable dish upper basket (cm)	27	27	21	27	22
Largest loadable dish lower basket (cm)	30	30	30	30	30
Basket with handle	Top basket	Top basket	Bottom basket, Top basket	Top basket	Top basket
INNOVATIONS AND TECHNOLOGY					
Zeolith Energy recovery system	-	-	-	-	-
Drying system	Residual	Residual	Heat Exchanger	Residual	Residual
Load sensor	●	●	●	●	●
Detergent aware	●	●	●	●	●
DossageAssist	●	●	●	●	●
Glass protection system	●	●	●	●	●
Aquasensor	●	●	●	-	-
Self cleaning filter system	●	●	●	●	●
DESIGN FEATURES					
RealTime clock	-	-	-	-	-
TimeLight projection on floor	-	-	●	-	-
InfoLight (red)	-	-	-	-	-
DoorOpen Assist (with childlock function)	-	-	-	-	-
Full colour TFT control	-	-	-	-	-
Interior light	-	-	-	-	-
Start delay time max (hours)	24	24	24	9	-
Time remaining indicator	●	●	●	-	-
End of cycle indicator	-	-	Acoustic	Acoustic	Acoustic
Interior cavity material	Stainless steel/Polinox	Stainless steel/Polinox	Stainless steel	Stainless steel	Stainless steel
Salt light LED indicator	●	●	●	●	●
Rinse aid light LED indicator	●	●	●	●	●
Flood protection system	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr
TECHNICAL SPECIFICATIONS					
Required niche size for installation (HxWxD)	815-875 x 600 x 550	815-875 x 600 x 550	815-875 x 450 x 550	815-875 x 450 x 550	815-875 x 450 x 550
Net weight (kg)	33.0	33.0	32.0	29.0	26.0
Gross weight (kg)	35.0	35.0	34.0	31.0	28.0
Length electrical supply cord (cm)	175	175	175	175	175
Length inlet hose (cm)	165	165	165	165	165
Length outlet hose (cm)	190.0	190.0	205.0	205.0	205.0
Maximum adjustability feet (mm)	60	60	60	60	60
Surge-back protection installed	●	●	●	●	●
Water softener (kWh)[3]	●	●	●	●	●
Maximum accepted water hardness	50°DH	50°DH	50°DH	35°DH	35°DH
Maximum temperature for water intake (°C)	60	60	60	60	60
Included accessories 2	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate	Large item spray head, Steam deflector plate	Vapor barrier plate
Optional accessories	SGZ1010, SMZ2014, SMZ2044, SMZ5000, SMZ5001, SMZ5002, SMZ5003, SMZ5006, SMZ5025	SGZ1010, SMZ2014, SMZ5000, SMZ5001, SMZ5002, SMZ5003, SMZ5006	SGZ1010, SMZ5000, SMZ5001, SMZ5003, SMZ5005, SMZ5300, SPZ5100	SGZ1010, SGZ3003, SMZ5000, SMZ5001, SMZ5003, SMZ5005, SMZ5300	SGZ1010, SGZ3003, SMZ5000, SMZ5001, SMZ5003, SMZ5005
EAN code	4242002861845	4242002861852	4242002871691	4242002872940	4242002872957

● = Yes
- = No

Key to accessories

SGZ1010 AquaStop extension
SMZ5001 Baby care kit
SMZ5002 Silverware holder cassette
SMZ5100 Vario-cutlery basket (60cm)
SMZ5300 Glass holder accessory
SMZ5005 Front edging Strips (81.5cm)
SMZ5006 Front edging Strips (81.5cm)
SMZ5015 Front edging Strips (86.5cm)
SPZ5100 Vario-cutlery basket (45cm & compacts)

Notes

[1] Based on 280 standard cleaning cycles using cold water fill, including consumption of the standby mode.
[2] The consumption per cleaning cycle of the "Eco 50°" programme using cold water fill.
[3] We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmo/litre (7.0°e) and the water softener in the appliance is turned off. Please contact product advice for further information.
When using an external water softener unit, you will need to set the 'Refill Salt' indicator to zero otherwise over-softening of the water will take place which will result in corrosion of your glassware.
Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to 3/4" screwed joint.
All Bosch built-in dishwashers are suitable for use with doors from 3.5kg-8.5kg if the correct door springs are installed.

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption. Data valid in this table as of April 2015. Subject to modification without prior notice.

Home laundry technical diagrams

Washing machines and washer dryers

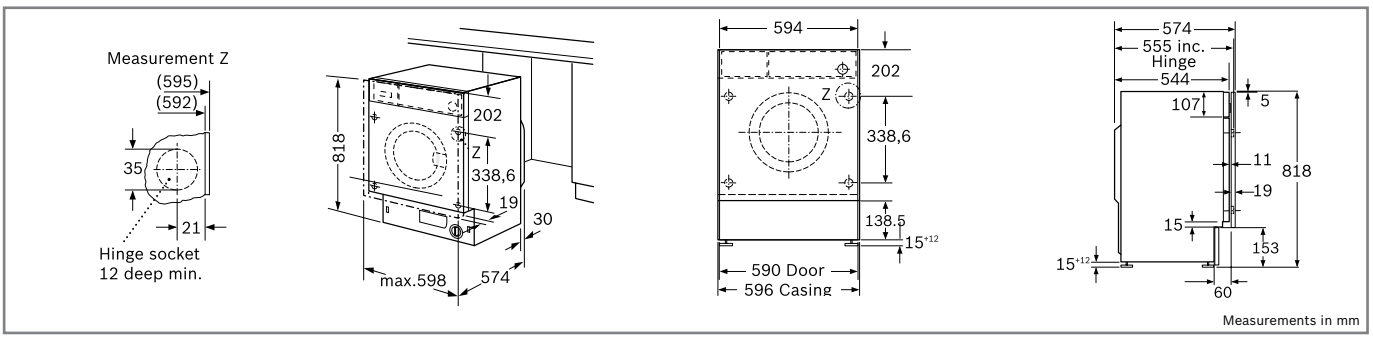

WIS28441GB | WIS24141GB

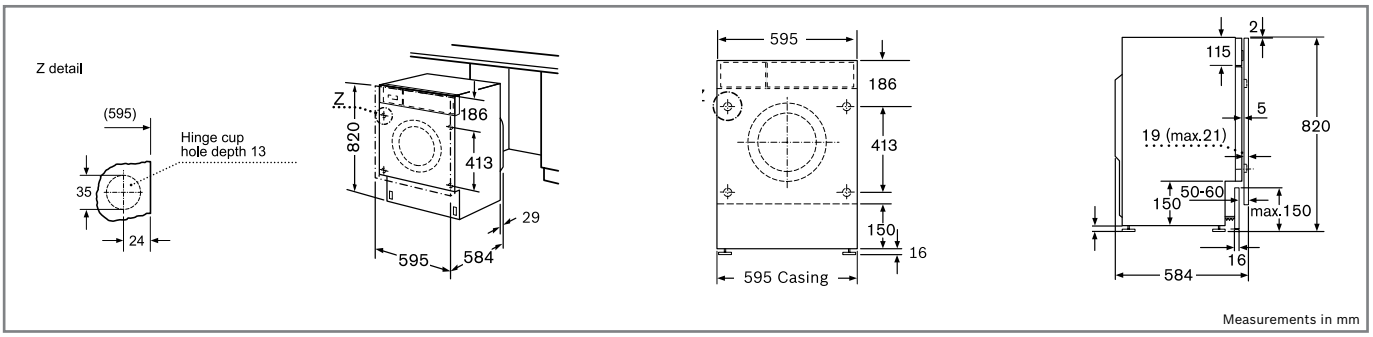

WKD28540GB | WKD28350GB

We try to keep up to date with constant technological improvements, so from time to time we may update installation guidelines. Therefore we strongly recommend that you download the latest installation guidelines from www.bosch-home.co.uk. Line drawings are for guidance only, and we recommend that you refer to the latest installation guidelines. Though every care is taken to ensure instructions are correct at the time of printing, Bosch cannot accept responsibility for incorrect planning or installation as a result of the use of these line drawings.

Home laundry specifications

WASHING MACHINES

		Serie 8	
White		**WIS28441GB**	**WIS24141GB**
PERFORMANCE			
Energy efficiency class		A+	A+
Capacity cotton	kg	7.0	7.0
Maximum spin speed	rpm	1400	1200
Moisture content% on dry load after max. spin		53	59
Washing performance class		A	A
Spin drying performance class		B	C
Energy consumption annual	kWh/annum	220	220
Ø Energy consumption 40 °C cotton programme (partial load)	kWh	0.86	0.86
Ø Energy consumption 60 °C cotton programme (full load)	kWh	0.95	0.95
Ø Energy consumption 60 °C cotton programme (partial load)	kWh	1.01	1.01
Water consumption annual	l/annum	11000	11000
Average washing time cotton 40°C (partial load)		135	135
Average washing time cotton 60°C (full load)	min	165	165
Average washing time cotton 60°C (partial load)		160	160
Drum volume	l	55	55
Noise level washing (dB)		46	46
Noise level spinning (dB)		64	63
PROGRAMMES/FUNCTIONS			
Standard Programmes			
Cottons		●	●
Easy-care programme		●	●
Wool programme		●	●
Delicates / Silk		●	●
Rinse		●	●
Spin		●	●
Empty		●	●
Specialist Programmes			
Superquick 15		●	-
Powerwash 60		●	-
Sensitive		●	-
Sportswear		●	-
Dark wash		●	-
Power Wash 60		●	-
Mixed Load		●	●
Options			
Pre Wash		●	●
Wash plus		●	●
Reduced Ironing		●	●
Aqua plus		●	●
Variable Temperature		●	●
Variable Spin		●	-
Spin speed reduction		-	●
KEY FEATURES			
Express Wash System		●	●
ADDITIONAL FEATURES			
softSurge Drum		●	●
Time delay		24	-
Time remaining		●	-
Foam Detection System		●	●
Safeguard Monitoring System		●	●
Noise Insulation		●	●
Water Protection system		Aquastop	Aquastop
TECHNICAL INFORMATION			
Dimensions (HxWxD) (exc door)		81.8 x 60 x 55.5	81.8 x 60 x 55.5
Display		LED Display	-
Cabinet Colour		white	white
Door Colour		white	white
Door Opening		130	130
Door Hinge		left-hand	left-hand
Length of supply cord	cm	225	225
Fully Integrable		●	●
EAN Code		4242002805719	4242002805726
OPTIONAL ACCESSORIES			
Height Adjustment		WMZ20440	WMZ20440
Connecting Piece		WMZ20470	WMZ20470
Floor Securing Kit		WMZ2200	WMZ2200
Extension for water inlet		WMZ2380	WMZ2380

● = Yes
- = No

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

WASHER DRYER

		Serie 6	Serie 4
White		**WKD28540GB**	**WKD28350GB**
PERFORMANCE			
Energy efficiency class		B	B
Capacity cotton (kg) washing		6.0	6.0
Capacity cotton (kg) drying		3.0	3.0
Maximum spin speed (rpm)		1400	1400
Washing performance class		A	A
Energy consumption (wash and dry of full wash load)	kWh	4.86	4.86
Energy consumption (wash only)	kWh	1.02	1.02
Total annual energy consumption (Washing and drying 200 full loads)	kWh	972	972
Total annual water consumption (Washing only 200 full loads)	l	10400	10400
Water consumption (wash and dry full wash load)	l	80	80
Total annual water consumption (Washing and drying 200 full loads)	l	19000	19000
Total annual energy consumption (Washing only 200 full loads)	kWh	204	204
Average washing time cotton 60°C (full load)	min	212	212
Drum volume	l	52	52
Noise level washing	dB	57	57
Noise level spinning	dB	74	74
Noise level drying	dB	60	60
PROGRAMMES			
Standard programmes			
Cottons		●	●
Easy-care programme		●	●
Wool programme		●	●
Delicates / Silk		●	●
Intensive Dry		●	●
Gentle Dry		●	●
Rinse		●	●
Spin		●	●
Empty		●	●
Specialist programmes			
SuperQuick15		●	-
Night Wash		●	-
Sportswear		●	-
Sensitive		●	-
Mixed load		●	●
Fluff Removal Programme		●	●
Options			
Wash plus		●	●
Reduced Ironing		●	●
Rinse plus		●	●
Pre wash		●	●
Variable temperature		●	●
Variable spin		●	●
Spin speed reduction		●	●
Flexi Time		●	●
KEY FEATURES			
Full Electronic Control Dial for all wash and special programmes		●	●
Time selection options		●	●
ADDITIONAL FEATURES			
Aquatronic Wash System		●	●
Time Delay		24 hours	24 hours
Foam Detection System		●	●
Safeguard monitoring system		●	●
Child Lock		●	●
Water Protection system		Multiple water protection	AquaSecure
TECHNICAL INFORMATION			
Dimensions of the product (exc door)	cm	82 x 59.5 x 58.4	82 x 59.5 x 58.4
Length electrical supply cord	cm	220.00	220.00
Display		LED	LED
Cabinet Colour		white	white
Door Colour		white	white
Door Opening		95	95
Door Hinge		Left-hand	Left-hand
Fully Integrable		●	●
EAN code		4242002554594	4242002553740
OPTIONAL ACCESSORIES			
Connecting Piece (between appliance and 90cm worktop)		WMZ20470	WMZ20470
Floor Securing Kit		WMZ2200	WMZ2200
Extension for water inlet		WMZ2380	WMZ2380

● = Yes
- = No

Built-in ovens accessories

Description	Accessory Nr.	HBG634BS1B	HBG634BB1B	HBG656RS1B	HBG656RB1B	HBG674BS1B	HBG674BB1B	HBG6764S1B	HBG6764B1B	HRG6769S1B
Single level telescopic shelf rails for Serie 8 non-pyrolytic, non-steam 60cm single ovens	HEZ638100	●	●	●	●	-	-	-	-	-
Single level telescopic shelf rails for Serie 8 60cm single pyrolytic ovens	HEZ638170	-	-	-	-	●	●	●	●	●
Single level telescopic shelf rails for Serie 8 non-pyrolytic, non-steam 45cm compact ovens	HEZ638108	-	-	-	-	-	-	-	-	-
Single level telescopic shelf rails for Serie 8 45cm compact pyrolytic ovens	HEZ638178	-	-	-	-	-	-	-	-	-
Full width enamelled baking tray for Serie 8 60cm single and 45cm compact ovens	HEZ631070	●	●	●	●	●	●	●	●	●
Full width wire shelf for Serie 8 60cm single and 45cm compact ovens	HEZ634000	●	●	●	●	●	●	●	●	●

Description	Accessory Nr.	CMG656BS1B	CMG656BB1B	CMG633BS1B	CBG675BS1B	CSG656BS1B	CNG6764S1B
Single level telescopic shelf rails for Serie 8 non-pyrolytic, non-steam 60cm single ovens	HEZ638100	-	-	-	-	-	-
Single level telescopic shelf rails for Serie 8 60cm single pyrolytic ovens	HEZ638170	-	-	-	-	-	-
Single level telescopic shelf rails for Serie 8 non-pyrolytic, non-steam 45cm compact ovens	HEZ638108	●	●	●	-	-	-
Single level telescopic shelf rails for Serie 8 45cm compact pyrolytic ovens	HEZ638178	-	-	-	●	-	-
Full width enamelled baking tray for Serie 8 60cm single and 45cm compact ovens	HEZ631070	●	●	●	●	●	●
Full width wire shelf for Serie 8 60cm single and 45cm compact ovens	HEZ634000	●	●	●	●	●	●

Electric hobs accessories

	Description	Accessory Nr.	PIZ975N17E	PIP875N17E	PIV675N14E	PIN675N17E	PIN651F17E	PIE975N14E	PIM875N14E	PIM851F17E	PIL811F17E	PIE675N14E	PIE651F17E
	Set of four pans	HEZ390042	●	●	●	●	●	●	●	●	●	●	●
	Connecting strip	HEZ394301	●	●	●	●	–	●	●	–		●	–
	Teppan yaki approx. 40x20cm	HEZ390512	●	●	●	●	●	–	–	–	–	–	–
	Teppan yaki approx. 30x20cm	HEZ390511	●	●	●	●	●	–	–	–	–	–	–
	Griddle plate approx. 40x20cm	HEZ390522	●	●	●	●	●	–	–	–	–	–	–
	Rectangular roasting pan with lid approx. 30x20cm	HEZ390011	●	●	●	●	●	–	–	–	–	–	–
	Steamer pan insert of use with HEZ390011 roasting pan	HEZ390012	●	●	●	●	●	–	–	–	–	–	–

	Description	Accessory Nr.	PIE611B17E	PIA611F18E	PIA611B68B	PIE375C14E	PKN811D17E	PKE611D17E	PKF659C17E	PKE611C17E	NCT615C01 NCT616C01 NCT612C01	PKF375V14E
	Set of four pans	HEZ390042	●	●	●	–	–	–	–	–	–	–
	Connecting strip	HEZ394301	–	–	–	●	–	–	–	–	–	●
	Teppan yaki approx. 40x20cm	HEZ390512	–	–	–	–	–	–	–	–	–	–
	Teppan yaki approx. 30x20cm	HEZ390511	–	–	–	–	–	–	–	–	–	–
	Griddle plate approx. 40x20cm	HEZ390522	–	–	–	–	–	–	–	–	–	–
	Rectangular roasting pan with lid approx. 30x20cm	HEZ390011	–	–	–	–	–	–	–	–	–	–
	Steamer pan insert of use with HEZ390011 roasting pan	HEZ390012	–	–	–	–	–	–	–	–	–	–

Gas hobs accessories

	Description	Accessory Nr.	PPS816M91E	PPS916B91E	PCR715M90E	PCH615M90E	PPQ716B91E	PPP616B91E	POP6B6B80	PCS815B90E
	Connecting strip	HEZ394301	–	–	–	–	–	–	–	–

	Description	Accessory Nr.	PCQ715B90E	PCP615B90B PCP616B90E PCP612B90E	PBH6B5B60	PBP6B5B60 PBP6B2B60	PRA326B90E	PRB326B90E
	Connecting strip	HEZ394301	–	–	–	–	●	●

Hoods accessories

	Description	Accessory Nr.	DIA098E50B	DIB091U51B	DWK098E51B	DWA097E51B DWA067E51B	DWA078E50B	DWA094W51B DWA064W51B	DWA094W50B DWA074W50B DWA064W50B	DWB098E51B	DWB097A50B DWB067A50B	DWB09W452B DWB06W452B
	Recirculating kit (needed if recirculating)	DHZ5145	–	–	–	–	–	–	–	–	–	–
	Recirculating kit (needed if recirculating)	DHZ5325	–	–	●	●	●	●	●	–	●	●
	Recirculating kit (needed if recirculating)	DHZ5345	–	–	–	–	–	–	–	●	–	–
	Recirculating kit (needed if recirculating)	DHZ5365	●	–	–	–	–	–	–	–	–	–
	Recirculating kit (needed if recirculating)	DHZ5385	–	●	–	–	–	–	–	–	–	–
	Recirculating kit (needed if recirculating)	DHZ5595	–	–	–	–	–	–	–	–	–	–
	Recirculating kit (needed if recirculating)	DSZ5100	–	–	–	–	–	–	–	–	–	–
	Recirculating kit (needed if recirculating)	DHZ5275	–	–	–	–	–	–	–	–	–	–
	900 x 720mm brushed steel back panel	DHZ9551	–	–	–	–	–	–	–	–	–	–
	700 x 720mm brushed steel back panel	DHZ7551	–	–	–	–	–	–	–	–	–	–
	600 x 720mm brushed steel back panel	DHZ6551	–	–	–	–	–	–	–	–	–	–
	Decor panel black	DSZ0660	–	–	–	–	–	–	–	–	–	–
	Decor panel white	DSZ0620	–	–	–	–	–	–	–	–	–	–

Hoods accessories

	Description	Accessory Nr.	DWB094W50B	DWB074W50B DWB064W50B	DWW097A50B	DWW077A50B	DWW067A50B	DWW09W460B DWW06W460B	DWW09W450B DWW07W450B	DWW06W450B
	Recirculating kit (needed if recirculating)	DHZ5145	–	–	–	–	–	–	–	–
	Recirculating kit (needed if recirculating)	DHZ5325	–	●	–	●	●	–	–	–
	Recirculating kit (needed if recirculating)	DHZ5345	●	–	●	–	–	–	–	–
	Recirculating kit (needed if recirculating)	DHZ5365	–	–	–	–	–	–	–	–
	Recirculating kit (needed if recirculating)	DHZ5385	–	–	–	–	–	–	–	–
	Recirculating kit (needed if recirculating)	DHZ5995	–	–	–	–	–	–	–	–
	Recirculating kit (needed if recirculating)	DSZ5100	–	–	–	–	–	–	–	–
	Recirculating kit (needed if recirculating)	DHZ5275	–	–	–	–	–	●	●	●
	900 x 720mm brushed steel back panel	DHZ9551	–	–	–	–	–	–	–	–
	700 x 720mm brushed steel back panel	DHZ7551	–	–	–	–	–	–	–	–
	600 x 720mm brushed steel back panel	DHZ6551	–	–	–	–	–	●	–	●
	Decor panel black	DSZ0660	–	–	–	–	–	–	–	–
	Decor panel white	DSZ0620	–	–	–	–	–	–	–	–

Description	Accessory Nr.	DHI635HGB	DHE645MGB	DHE635BGB	DHL535BGB	DHU625MGB	DHU635PGB DHU636PGB DHU632PGB	DHL785CGB	DHL575CGB	DHU645PGB DHU646PGB DHU642PGB
Recirculating kit	DHZ3405	●	–	–	–	–	–	–	–	–
Recirculating kit	DHZ5605	–	–	–	–	–	–	●	●	–
Stainless steel profile	DHZ4650	–	–	–	–	–	–	–	–	–
Stainless steel profile with front open	DHZ4655	–	–	–	–	–	–	–	–	–
Stainless steel profile	DHZ4950	–	–	–	–	–	–	–	–	–
Stainless steel profile with front open	DHZ4955	–	–	–	–	–	–	–	–	–
Carbon filter	DHZ7305	–	–	–	–	–	–	–	–	–
Carbon filter	DHZ7304	–	–	–	●	–	–	–	–	–
Carbon filter	DSZ11AF	–	●	●	–	–	–	–	–	–
Carbon filter	DHZ2400	–	–	–	–	●	–	–	–	–
Carbon filter	DHZ2701	–	–	–	–	–	●	–	–	●

Integrated cooling accessories

Description	Accessory Nr.	KAD62V40GB	KAN62V41GB	KAN58A55GB
Water filter	640565	–	–	●
Water filter	644845	●	–	–

Dishwasher accessories

Description	Accessory Nr.	SMI88TS00G	SMI65P15GB	SMI50C12GB	SMI50C15GB	SMI50C16GB	SMV88TD00G
Aquastop extension	SGZ1010	●	●	●	●	●	●
Stainless steel door and plinth panel	SMZ2044	–	–	–	●	–	–
Bottle and small parts holders	SMZ5001	●	●	●	●	●	●
Silver polishing cassette	SMZ5002	●	●	●	●	●	●
Drop hinge for tall cabinets	SMZ5003	●	●	●	●	●	●
Stainless steel panel strips	SMZ5005	●	●	–	–	–	●
Stainless steel panel strips	SMZ5006	–	–	●	●	●	–
Stainless steel decor conversion kit	SMZ5025	–	–	–	●	–	–
Adjustable cutlery basket	SMZ5100	●	–	–	–	–	●

Description	Accessory Nr.	SMV53L00GB	SMV50C10GB	SPV69T00GB	SPV40C10GB	SPV40C20GB
Aquastop extension	SGZ1010	●	●	–	–	–
Stainless steel door and plinth panel	SMZ2044	–	–	–	–	–
Bottle and small parts holders	SMZ5001	●	●	–	–	–
Silver polishing cassette	SMZ5002	●	●	–	–	–
Drop hinge for tall cabinets	SMZ5003	●	●	–	–	–
Stainless steel panel strips	SMZ5005	–	–	–	–	–
Stainless steel panel strips	SMZ5006	●	●	–	–	–
Glass holder accessory	SMZ5300	●	●	●	●	●

Home laundry accessories

	Description	Accessory Nr.	WIS28441GB	WIS24141GB	WKD28540GB	WKD28350GB
	Floor securing component	WMZ2200	●	●	●	●
	Adjustment kit for higher work surfaces (850mm to 870mm)	WMZ20470	●	●	●	●
	Extension for cold water inlet/ Aquastop	WMZ2380	●	●	●	●
	Height adjustable feet	WMZ20440	●	●	–	–

Washing machine specifications

	WASHING MACHINES									
	Serie 8				Serie 6				Serie 4	
MODEL	WAY28791GB	WAW28660GB	WAW32560GB	WAW28560GB	WAT28460GB	WAT24460GB	WAQ283S1GB	WAQ2836SGB	WAE28377GB	WAE24377GB
PERFORMANCE										
Energy efficiency class	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++
Capacity cotton (kg)	9.0	9.0	9.0	9.0	8.0	8.0	8.0	8.0	7.0	7.0
Maximum spin speed (rpm)	1400	1400	1600	1400	1400	1200	1400	1400	1400	1200
Moisture content % on dry load after max. spin	53	53	44	53	53	53	53	53	53	53
Washing performance class	A	A	A	A	A	A	A	A	A	A
Spin drying performance class	B	B	A	B	B	B	B	B	B	B
Energy consumption annual (kWh/annum)	152	152	152	152	137	137	135	135	165	165
Ø Energy consumption 40 °C cotton programme (partial load) kWh	0.42	0.42	0.42	0.42	0.35	0.35	0.51	0.51	0.67	0.67
Ø Energy consumption 60 °C cotton programme (full load) kWh	0.92	0.92	0.92	0.92	0.74	0.74	0.64	0.64	0.72	0.72
Ø Energy consumption 60 °C cotton programme (partial load) kWh	0.6	0.60	0.60	0.60	0.70	0.70	0.53	0.53	0.73	0.73
10% more economical than the standard value of 217kWh p.a.										
30% more economical than the standard value of 196kWh p.a.	●	●	●	●	●	●	●	●		
Water consumption annual (l/annum)	11220	11220	11220	11220	9900	9900	9460	9460	10686	10686
Average washing time cotton 40C (partial load)	270	270	270	270	210	210	240	240	185	185
Average washing time cotton 60C (full load) (min)	275	275	275	275	210	210	240	240	215	215
Average washing time cotton 60C (partial load)	270	270	270	270	210	210	240	240	215	215
Power consumption in off-mode	0.12	0.12	0.12	0.12	0.12	0.12	0.17	0.17	0.20	0.20
Power consumption in left-on mode	0.43	0.43	0.43	0.43	0.43	0.43	2.00	2.00	1.90	1.90
Drum volume (l)	65	65	65	65	63	63	58	58	55	55
Noise level washing (dB(A) re 1 pW)	47	47	47	47	49	50	51	51	57	59
Noise level spinning (dB(A) re 1 pW)	71	71	73	71	74	74	77	77	77	77
PROGRAMMES/FUNCTIONS										
Standard Programmes										
Cottons	●	●	●	●	●	●	●	●	●	●
Easy-care programme	●	●	●	●	●	●	●	●	●	●
Wool programme	●	●	●	●	●	●	●	●	●	●
Delicates/Silk	●	●	●	●	●	●	●	●	●	●
Rinse	●	●	●	●	●	●	●	●	●	●
Spin	●	●	●	●	●	●	●	●	●	●
Empty	●	●	●	●	●	●	●	●	●	●
Specialist Programmes										
i-DOS detergent dosing system		●								
Memory programmes	●									
Auto Programmme		●								
Auto stains removal	●		●	●						
Super Quick 15 /Super Quick 15/30	●	●	●	●	-/●	-/●	●/-	●/-	●/-	●/-
Sportswear	●	●	●	●	●	●				
Allergy+	●	●	●	●	●	●				
Sensitive										
Dark Wash					●	●				
Mixed Load	●	●	●	●			●	●	●	●
Night Wash	●				●	●				
Jeans							●	●		
Shirts and blouses	●		●	●	●	●				
Duvet		●	●	●						
Towels	●									
Down Wear	●				●	●				
Options										
EcoPerfect	●	●	●	●	●	●	●	●	●	●
SpeedPerfect	●	●	●	●	●	●	●	●	●	●
Wash Plus	●	●	●	●	●	●	●	●	●	●
Reduced Ironing	●	●	●	●	●	●	●	●	●	●
Aqua Plus/Extra Rinse	●/-	●	●	●	●/-	●/-	●/-	●/-	●/-	●/-
Pre Wash	●	●	●	●	●	●	●	●	●	●
Variable Temperature	●	●	●	●	●	●	●	●	●	●
Variable Spin	●	●	●	●	●	●	●	●	●	●
Drum Clean		●	●	●	●	●				
KEY FEATURES										
EcoSilence Drive	●	●	●	●	●	●	●	●		
EcoBar+/EcoBar	●/●	●	●	●	●	●	●	●	●	●
VarioPerfect	●	●	●	●	●	●	●	●	●	●
ActiveWater system	●	●	●	●	●	●	●	●		
AntiVibration design	●	●	●	●	●	●	●	●		
ADDITIONAL FEATURES										
SoftSurge Drum										
Wave Drum	●	●	●	●	●	●	●	●		
Time delay	24 hours	24 hours	24 hours	24 hours	24 hours	24 hours	24 hours	24 hours	24 hours	24 hours
Time remaining	●	●	●	●	●	●	●	●	●	●
Reload facility	●	●	●	●	●	●	●	●	●	●
Overdosage indication	●	●	●	●	●	●	●	●	●	●
Child lock	●	●	●	●	●	●	●	●	●	●
Self cleaning dispenser	●	●	●	●	●	●	●	●		
Drum interior light	●	●	●	●						
Safeguard monitoring system	●	●	●	●	●	●	●	●	●	●
Water protection system	Multiple water protection	Multiple water protection	Multiple water protection	Multiple water protection	Multiple water protection	Multiple water protection	Multiple water protection	Multiple water protection	Multiple water protection	Multiple water protection
Type of control	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
TECHNICAL INFORMATION										
Dimensions of the product (cm)	85.0 x 60.0 x 59.0	84.5 x 60.0 x 59.0	84.5 x 60.0 x 59.0	84.5 x 60.0 x 59.0	84.8 x 59.8 x 59.0	84.8 x 59.8 x 59.0	84.8 x 59.8 x 55.0	84.8 x 59.8 x 55.0	84.8 x 60.0 x 59.0	84.8 x 60.0 x 59.0
Height for building under (cm)	85.00	85.00	85.00	85.00	85.00	85.00	82.00	82.00	82.00	82.00
Depth with door open (90°)	108	106.30	106.30	106.30	104.90	104.90	101.80	101.80	99.00	99.00
Height-adjustable by	1.20	1.20	1.20	1.20	1.00	1.00	1.00	1.00	1.50	1.50
Appl depth incl wall distance	59	59	59	59	59	59	55	55	59	59
Length electrical supply cord (cm)	175.0	175.0	175.0	175.0	150.0	150.0	150.0	150.0	150.0	150.0
Length of drain hose (cm)	150.00	150.00	150.00	150.00	150.00	150.00	150.00	150.00	150.00	150.00
Display	TFT	LED	LED	LED	LED	LED	LED	LED	LED	LED
Cabinet colour	White	White	White	White	White	White	White	Stainless Steel	White	White
Door colour	Chrome white	Chrome white	Chrome white	Chrome white	Silver White	Silver White	White	Silver inox	White	White
Door hinge	Left-hand	Left-hand	Left-hand	Left-hand	Left-hand	Left-hand	Left-hand	Left-hand	Left-hand	Left-hand
Removable top					-	-	●	●	●	●
EAN code	4242002863924	4242002821702	4242002822547	4242002822396	4242002823652	4242002841489	4242002801513	4242002798394	4242002832067	4242002833620
OPTIONAL ACCESSORIES										
Build under kit					WMZ20430		WMZ20331	WMZ20331	WMZ2420	WMZ2420
Floor fixing kit	WMZ2200	WMZ2200	WMZ2200	WMZ2200	WMZ2200	WMZ2200	WMZ2200	WMZ2200	WMZ2200	WMZ2200
Extension to water inlet	WMZ2380	WMZ2380	WMZ2380	WMZ2380	WMZ2380	WMZ2380	WMZ2380	WMZ2380	WMZ2380	WMZ2380

● = Yes
- = No

Cottons 60+ecoPerfect and Cottons 40/60+ ecoPerfect are the standard washing programmes to which the information in the label relates. These programmes are suitable to clean normally soiled cotton laundry and are the most efficient programmes in terms of combined energy and water consumption. Annual energy and water consumption based on 220 standard wash cycles.

Tumble dryers and washer dryer specifications

WASHER DRYER

	Serie 6		Silver edition
MODEL	**WVH28422GB**	**WVG30461GB**	**WVG3046SGB**
PERFORMANCE			
Energy efficiency class	A	A	A
Capacity cotton (Kg) washing	7.0	8.0	8.0
Capacity cotton (Kg) drying	4.0	5.0	5.0
Maximum spin speed (rpm)	1400	1500	1500
Washing performance class	A	A	A
Energy consumption (wash and dry of full wash load) (kWh)	4.76	5.44	5.44
Energy consumption (wash only) (kWh)	0.70		
Total annual energy consumption (Washing and drying 200 full loads) (kWh)	952	1088	1088
Total annual energy consumption (Washing only 200 full loads) (kWh)	140	166	166
Water consumption (wash and dry full wash load) (l)	57	118	118
Total annual water consumption (Washing and drying 200 full loads) (l)	11400	23600	23600
Total annual water consumption (Washing only 200 full loads) (l)	10200	14200	14200
Average washing time cotton 60C (full load) (min)	240	420	420
Average drying time min 60C cotton(automatic washing and drying process)			
Drum volume (l)	56	56	56
Noise level washing (dB(A) re 1 pW)	48	52	52
Noise level spinning (dB(A) re 1 pW)	74	74	74
Noise level drying (93,5%) dB	60	59	59
PROGRAMMES			
Standard Programmes			
Cottons	●	●	●
Easy-care programme	●	●	●
Wool programme	●	●	●
Delicates / Silk	●	●	●
Intensive Dry	●	●	●
Gentle Dry	●	●	●
Rinse	●	●	●
Spin	●	●	●
Empty	●	●	●
Specialist Programmes			
Automatic drying programme	●	●	●
Super Quick 15	●	●	●
Wash and Dry 60 mins	●	●	●
HygieneCare	●	●	●
Drum Clean	●		
Sportswear		●	●
Allergy+	●	●	●
Mixed load	●	●	●
Options			
Reduced Ironing	●		
Aqua Plus/Rinse Plus	●/-	-/●	-/●
Pre Wash	●	●	●
Variable Temperature	●	●	●
Variable Spin	●	●	●
KEY FEATURES			
AirCondensation technology	●		
EcoSilence Drive	●	●	●
VarioPerfect	●	●	●
AutoDry function	●	●	●
Self cleaning condenser	●		
ADDITIONAL FEATURES			
SoftSurge drum	●	●	●
Time delay	24 hours	24 hours	24 hours
Time remaining	●	●	●
Reload facility	●	●	●
Ovedosage indication	●	●	●
Safeguard monitoring system	●	●	●
Noise insulation	●		
Child safety lock	●	●	●
Water protection system	AquaSecure	Multiple water protection	Multiple water protection
Type of control	Electronic	Electronic	Electronic
TECHNICAL INFORMATION			
Dimensions of the product (cm)	84.5 x 60.0 x 59.0	85.0 x 60.0 x 59.0	85.0 x 60.0 x 59.0
Depth with open door 90 degree (cm)	108	108	108
Maximum adjustability feet (cm)	1.2	1.2	1.2
Length electrical supply cord (cm)	210.0	210.0	210.0
Display	LED	LED	LED
Cabinet colour	White	White	White
Door colour	Silver black	Silver black	Silver black
Door hinge	Left-hand	Left-hand	Left-hand
Removable top			
EAN code	4242002748375	4242002863030	4242002863047
OPTIONAL ACCESSORIES			
Build under cover		WMZ2420	WMZ2420
Floor fixing kit	WMZ2200		
Extension for cold water inlet	WMZ2380		

● = Yes
- = No

TUMBLE DRYER

	Serie 8		Serie 6			Serie 4		Classic
MODEL	**WTY86791GB**	**WTW87560GB**	**WTW85490GB**	**WTG86400GB**	**WTW863S1GB**	**WTE84301GB**	**WTE84106GB**	**WTA74200GB**
PERFORMANCE								
Energy efficiency class	A++	A++	A++	B	A++	B	B	C
Capacity cotton (Kg)	9.0	9.0	8.0	8.0	7.0	7.0	7.0	7.0
Energy consumption annual (kWh/annum)	258.0	259.0	232.0	561.0	212.0	504.0	504.0	482.0
Energy consumption standard cotton programme full load (kWh)	2.13	2.13	1.80	4.63	1.65	4.20	4.20	3.90
Energy consumption standard cotton programme half load (kWh)	1.21	1.21	1.04	2.61	0.97	2.30	2.30	2.29
Programme Time standard cotton programme full load (mins)	157	157	203	137	178	124	124	128
Programme Time standard cotton programme half load (mins)	97	97	122	82	110	76	76	77
Condensation efficiency class	A	A	B	B	B	B	B	-
Condensation efficiency for standard cotton programme on full and partial load	91%	91%	86%	88%	86%	89%	89%	-
Power consumption in off mode	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Duration of left on mode	30	30	30	30	0	0	0	0
Drum volume (l)	112	112	112	112	112	112	112	112
Noise level (dB(A) re 1 pW)	64	64	65	65	65	64	66	65
PROGRAMMES/ FUNCTIONS								
Standard Programmes								
Cottons	●	●	●	●	●	●	●	●
Easy-care	●	●	●	●	●	●	●	●
Woollen Finish	●	●	●	●	●	●	-	●
Superquick 40	●	●	●	●	●	●	●	●
Freshen Up	●	-	-	-	-	-	-	-
Timed programmes	●	●	●	●	●	●	●	●
Mixed Fabrics	●	●	●	●	●	●	-	●
Sportswear	●	●	●	●	●	●	●	●
Shirts 15	-	-	-	●	-	-	-	-
Towels	●	●	●	-	-	-	-	●
Delicates	●	●	-	-	-	-	-	●
Down Wear	●	●	●	●	-	-	-	-
Shirts and blouses	●	●	●	-	-	-	-	-
Blankets	●	-	-	-	-	-	-	-
Allergy+	-	●	-	●	-	-	-	-
Duvet	-	●	-	-	-	-	-	-
Wool /Trainer basket	-	-	-	-	-	-	-	-
Options								
Buzzer	●	●	●	●	●	●	-	●
Low Heat option	●	●	●	●	●	●	●	●
Reduced Ironing	●	●	●	●	●	●	-	●
KEY FEATURES								
ActiveAir Technology	●	●	●	-	●	-	-	-
Heat pump	●	●	●	-	●	-	-	-
Self cleaning condenser	●	●	●	-	●	-	-	-
Sensor drying with revolution drying system	●	●	●	●	●	●	●	●
ADDITIONAL FEATURES								
Drum with soft paddles	●	●	●	●	●	●	●	●
Anti crease cycle (mins)	120	120	120	120	120	120	120	60
Time delay	24	24	24	24	24	24	-	24
Time remaining	●	●	●	●	●	●	-	●
Drum interior light	●	●	●	●	●	-	-	-
Water container full/blocked filter warning indicator	●/●	●/●	●/●	●/●	●/●	●/●	●/●	-/●
Child lock	●	●	●	●	●	-	-	-
TECHNICAL INFORMATION								
Dimensions of the product (cm)	84.2 x 59.8 x 63.4	84.2 x 59.8 x 63.6	84.2 x 59.7 x 63.6	84.2 x 59.7 x 63.6	84.2 x 59.8 x 63.6	84.2 x 59.8 x 63.9	84.2 x 59.8 x 63.9	84.2 x 59.7 x 62.9
Depth with open door 90 degree (cm)	108.6	107	109.1	109.1	109.1	102	102	103.6
Maximum adjustability feet (cm)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Length electrical supply cord (m)	1.45	1.45	1.45	1.45	1.45	1.45	1.45	1.45
Display	TFT	LED	LED	LED	LCD	LED	LED	LED
Cabinet colour	White	White	White	White	White	White	White	White
Door colour	Chrome/White	Chrome/White	Silver/White	Silver/White	White	White	White	White
Door hinge	Reversible	Right-hand	Right-hand	Right-hand	Right-hand	Right-hand	Right-hand	Right-hand
Removable top	-	-	-	-	●	●	●	-
Location of vent	-	-	-	-	-	-	-	At rear, Left-hand
Vent hose length (cm)	-	-	-	-	-	-	-	20.00
Type of control	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
EAN code	4242002863955	4242002815718	4242002819693	4242002834986	4242002781365	4242002764597	4242002764603	4242002766607
OPTIONAL ACCESSORIES								
Cover plate	-	WTZ10290	-	-	WTZ10290	WTZ10290	WTZ10290	-
Stacking kit with pull out shelf	WTZ11400	WTZ11400	WTZ11400	WTZ11400	WTZ11400	WTZ11300	WTZ11300	WTZ11400
Stacking kit	WTZ20410	-	WTZ20410	WTZ20410	WTZ20410	WTZ11310	WTZ11310	WTZ11311
Condenser Drain kit	-	-	-	WTZ1110	-	WTZ1110	WTZ1110	-
Replacement Vent kit	-	-	-	-	-	-	-	WTZ1130

● = Yes
- = No

The programme cotton cupboard dry used at full and partial loads is the standard drying programme to which the information on the energy label refers. This is the most efficient programme in terms of energy consumption for cotton.
Annual consumption is based on 160 drying cycles.

Data valid in this table as of April 2015. Subject to modification without prior notice.

Dishwasher specifications

60CM DISHWASHERS

		Serie 8	Serie 6				Serie 4		
MODEL		**SMS88TW02G**	**SMS69M22GB**	**SMS69M12GB**	**SMS53M08GB**	**SMS53M02GB**	**SMS50C18GB**	**SMS50C26GB**	**SMS50C12GB**
Colour		White	White	White	Silver inox	White	Silver inox	Black	White
PERFORMANCE									
Reference programme for measurements		Economy 50	Economy 50	Economy 50	Economy 50	Economy 50	Economy 50	Economy 50	Economy 50
Energy efficiency class		A+++	A++	A+	A++	A++	A++	A++	A++
Total annual energy consumption[1]	kWh	237	262	299	262	262	258	258	258
Total annual water consumption[1]	litres	2660	1820	2660	2660	2660	2660	2660	2660
Energy consumption[2]	kWh	0.83	0.92	1.05	0.92	0.92	0.90	0.90	0.90
Water consumption[2]	litres	9.5	6.5	9.5	9.5	9.5	9.5	9.5	9.5
Number of place settings		14	13	14	13	13	12	12	12
Cleaning performance class		A	A	A	A	A	A	A	A
Drying efficiency class		A	A	A	A	A	A	A	A
Noise level (dB(A) re 1 pW)		42	44	38	46	46	48	48	48
Total cycle time of reference programme	min	195	195	195	210	210	210	210	210
PROGRAMMES/ FUNCTIONS									
Number of programmes		8	6	6	5	5	5	5	5
Number of options		5	4	4	2	2	2	2	2
Number of different wash temperatures		6	6	5	4	4	4	4	4
List of programmes		Auto 65-75°C Auto 45-65°C Auto 35-45°C Economy 50°C Quick Wash 45°C Pre Rinse Super 60°C Night Program 50°C	Intensive 70°C Auto 45-65°C Economy 50°C Delicate 40°C TurboSpeed 20 min Pre Rinse	Intensive 70°C Auto 45-65°C Economy 50°C Delicate 40°C Quick Wash 45°C Pre Rinse	Intensive 70°C Auto 45-65°C Economy 50°C Quick Wash 45°C Pre Rinse	Intensive 70°C Auto 45-65°C Economy 50°C Quick Wash 45°C Pre Rinse	Intensive 70°C Normal 65°C Economy 50°C, Quick Wash 45°C Pre Rinse	Intensive 70°C Normal 65°C Economy 50°C Quick Wash 45°C Pre Rinse	Intensive 70°C Normal 65°C Economy 50°C Quick Wash 45°C Pre Rinse
Additional special options		Shine & Dry Intensive Zone VarioSpeedPlus Half Load HygienePlus	Intensive Zone VarioSpeedPlus Half Load ExtraDry	Intensive Zone VarioSpeedPlus Half Load ExtraDry	Intensive Zone VarioSpeed	Intensive Zone VarioSpeed	Half Load VarioSpeed	Half Load VarioSpeed	Half Load VarioSpeed
FLEXIBLE DESIGN ELEMENTS									
VarioDrawer		VarioDrawer Pro	VarioDrawer	VarioDrawer Plus	-	-	-	-	-
Basket Description		VarioFlex Pro	VarioFlex Plus	VarioFlex Plus	VarioFlex	VarioFlex	Vario	Vario	Vario
Adjustable upper basket		3-stage Rackmatic™	3-stage Rackmatic™	3-stage Rackmatic™	3-stage Rackmatic™	3-stage Rackmatic™	Adjustable when empty	Adjustable when empty	Adjustable when empty
Cup shelves upper/ lower baskets		2 /2	2 /2	2 /2	2 /-	2 /-	2 /-	2 /-	2 /-
Largest loadable dish upper/ lower basket (cm)		21 / 31	27 / 30	21 / 30	27 / 30	27 / 30	27 / 30	27 / 30	27 / 30
INNOVATIONS AND TECHNOLOGY									
Drying system		Zeolith	Heat exchanger	Heat exchanger	Heat exchanger	Heat exchanger	Heat exchanger	Heat exchanger	Heat exchanger
Load Sensor		●	●	●	●	●	●	●	●
AquaSensor		●	●	●	●	●	●	●	●
Detergent aware		●	●	●	●	●	●	●	●
DosageAssist		●	●	●	●	●	●	●	●
DuoPower spray arm		-	-	-	-	-	-	-	-
DESIGN FEATURES									
Start delay time max	hours	24	24	24	24	24	24	24	24
Flood protection system		AquaStop 24hr	Internal	AquaStop 24hr	Internal	Internal	Internal	Internal	Internal
Time remaining indicator		●	●	●	●	●	●	●	●
Emotion light		●	-	-	-	-	-	-	-
End of cycle indicator		Acoustic	-	-	-	-	-	-	-
Salt light indicator		●	●	●	●	●	●	●	●
Rinse aid light indicator		●	●	●	●	●	●	●	●
Safety features		Door lock	Door lock	Door lock	Door lock, tamperproof control	Door lock, tamperproof control	Door lock	Door lock	Door lock
Self cleaning filter system		●	●	●	●	●	●	●	●
TECHNICAL SPECIFICATIONS									
Maximum adjustability feet		2	2	2	2	2	2	2	2
Depth with open door 90 degree	cm	115.5	115.5	115.5	115.5	115.5	115.5	115.5	115.5
Length electrical supply cord	cm	175	175	175	175	175	175	175	175
Length inlet hose	cm	165	165	165	165	165	165	165	165
Length outlet hose	cm	190	190	190	190	190	190	190	190
Removable worktop		●	●	●	●	●	●	●	●
Height of the product with worktop	cm	84.5	84.5	84.5	84.5	84.5	84.5	84.5	84.5
Height of the product without worktop	cm	81.5	81.5	81.5	81.5	81.5	81.5	81.5	81.5
Width of the product	cm	60	60	60	60	60	60	60	60
Depth of the product	cm	60	60	60	60	60	60	60	60
Net weight	kg	54	48	54	49	48	49	49	49
Gross weight	kg	57	49	56	50	50	50	50	50
Water softener[3]		●	●	●	●	●	●	●	●
Maximum accepted water hardness	DH	50°DH	50°DH	50°DH	50°DH	50°DH	50°DH	50°DH	50°DH
Maximum temperature for water intake	°C	60	60	60	60	60	60	60	60
Included accessories		Large item spray head	Large item spray head	Large item spray head	Large item spray head	Large item spray head	Large item spray head	Large item spray head	Large item spray head
Optional accessories (see below)		SGZ1010, SMZ5001, SMZ5100, SMZ5300	SGZ1010, SMZ5001, SMZ5002, SMZ5300	SGZ1010, SMZ5001, SMZ5100, SMZ5300	SGZ1010, SMZ5001, SMZ5002, SMZ5300	SGZ1010, SMZ5001, SMZ5002, SMZ5300	SGZ1010, SMZ5001, SMZ5002, SMZ5300	SGZ1010, SMZ5001, SMZ5002, SMZ5300	SGZ1010, SMZ5001, SMZ5002, SMZ5300
EAN code		4242002854625	4242002868301	4242002864686	4242002854250	4242002854243	4242002861883	4242002866468	4242002861869

● = Yes
- = No

Key to accessories: SGZ1010: Aquastop extension, **SMZ5300:** Wine glass holder, **SMZ5001:** Bottle and small parts holders, **SMZ5002:** Silver polishing cassette, **SMZ5100:** Adjustable cutlery basket, **SPZ5100:** Vario cutlery basket, **SZ73100:** Cutlery basket

[1] Based on 280 standard cleaning cycles using cold water fill, including consumption of the standby mode.
[2] The consumption per cleaning cycle of the "Eco 50" programme using cold water fill.

[3] We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmo/litre (7.0°e) and the water softener in the appliance is turned off. Please contact product advice for further information.

Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to ¾" screwed joint.

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

Data valid in this table as of April 2015. Subject to modification without prior notice.

Dishwasher specifications

		45CM DISHWASHERS			COMPACT DISHWASHERS					
		Serie 6			Serie 4	Serie 4	Serie 2			
MODEL		**SPS59T02GB**	**SPS53M08GB**	**SPS53M02GB**	**SPS40E12GB**	**SKS62E22EU**	**SKS51E11EU**	**SKS51E26EU**	**SKS51E28EU**	**SKS50E32EU**
Colour		White	Silver inox	White	White	White	Red	Black	Silver inox	White
PERFORMANCE										
Reference programme for measurements		Economy 50	Economy 50	Economy 50	Economy 50	Economy 50	Economy 50	Economy 50	Economy 50	Economy 50
Energy efficiency class		A+	A+	A+	A+	A+	A+	A+	A+	A+
Total annual energy consumption[1]	kWh	237	220	220	220	174	174	174	174	174
Total annual water consumption[1]	litres	2660	2660	2660	2660	2240	2240	2240	2240	2240
Energy consumption[2]	kWh	0.84	0.78	0.78	0.78	0.61	0.61	0.61	0.61	0.61
Water consumption[2]	litres	9.5	9.5	9.5	9.5	8.0	8.0	8.0	8.0	8.0
Number of place settings		10	9	9	9	6	6	6	6	6
Cleaning performance class		A	A	A	A	A	A	A	A	A
Drying efficiency class		A	A	A	A	A	A	A	A	A
Noise level (dB(A) re 1 pW)		44	48	48	48	48	48	48	48	54
Total cycle time of reference programme	min	195	195	195	195	225	225	225	225	200
PROGRAMMES/ FUNCTIONS										
Number of programmes		5	5	5	4	6	5	5	5	5
Number of options		4	2	2	1	2	1	1	1	0
Number of different wash temperatures		4	4	4	3	5	5	5	5	5
List of programmes		Intensive 70°C Auto 45-65°C Economy 50°C Quick Wash 45°C Pre Rinse	Intensive 70°C Auto 45-65°C Economy 50°C Quick Wash 45°C Pre Rinse	Intensive 70°C Auto 45-65°C Economy 50°C Quick Wash 45°C Pre Rinse	Intensive 70°C Economy 50°C Quick Wash 45°C Pre Rinse	Intensive 70°C Auto 45-65°C Economy 50°C Delicate 40°C Quick Wash 45°C Pre Rinse	Intensive 70°C Normal 65°C Economy 50°C Delicate 40°C Quick Wash 45°C	Intensive 70°C Normal 65°C Economy 50°C Delicate 40°C Quick Wash 45°C	Intensive 70°C Normal 65°C Economy 50°C Delicate 40°C Quick Wash 45°C	Intensive 70°C Normal 65°C Economy 50°C Delicate 40°C Quick Wash 45°C
Additional special options		Intensive Zone Hygiene VarioSpeedPlus ExtraDry	Intensive Zone VarioSpeed	Intensive Zone VarioSpeed	VarioSpeed	VarioSpeed ExtraDry	ExtraDry	ExtraDry	ExtraDry	-
FLEXIBLE DESIGN ELEMENTS										
VarioDrawer		VarioDrawer	-	-	-	-	-	-	-	-
Basket Description		VarioFlex Plus	VarioFlex	VarioFlex	Vario	Vario	Vario	Vario	Vario	Vario
Adjustable upper basket		3-stage Rackmatic™	3-stage Rackmatic™	3-stage Rackmatic™	Adjustable when empty	-	-	-	-	-
Cup shelves upper/ lower baskets		1 /1	2 /-	2 /-	1 /-	- /2	- /2	- /2	- /2	- /2
Largest loadable dish upper/ lower basket (cm)		21 / 30	27 / 30	27 / 30	27 / 30	28	28	28	28	28
INNOVATIONS AND TECHNOLOGY										
Drying system		Heat exchanger	Heat exchanger	Heat exchanger	Heat exchanger	Residual heat	Residual heat	Residual heat	Residual heat	Residual heat
Load Sensor		●	●	●	●	●	●	●	●	●
AquaSensor		●	●	●	●	●	-	-	-	-
Detergent aware		●	●	●	●	●	●	●	●	●
DosageAssist		●	●	●	●	●	●	●	●	●
DuoPower spray arm		●	●	●	●	-	-	-	-	-
DESIGN FEATURES										
Start delay time max	hours	24	24	24	24	24	-	-	-	-
Flood protection system		AquaStop 24hr	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr	AquaStop 24hr	Internal	Internal	Internal	Internal
Time remaining indicator		●	●	●	●	●	-	-	-	-
Emotion light		-	-	-	-	-	-	-	-	-
End of cycle indicator		-	-	-	-	-	-	-	-	-
Salt light indicator		●	●	●	●	●	●	●	●	●
Rinse aid light indicator		●	●	●	●	●	●	●	●	●
Safety features		Door lock, tamperproof controls	Door lock, tamperproof controls	Door lock, tamperproof controls	-	-	-	-	-	-
Self cleaning filter system		●	●	●	●	●	●	●	●	●
TECHNICAL SPECIFICATIONS										
Maximum adjustability feet		2	2	2	2	-	-	-	-	
Depth with open door 90 degree	cm	115.5	115.5	115.5	115.5	84.5	84.5	84.5	84.5	84.5
Length electrical supply cord	cm	175	175	175	175	170	170	170	170	170
Length inlet hose	cm	165	165	165	165	150	150	150	150	150
Length outlet hose	cm	205	205	205	205	226	226	226	226	226
Removable worktop		●	●	●	●	-	-	-	-	-
Height of the product with worktop	cm	84.5	84.5	84.5	84.5	45	45	45	45	45
Height of the product without worktop	cm	81.5	81.5	81.5	81.5	-	-	-	-	-
Width of the product	cm	45	45	45	45	55.1	55.1	55.1	55.1	55.1
Depth of the product	cm	60	60	60	60	50	50	50	50	50
Net weight	kg	43	41	41	41	21	21	21	21	20
Gross weight	kg	44	43	42	42	24	24	24	24	23
Water softener[3]		●	●	●	●	●	●	●	●	●
Maximum accepted water hardness	DH	50°DH	50°DH	50°DH	35°DH	50°DH	35°DH	35°DH	35°DH	35°DH
Maximum temperature for water intake	°C	60	60	60	60	60	25	25	25	25
Included accessories		Large item spray head	Large item spray head	Large item spray head	Large item spray head	-	-	-	-	-
Optional accessories (see below)		SGZ1010, SMZ5001, SMZ5300, SPZ5100	SGZ1010, SMZ5001, SMZ5300	SGZ1010, SMZ5001, SMZ5300	SGZ1010, SMZ5001, SMZ5300	SGZ1010, SGZ3003, SPZ5100, SZ73100	SGZ1010, SPZ5100	SGZ1010, SPZ5100	SGZ1010, SPZ5100	SGZ1010, SPZ5100
EAN code		4242002858098	4242002858081	4242002858074	4242002858050	4242002861234	4242002861197	4242002861210	4242002861227	4242002841670

● = Yes
- = No

Key to accessories: SGZ1010: Aquastop extension, **SMZ5300:** Wine glass holder, **SMZ5001:** Bottle and small parts holders, **SMZ5002:** Silver polishing cassette, **SMZ5100:** Adjustable cutlery basket, **SPZ5100:** Vario cutlery basket, **SZ73100:** Cutlery basket

[1] Based on 280 standard cleaning cycles using cold water fill, including consumption of the standby mode.
[2] The consumption per cleaning cycle of the "Eco 50" programme using cold water fill.

[3] We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmo/litre (7.0°e) and the water softener in the appliance is turned off. Please contact product advice for further information.

Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to ¾" screwed joint.

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

Data valid in this table as of April 2015. Subject to modification without prior notice.

Fridge and wine cabinet specifications

		UPRIGHT FRIDGES							WINE CABINETS	
		Logixx		Exxcel			Classixx			
MODEL		KSV 36AW41G	KSV 36AW31G	KSV 36VW30G	KSV 36VB30G	KSV 33VW30G	KSV 36NW30G	KSV 29NW30G	KSW 30V80GB	KTW 18V80GB
PERFORMANCE AND CONSUMPTION										
Energy efficiency class		A+++	A++	A++	A++	A++	A+	A++	C	B
Annual energy consumption	kWh	75	112	112	112	110	152	107	266	153
Refrigerator net capacity	litres	346	346	346	346	324	355	290	-	-
Total unit net capacity	litres	-	-	-	-	-	-	-	360	140
Capacity in 0.75l (bordeaux bottles)		-	-	-	-	-	-	-	120	43
Noise level dB (re 1pW)		38	39	39	39	39	39	39	38	38
DESIGN FEATURES										
Main colour of product		White	White	White	Black	White	White	White	Silver	Silver
Colour of sides		White	White	White	Black	White	White	White	-	-
Type of handle		Bar	Bar	Bar	Bar	Bar	Bar	Bar	-	-
Reversible Door, hinged right		-	-	-	-	-	●	●	-	-
Door hinge		Left, reversible	Left, reversible	Left, reversible	Left, reversible	Left, reversible	Left, reversible	Left, reversible	-	-
LED light		●	●	●	●	●	-	-	-	-
Light		-	-	-	-	-	●	●	-	-
Number of compressors		1	1	1	1	1	1	1	-	-
Number of cooling circuits		1	1	1	1	1	1	1	-	-
Number of evaporators		1	1	1	1	1	-	-	-	-
Number of independent cooling systems		-	-	-	-	-	-	-	1	1
Number of temperature zones		-	-	-	-	-	-	-	1	1
Range of temperature	°C	-	-	-	-	-	-	-	6-18	6-18
FOOD FRESHNESS SYSTEM										
Interior ventilator		●	●	●	●	●	-	-	-	-
Humidity control drawer		●	●	●	●	●	-	-	-	-
Food preservation containers		HydroFresh / ChillerBox	HydroFresh / ChillerBox	CrisperBox	CrisperBox	CrisperBox	-	-	-	-
Anti bacterial air filter		-	-	-	-	-	-	-	-	-
KEY FEATURES - FRIDGE SECTION										
Bottle rack in fridge				●	●	●	-	-	-	-
Fully extendable glass shelves for easy reach		●	●	-	-	-	7	-	-	-
Number of glass safety shelves		7	7	7	7	7	7	5	-	-
FlexShelf for additional storage		●	●	-	-	-	-	-	-	-
Number of shelves in door (including EasyLift)		4	5	5	5	5	5	4	-	-
EasyLift flexible shelf in door		●	●	-	-	-	-	-	-	-
Thermometer		Digital 7 segment	Digital 7 segment	Digital 7 segment	Digital 7 segment	Digital LED	-	-	-	-
Number of adjustable shelves		5	5	5	5	5	5	3	-	-
Number of door bins in fridge		2	2	2	2	2	-	-	-	-
Number of shelves		-	-	-	-	-	-	-	-	-
Number of easy pull-out shelves		5	-	-	-	-	-	-	-	-
Number of door bins		-	-	-	-	-	-	-	-	-
Number of door shelves		-	-	-	-	-	-	-	-	-
Shelves for bottles		-	-	-	-	-	-	-	-	-
Included accessories: egg tray, bottle gripper		1 / –	1 / –	1 / –	1 / –	1 / –	-	-	-	-
KEY FEATURES - WINE COOLER										
Number of shelves		-	-	-	-	-	-	-	9	4
Number of adjustable shelves		-	-	-	-	-	-	-	8	3
Type of glass door		-	-	-	-	-	-	-	2 glass panels, UV-filter	2 glass panels, UV-filter
Door hinge		-	-	-	-	-	-	-	Right	Right
FUNCTIONS										
Defrost process fridge section		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	-	-
Electronic display		1 x LED display	1 x LED display	1 x LED display	1 x LED display	1 x LED display	-	-	-	-
Fast cooling switch		●	●	●	●	●	-	-	-	-
DIMENSION AND INSTALLATION										
Climate class		SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	ST	ST
Height of the product	mm	1860	1860	1860	1860	1760	1860	1610	1850	850
Width of the product	mm	600	600	600	600	600	600	600	595	595
Depth of the product		650	650	650	650	650	650	650	620	620
Depth with open door 90°	mm	1200	1200	-	-	-	-	1200	-	1135
Temperature display fridge		-	-	-	-	-	-	-	-	-
Type of control		-	-	-	-	-	Mechanical	Mechanical	-	-
EAN code		4242002739205	4242002740225	4242002696065	4242002696065	4242002692340	4242002693965	4242002693026	4242002465555	4242002465548

[1] EC rating scheme designed to compare energy efficiency of comparable appliances.
[2] Climate Class SN: Room temperatures +10°C to +32°C
Climate Class N: Room temperatures +16°C to +32°C
Climate Class ST: Room temperatures +18°C to +38°C
Climate Class T: Room temperatures +18°C to +43°C
[3] **** Freezer at -18°C or less, for fresh & frozen food.
[4] Freezer capacity quoted may only be attained by switching to constant operation and not on a 24 hour basis.
[5] Temperature increases from -18°C to -9°C, time taken is when appliance is full. When only partially stocked, less time is involved.
[6] Actual energy consumption will depend on how the appliance is used and where it is located.

As a guideline A++ means very economical, A+ economical, A is average, and B-G represents a high consumption. Consumption rates are quoted to assist comparisons for different appliances. During actual operation, consumption may vary slightly. All cooling appliances require adequate ventilation (min. 200cm^2) Please refer to user / installation instructions. Wine coolers require a ventilation distance of 4cm around the appliance for optimum performance on installation.

Data in this table valid as of April 2015.
Subject to modification without prior notice.

Freezer specifications

	UPRIGHT FREEZERS								CHEST FREEZERS		
	Logixx		Exxcel			Classixx					
MODEL	**GSN 36AW31G**	**GSN 58AW30G**	**GSN 36VB30**	**GSN 33VW30G**	**GSN 36VW30G**	**GSV 36VW31G**	**GSV 29VW31G**	**GSV 24VW31G**	**GCM 24AW20G**	**GCM 28AW30G**	**GCM 34AW20G**
PERFORMANCE AND CONSUMPTION											
Energy efficiency class	A++	A++	A++	A++	A++	A++	A++	A++	A+	A++	A+
Annual energy consumption kWh	234	301	234	225	212	212	194	183	260	219	334
Freezer net capacity litres	237	360	237	220	237	237	198	173	251	311	390
Noise level dB (re 1pW)	42	42	42	42	42	42	42	42	42	43	42
DESIGN FEATURES											
Main colour of product	White	White	Black	White	White	White	White	White	White	White	White
Colour of sides	White	White	Black	White	White	White	White	White	-	-	-
Type of handle	-	-	-	-	-	-	-	-	Aluminium horizontal bar	Aluminium horizontal bar	Aluminium horizontal bar
Reversible door, hinged right	●	●	●	●	●	●	●	●	-	-	-
LED light	●	●	-	-	●	-	-	-	-	-	-
Light	-	-	-	-	-	-	-	-	●	●	●
Defrost process	-	-	-	-	-	-	-	Manual	Manual	Manual	Manual
Number of compressors	1	1	1	1	1	1	1	1	1	1	1
Number of cooling circuits	1	1	1	1	1	1	1	1	1	1	1
Number of evaporators	1	1	1	1	1	1	-	-	-	-	-
FOOD FRESHNESS SYSTEMS											
Temperature adjustable	●	●	●	●	●	●	●	●	-	-	-
KEY FEATURES - FREEZER SECTION											
No Frost system	●	●	●	●	●	●	-	-	-	-	-
Number of drawers (including BigBox)	5	5	5	5	5	5	5	5	2	2	-
Number of freezing flaps	2	3	2	2	2	2	3	1	-	-	-
Shelf material	Glass	Glass	Glass	Glass	Glass	Glass	-	-	-	-	-
Counterbalanced lockable lid	-	-	-	-	-	-	-	-	●	●	-
Included accessories: ice packs, ice cube tray	3 / –	– / 1	2 / –	2 / –	2 / –	2 / –	1 / 1	2 / 1	-	-	-
Included accessories	-	-	-	-	-	-	-	-	1 x water defrost tray	1 x water defrost tray	1 x water defrost tray
Optional accessories	KSZ36AW00	KSZ36AW00	KSZ36AL00	KSZ36AW00	KSZ36AW00	KSZ36AW00	KSZ36AW00	KSZ36AW00	-	-	-
FUNCTIONS											
Type of control	-	-	-	-	-	-	-	-	-	-	Mechanical
Fast freezing switch	●	●	●	●	●	●	●	●	●	●	●
Temperature adjustable	-	-	-	-	-	-	-	-	-	-	-
Thermometer	Digital	Digital	Digital	Digital	Digital	Digital	None	None	-	-	-
DIMENSION AND INSTALLATION											
Climate class	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T
Connection rating W	90	90	90	90	90	90	90	90	-		90
Height of the product mm	1860	1910	1860	1760	1860	1860	1610	1460	916	916	916
Width of the product mm	600	700	600	600	600	600	600	600	1010	1180	1405
Depth of the product mm	650	780	650	650	650	650	650	650	743	743	743
Depth with open door 90° mm	-	-	-	-	-	-			-	-	-
EAN code	4242002740287	4242002693927	4242002693804	4242002693781	4242002693941	4242002693910	4242002693934	4242002688381	4242002711867	4242002710808	4242002711881

Cooling technical diagrams

American Style Fridge Freezers

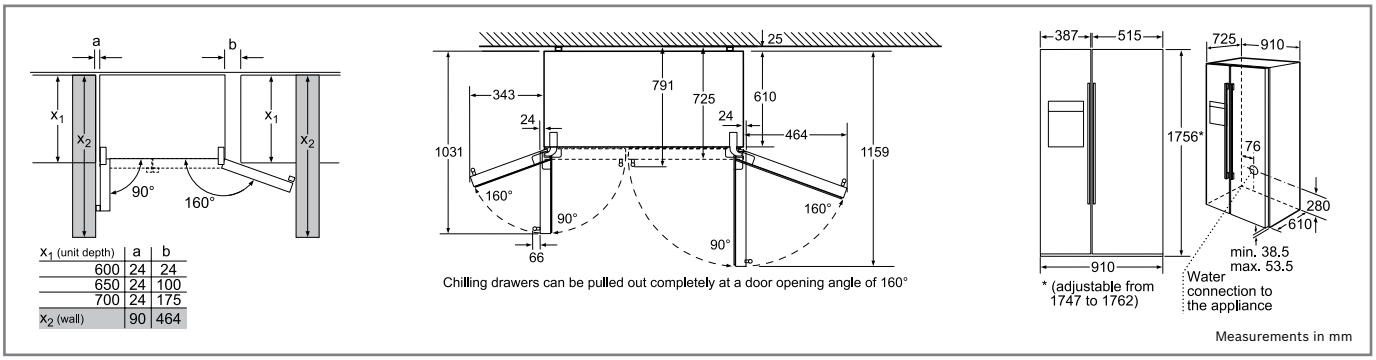

KAD62V40GB | KAN62V41GB **N.B.** Doors need to be able to be opened to a minimum of 160° angle to allow the drawers to be fully accessible

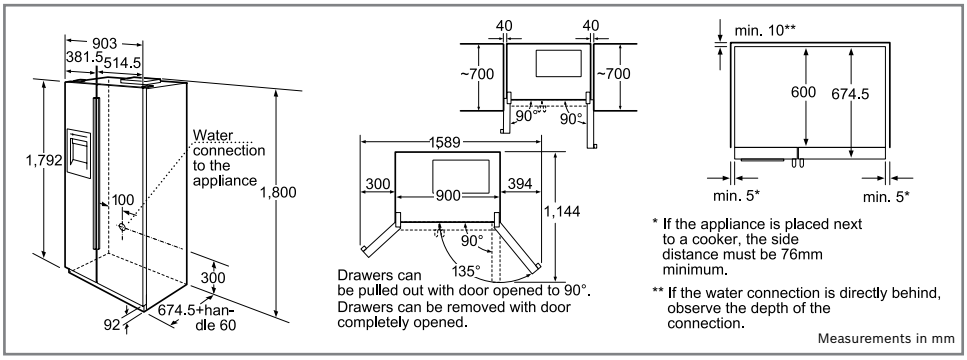

KAN58A55GB **N.B**. Doors need to be able to be opened to a minimum of 135° angle to allow the drawers to be fully accessible

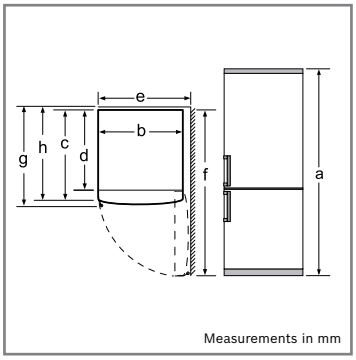

KGD36VI30G

Fridge freezer specifications

FRIDGE FREEZERS

		Logixx											
MODEL		**KGN 36XI42**	**KGN 49AW24G**	**KGN 39XW32G**	**KGN 34XL32G**	**KGN 34XW32G**	**KGD 36VI30G**	**KGN 36VW31G**	**KGN 34VL30G**	**KGN 34VW30G**	**KGN 34VL20G**	**KGN 34VB20G**	**KGN 34VW20G**
PERFORMANCE AND CONSUMPTION													
Energy efficiency class		A+++	A+	A++	A++	A++	A++	A++	A++	A++	A+	A+	A+
Energy consumption annual	kWh/annum	172	329	268	262	262	239	239	244	244	293	293	295
Total unit net capacity	l	320	399	355	305	305	319	319	304	304	277	277	277
Refrigerator net capacity		234	307	269	200	200	233	233	199	199	184	184	184
Freezer net capacity		86	92	86	105	105	86	86	105	105	93	93	93
Noise level (dB(A) re 1 pW)		37	43	42	42	42	42	42	42	42	42	42	42
DESIGN FEATURES													
Main colour of product		Inox-easyclean	White	White	Inox-look	White	Inox-easyclean	White	Inox-look	Inox-look	Inox-look	Black	White
Door handle type		Vertical bar handle	Vertical bar handle	Vertical bar handle	Vertical bar handle	Vertical bar handle	Vertical bar handle	Integrated vertical handle	Integrated vertical handle	Integrated vertical handle	Vertical bar handle	Vertical bar handle	Vertical bar handle
Colour / Material body		Inox-easyclean	White	White	Inox-look	White	Inox-easyclean	White	Chrome Inox-metallic	Chrome Inox-metallic	Chrome Inox-metallic	Black	White
Colour / Material door		Inox-easyclean	White	White	Stainless steel-look	White	Inox-easyclean	White	Inox-look	Inox-look	Inox-look	Black	White
Placement of temperature control		Exterior	Exterior	Exterior	Exterior	Exterior	-	-	-	-	-	-	-
Door hinge position		Right reversible	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible
Cooling circuits		2	2	2	2	2	2	2	2	2	2	2	2
Compressors		1	1	1	1	1	1	1	1	1	1	1	1
Evaporators		-	-	-	-	-	-	-	-	-	-	-	-
Temperature zones fridge		1	1	-	1	1	1	1	1	1	1	1	1
Temperature display fridge		Exterior digital	Exterior digital	-	Exterior digital	Exterior digital	-	-	-	-	-	-	-
Electronic display		LED	2 x LED	LED	LED	LED	LED	LED	LED	LED	LED	LED	LED
FOOD FRESHNESS SYSTEM													
Food preservation containers		Chiller Box/ Crisper Box	HydroFresh/ Chiller Box	Chiller Box/ Crisper Box	Chiller Box/ Crisper Box	Chiller Box/ Crisper Box	Chiller Box/ Crisper Box	Chiller Box/ Crisper Box	Chiller Box/ Crisper Box	Chiller Box/ Crisper Box	Crisper Box	Crisper Box	Crisper Box
MultAirflow system		●	●	●	●	●	●	●	●	●	●	●	●
KEY FEATURES - FRIDGE SECTION													
Thermometer fridge section		Digital	Digital	Digital	Digital	Digital	-	-	-	-	-	-	-
Range of temperature	°C	4-8	4-8	4-8	4-8	4-8	4-8	4-8	4-8	4-8	4-8	4-8	4-8
Fast supercool switch		●	●	●	●	●	-	-	-	-	-	-	-
Shelves for bottles		●	●	●	●	●	●	●	●	●	●	●	●
Glass safety shelves in fridge compartment		4	4	5	4	4	4	4	4	4	4	4	4
Number of easy pull-out shelves		2	3	2	0	0	2	2	2	2	3	3	3
Flexishelf for additional storage		-	-	-	-	-	-	-	-	-	-	-	-
Egg racks		1	3	1	1	1	1	1	1	1	1	1	1
Shelves in door		3	4	4	3	3	3	3	3	3	3	3	3
2.5 litre water tank with Brita filter		-	-	-	-	-	l	-	-	-	-	-	-
Light		●	●	●	●	●	●	●	●	●	●	●	●
Door bins in fridge		1	2	2	1	1	2	2	2	2	2	2	2
Easylift flexible shelf in door		-	-	-	-	-	-	-	-	-	-	-	-
KEY FEATURES - FREEZER SECTION													
Freezer drawers		3	3	3	3	3	3	3	3	3	3	3	3
Freezer flaps		-	-	-	-	-	-	-	-	-	-	-	-
Thermometer in freezer section		Digital	Digital	Digital	Digital	Digital	Digital	Analog	Analog	Analog	Digital	Digital	Digital
Storage period in power failure	hours	17	16	16	16	16	16	16	16	16	14	14	14
Door bins in freezer		-	1	-	-	-	-	-	-	-	1	1	1
NoFrost system		Full	Full	Full	Full	Full	Full	Full	Full	Full	Full	Full	Full
Defrost process freezer section		NoFrost	NoFrost	NoFrost	NoFrost	NoFrost	NoFrost	NoFrost	NoFrost	NoFrost	NoFrost	NoFrost	NoFrost
Thaw water drainage system for LowFrost		-	-	-	-	-	-	-	-	-	-	-	-
Door opened indicator freezer		●	●	●	●	●	●	●	●	●	-	-	-
Fast Superfreeze switch		●	●	●	●	●	●	●	●	●	●	●	●
Water dispenser		-	-	-	-	-	●	-	-	-	-	-	-
FUNCTIONS													
Warning signal / malfunction		Visual and audible	Visual and audible	Visual and audible	Visual and audible	Visual and audible	Visual and audible	Visual and audible	Visual and audible	Visual and audible	-	-	-
DIMENSIONS AND INSTALLATION													
Climate class		SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T
Connection Rating	W	160	150	160	160	160	160	160	160	160	120	120	120
Current	A	10	10	10	10	10	10	10	10	10	10	10	10
Voltage	V	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Frequency	Hz	50	50	50	50	50	50	50	50	50	50	50	50
Length electrical supply cord	mm	2400	2400	2400	2400	2400	2400	2400	2400	2400	2400	2400	2400
Height of the product	mm	1860	2000	2010	1860	1860	1860	1860	1860	1860	1850	1850	1850
Width of the product	mm	600	700	600	600	600	600	600	600	600	600	600	600
Depth of the product		650	620	650	650	650	650	650	650	650	650	650	650
Depth with open door 90 degree	mm	-	1280	-	-	-	-	-	-	-	1170	1170	1170
Included accessories		1 x berry tray, 1 x egg tray, 1 x ice cube tray	2 x ice packs, 1 x berry tray, 2 x egg tray, 2 x ice cube tray	1 x berry tray, 1 x egg tray, 1 x ice cube tray	1 x berry tray, 1 x egg tray, 1 x ice cube tray	1 x berry tray, 1 x egg tray, 1 x ice cube tray	1 x berry tray, 1 x egg tray, 1 x ice cube tray	1 x berry tray, 1 x egg tray, 1 x ice cube tray	1 x berry tray, 1 x egg tray, 1 x ice cube tray	1 x berry tray, 1 x egg tray, 1 x ice cube tray	1 x egg tray, 1 x ice cube tray	1 x egg tray, 1 x ice cube tray	1 x egg tray, 1 x ice cube tray
EAN code		4242002809533	4242002703589	4242002809571	4242002809090	4242002809106	4242002773452	4242002741291	4242002725345	4242002725338	4242002709260	4242002709277	4242002709284

[1] EC rating scheme designed to compare energy efficiency of comparable appliances.
[2] Climate Class SN: Room temperatures +10°C to +32°C
Climate Class N: Room temperatures +16°C to +32°C
Climate Class ST: Room temperatures +18°C to +38°C
Climate Class T: Room temperatures +18°C to +43°C
[3] **** Freezer at -18°C or less, for fresh & frozen food.
[4] Freezer capacity quoted may only be attained by switching to constant operation and not on a 24 hour basis.
[5] Temperature increases from -18°C to -9°C, time taken is when appliance is full. When only partially stocked, less time is involved.
[6] Actual energy consumption will depend on how the appliance is used and where it is located.

As a guideline A++ means very economical, A+ economical, A is average, and B-G represents a high consumption. Consumption rates are quoted to assist comparisons for different appliances. During actual operation, consumption may vary slightly. All cooling appliances require adequate ventilation (min. 200cm²) Please refer to user / installation instructions. Wine coolers require a ventilation distance of 4cm around the appliance for optimum performance on installation.

Data in this table valid as of April 2015.
Subject to modification without prior notice.

			Exxcel			Classixx					
KGN 30VW20G	**KGN 30VL20G**	**KGE 36BW41G**	**KGE 49BW41G**	**KGE 49BI30G**	**KGV 39VL31G**	**KGV 39VW32G**	**KGV 36VL32G**	**KGV 36VW32G**	**KGV 33VL31G**	**KGV 33XW30G**
A+	A+	A+++	A+++	A++	A++	A++	A++	A++	A++	A++
266	266	149	175	255	238	238	226	226	219	219
250	250	302	412	412	342	342	307	307	286	286
184	184	214	301	301	248	248	213	213	192	192
66	66	88	111	111	94	94	94	94	94	94
42	42	38	34	39	39	39	39	39	39	39
White	Inox-look	White	White	Inox-easyclean	Inox-look	White	Inox-look	White	Inox-look	White
Vertical bar handle	Vertical bar handle	Vertical handle bar	Vertical handle bar	Vertical bar handle	Vertical handle bar	Integrated vertical handle	Integrated vertical handle	Integrated vertical handle	Integrated vertical handle	Integrated vertical handle
White	Inox-look	White	White	Inox-easyclean	Inox-look	White	Inox-look	White	Inox-look	White
White	Stainless steel-look	White	White	Inox-easyclean	Stainless steel-look	White	Stainless steel-look	White	Stainless steel-look	White
-	-	-	Interior	Interior	-	-	-	-	-	-
Right reversible	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible	Right reversible
2	2	2	2	2	1	1	1	1	1	1
1	1	1	1	1	1	1	1	1	1	1
-	-	-	-	-	-	-	-	-	-	-
1	1	1	1	1	1	1	1	1	1	1
-	-	-	Interior digital	Interior digital	-	-	-	-	-	-
LED	LED	LED	LED	LED	LED	LED	LED	LED	LED	LED
Crisper Box	Crisper Box	Chiller Box/ Crisper Box	Chiller Box/ Crisper Box	Chiller Box/ Crisper Box	Crisper Box	Crisper Box	Crisper Box	Crisper Box	Crisper Box	Crisper Box
●	●	-	●	●	-	-	-	-	-	-
-	-	-	Digital	Digital	-	-	-	-	-	-
4-8	4-8	4-8	4-8	4-8	4-8	4-8	4-8	4-8	4-8	4-8
-	-	●	-	●	-	-	-	-	-	-
●	●	●	●	●	●	●	●	●	●	●
4	4	4	3	5	5	5	4	4	4	4
3	3	2	1	2	2	2	2	2	2	2
-	-	3	-	4	4	4	2	2	2	2
1	1	1	1	1	1	1	1	1	1	1
3	3	3	3	4	4	4	3	3	3	3
-	-	-	-	-	-	-	-	-	-	-
●	●	●	●	●	●	●	●	●	●	●
2	2	1	2	2	3	3	2	2	2	1
-	-	-	-	-	-	-	-	-	-	-
3	3	3	3	3	3	3	3	3	3	3
-	-	-	-	-	-	-	-	-	-	-
-	Digital	-	Digital	-	-	-	-	-	-	-
13	13	35	14	44	23	23	23	23	23	23
1	1	-	1	-	-	-	-	-	-	-
Full	Full	LowFrost	Full	LowFrost	LowFrost	LowFrost	LowFrost	LowFrost	LowFrost	LowFrost
NoFrost	NoFrost	Manual	NoFrost	Manual	Manual	Manual	Manual	Manual	Manual	Manual
-	-	●	-	●	●	●	●	●	●	●
-	-	●	-	●	-	-	-	-	-	-
●	●	●	●	●	●	●	●	●	●	●
-	-	-	-	-	-	-	-	-	-	-
-	-	Visual and audible	Visual and audible	Visual and audible	-	-	-	-	-	-
SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T	SN-T
120	120	160	120	160	125	125	125	125	125	125
10	10	10	10	10	10	10	10	10	10	10
220-230	220-230	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
50	50	50	50	50	50	50	50	50	50	50
2400	2400	2400	2400	2400	2400	2400	2400	2400	2400	2400
1700	1700	1860	1850	2010	2010	2010	1860	1860	1760	1760
600	600	600	600	700	600	600	600	600	600	600
650	650	650	650	650	650	650	650	650	650	650
-	-	-	-	-	–	-	-	-	-	-
1 x egg tray, 1 x ice cube tray	1 x egg tray, 1 x ice cube tray	2 x cold accumulator, 1 x egg tray, 1 x ice cube tray	1 x egg tray, 1 x ice cube tray	2 x cold accumulator, 1 x egg tray, 1 x ice cube tray	1 x egg tray, 1 x ice cube tray	1 x egg tray, 1 x ice cube tray	1 x egg tray, 1 x ice cube tray	1 x egg tray, 1 x ice cube tray	1 x egg tray, 1 x ice cube tray	1 x egg tray, 1 x ice cube tray
4242002709246	4242002709253	4242002798387	4242002798752	4242002798806	4242002798936	4242002798943	4242002799827	4242002799834	4242002800684	4242002800820

[1] EC rating scheme designed to compare energy efficiency of comparable appliances.
[2] Climate Class SN: Room temperatures +10°C to +32°C
Climate Class N: Room temperatures +16°C to +32°C
Climate Class ST: Room temperatures +18°C to +38°C
Climate Class T: Room temperatures +18°C to +43°C
[3] **★★★★** Freezer at -18°C or less, for fresh & frozen food.
[4] Freezer capacity quoted may only be attained by switching to constant operation and not on a 24 hour basis.
[5] Temperature increases from -18°C to -9°C, time taken is when appliance is full. When only partially stocked, less time is involved.
[6] Actual energy consumption will depend on how the appliance is used and where it is located.

As a guideline A++ means very economical, A+ economical, A is average, and B-G represents a high consumption. Consumption rates are quoted to assist comparisons for different appliances. During actual operation, consumption may vary slightly. All cooling appliances require adequate ventilation (min. 200cm²) Please refer to user / installation instructions. Wine coolers require a ventilation distance of 4cm around the appliance for optimum performance on installation.

Data in this table valid as of April 2015.
Subject to modification without prior notice.

Fridge freezer specifications

AMERICAN STYLE

		Exxcel	Classixx	
MODEL		**KAD 62V40GB**	**KAN 62V41GB**	**KAN 58A55GB**
PERFORMANCE AND CONSUMPTION				
Energy efficiency class		A+	A+	A+
Annual energy consumption	kWh	455	497	447
Total unit net capacity	litres	559	604	501
Refrigerator net capacity	litres	382	385	346
Freezer net capacity	litres	177	219	155
Noise level dB (re 1pW)		44	44	45
DESIGN FEATURES				
Main colour of product		Inox-look	Inox-look	Black
Colour of sides		Chrome inox-metallic	Chrome Inox-metallic	Black
Type of handle		Vertical bar handle	Vertical bar handle	Vertical bar handle
Door hinge		Left and right	Left and right	Left and right
Number of compressors		1	1	1
Number of cooling circuits		2	2	1
Number of evaporators		2	2	1
FOOD FRESHNESS SYSTEMS				
Range of temperatures	℃	4-8	4-8	4-8
Humidity control drawer		●	-	-
Anti Bacterial		●	●	-
Food preservation containers		CoolBox	CoolBox	CoolBox
MultiAirflow system		●	●	●
KEY FEATURES - FRIDGE SECTION				
No. of temperature zones fridge		1	1	1
Number of glass safety shelves in fridge compartment		4	4	3
Number of adjustable shelves in fridge compartment		3	3	2
Type of shelves		Full Extension	Full Extension	Stationary
Drawers with telscopic rails		Partial Extension	Partial Extension	-
Number of door bins in fridge		2	2	2
EasyLift flexible shelf in door		●	●	-
Fast cooling switch		●	●	●
KEY FEATURES - FREEZER SECTION				
No frost system		Full	Full	Full
Fast freezing switch		●	●	●
Shelf adjustability		●	●	-
Automatic motor-driven ice-maker		●	-	●
Water filter replacement indicator		-	-	●
Water tank		●	-	●
Dispenser - crushed ice, ice cubes, quick ice, water, water filter		●	-	●
Included accessories: ice-packs/connection hose/ egg tray		– / 1 / 1	-	-
FUNCTIONS				
Electronic display		2 x LED display	2 x LED display	2 x LED display
DIMENSIONS AND INSTALLATION				
Climate class		SN-T	SN-T	SN-T
Height of the product	mm	1756	1756	1800
Width of the product	mm	910	910	900
Depth of product	mm	725	725	674
Width with opened door (90°)	mm	948	948	1058
Depth of the product door open	mm	1158	1158	1144
EAN code		4242002512464	4242002645681	4242002642116

[1] EC rating scheme designed to compare energy efficiency of comparable appliances.
[2] Climate Class SN: Room temperatures +10℃ to +32℃
Climate Class N: Room temperatures +16℃ to +32℃
Climate Class ST: Room temperatures +18℃ to +38℃
Climate Class T: Room temperatures +18℃ to +43℃
[3] **** Freezer at -18℃ or less, for fresh & frozen food.
[4] Freezer capacity quoted may only be attained by switching to constant operation and not on a 24 hour basis.
[5] Temperature increases from -18℃ to -9℃, time taken is when appliance is full. When only partially stocked, less time is involved.
[6] Actual energy consumption will depend on how the appliance is used and where it is located.

As a guideline A++ means very economical, A+ economical, A is average, and B-G represents a high consumption. Consumption rates are quoted to assist comparisons for different appliances. During actual operation, consumption may vary slightly. All cooling appliances require adequate ventilation (min. 200cm²) Please refer to user / installation instructions. Wine coolers require a ventilation distance of 4cm around the appliance for optimum performance on installation.

Data in this table valid as of April 2015.
Subject to modification without prior notice.

Notes

Notes

Notes

Contact Bosch Customer Service
To arrange an engineer visit, obtain product advice or order replacement spare parts or accessories visit www.bosch-home.co.uk or call **0344 892 8979**

Republic of Ireland customers should visit www.bosch-home.ie to arrange an engineer's visit or to order spare parts and accessories, or call **(01) 450 2655**

Bosch Home UK

@BoschHomeUK

Bosch
Grand Union House
Old Wolverton Road, Wolverton
Milton Keynes MK12 5PT
www.bosch-home.co.uk

BSH Home Appliances Limited
M50 Business Park
Ballymount, Dublin 12
Tel: 1890 626 041
www.bosch-home.ie

Calls are charged at the basic rate, please check with your telephone service provider for exact charges.

Disclaimer: This brochure is current as from the publication date and supersedes all previous brochures for these products. This brochure should not be regarded as an infallible guide nor as an offer for sale of any particular product. Whilst BSH Home Appliances Ltd believes that all information contained within this brochure is correct at the time of going to print, no representation or warranty, express or implied, is or will be made and no responsibility or liability is or will be accepted by BSH Home Appliances Ltd in relation to the accuracy or completeness of this information and any liability is expressly disclaimed. To the extent permitted by law, BSH Home Appliances Ltd expressly excludes: i) all conditions, warranties and other terms which might otherwise be implied by statute, common law or the law of equity and ii) any liability for any direct, indirect or consequential loss or damage (including, without limitation, damages for loss of business or loss of profits) arising in contract, tort or otherwise from the use of or reliance on any information contained within this brochure or from any action or decision taken as a result of such use or reliance. BSH Home Appliances Ltd reserves the right to modify technical data and all other information contained within this brochure without notice. All rights reserved. No part of this publication may be reproduced in any form or without the prior written permission of BSH Home Appliances Ltd. All colour variations are due to the limitations of the printing process. This brochure is printed on environment-friendly chlorine-free bleached paper.

April 2015

FSC www.fsc.org
MIX
Paper from responsible sources
FSC® C008161